


Burian 2126 Aluminium Channel

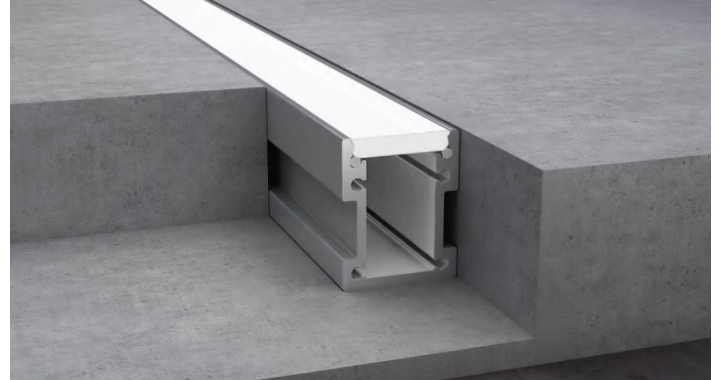



The AL6063-T aluminium profile undergoes a high quality surface treatment

The thick polycarbonate cover produces a no dot soft and uniform light effect

Profile and cover have IK10 impact and IP65 ingress protection and thus can be used widely in indoor & outdoor floors

When used in outdoor applications it is recommended to use an IP68 rated led strip cut and re-sealed accordingly to suit length of profile

Special orders can be made with complete fitting assembled including profile, cover, led strip inside, cable gland and pre-wired tail to length from the fitting

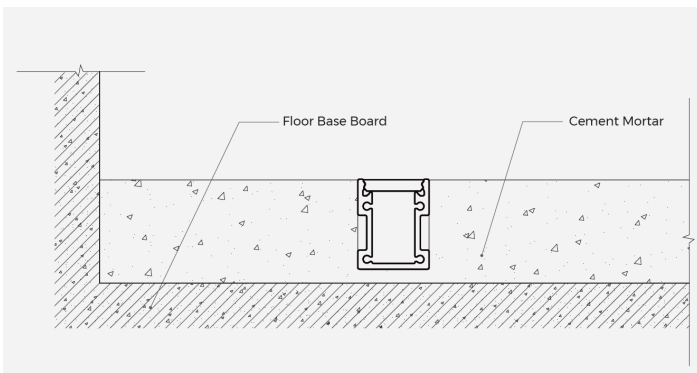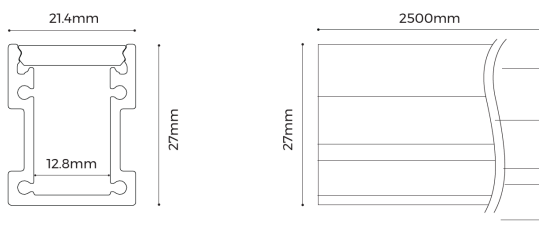

Model No **NL_HC_BURIAN2126_PROFILE**

Material	AL6063-T5
Surface Processing	Anodized
Diffuser	Opal Polycarbonate
Light Transmittance	>75%
Heat Dissipation	Max 19.2W/m

Accessories

End caps

End caps silver [without hole]

NL_HC_BURIAN2126_ENDCAPS
[2 pieces per set]



End caps silver [with hole]

NL_HC_BURIAN2126_EC-HOLE
[2 pieces per set]

