


www.nirvanalighting.com




*Architectural &
Commercial Collection*

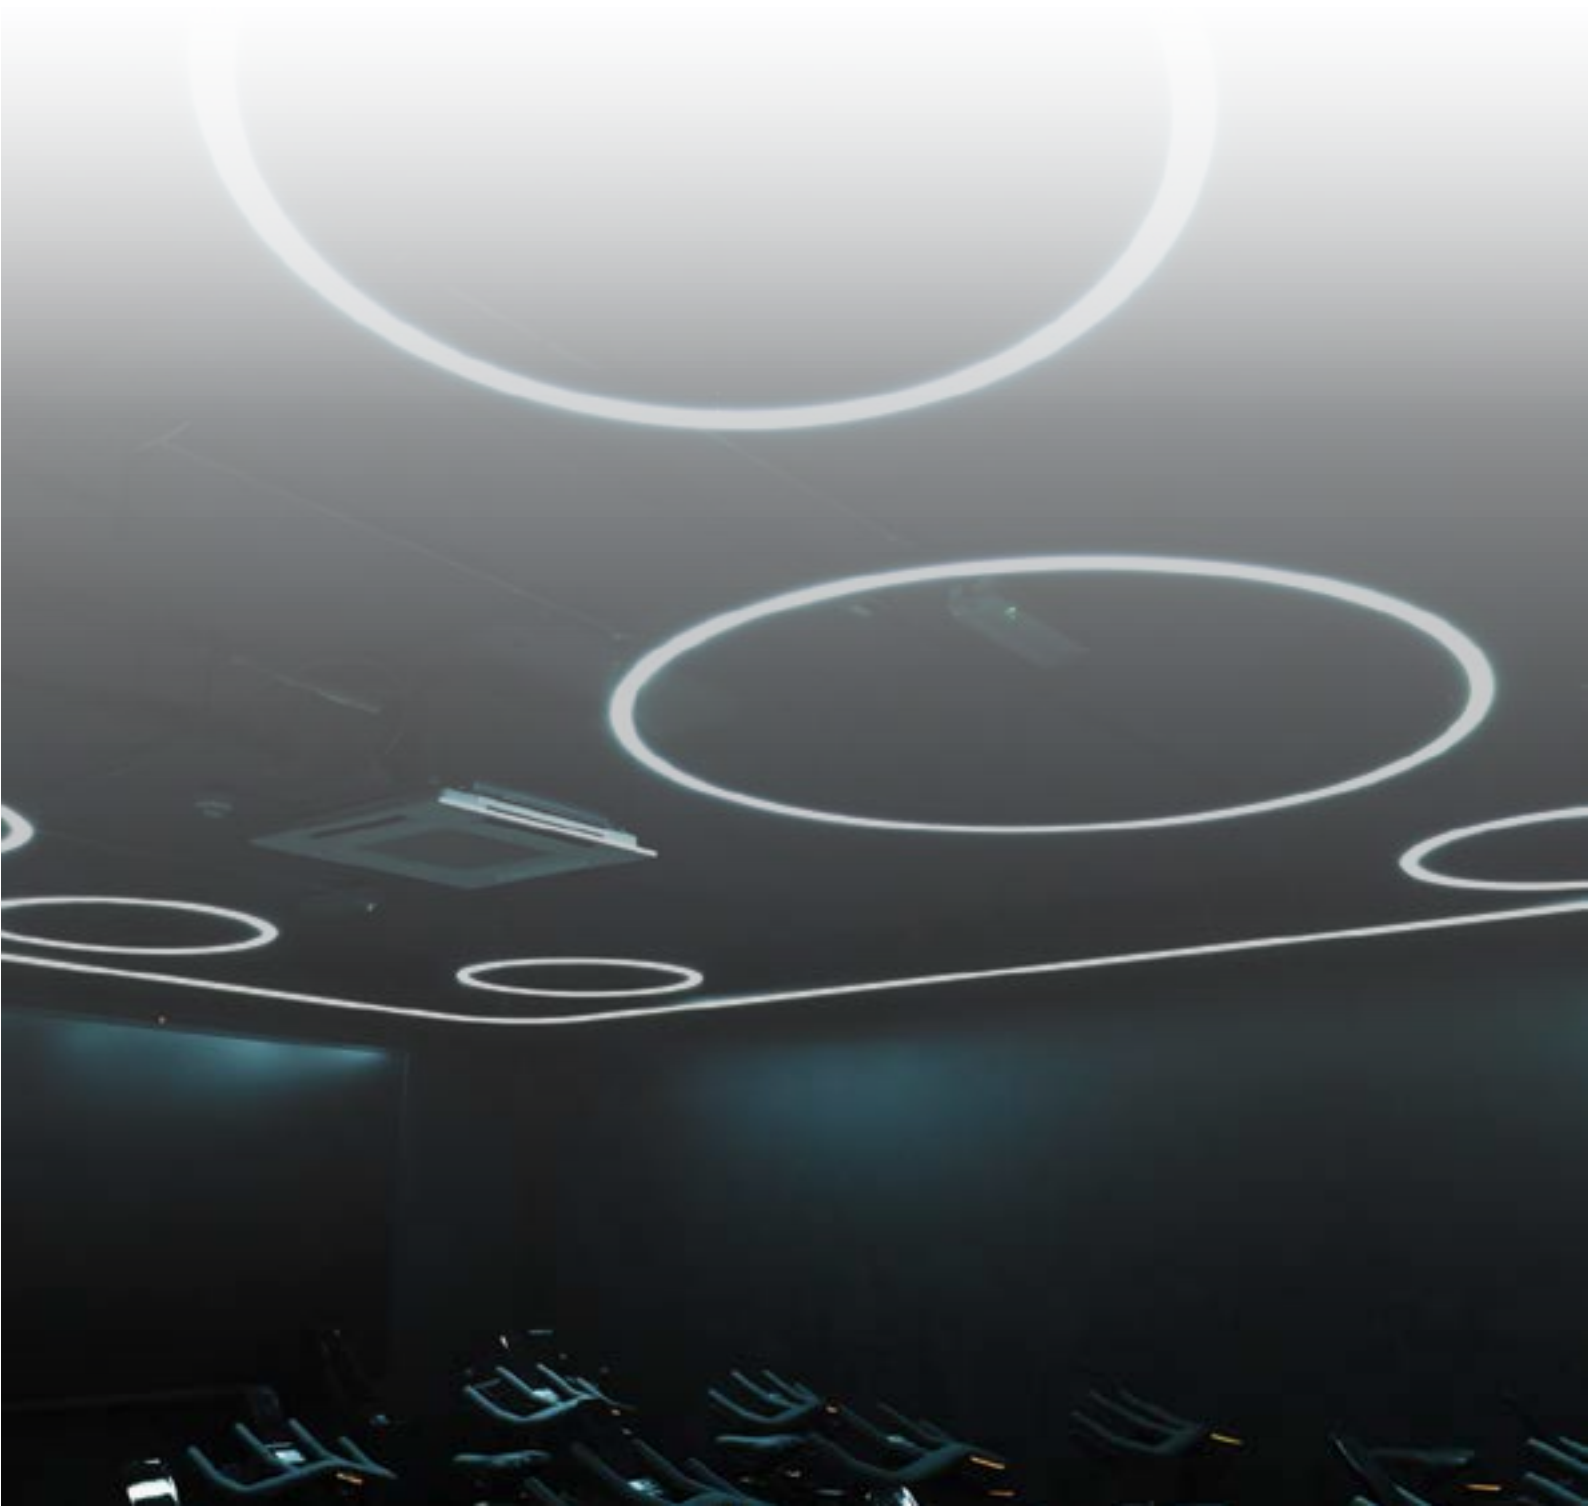

Shuttle 1 Suspension

The Shuttle 1 suspension, producing both up and down-lighting, has a combination of minimalist geometry and elegant streamlines, the contrasting experience of black, breaks the visual balance of the space and creates a high-level decorative interest. The subtle up-lighting from the mid section highlights the champagne gold finish. Available in a 3 light, 4 light and 9 light.

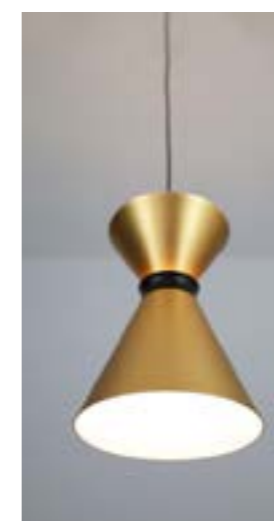

Lamp	Inbuilt 12W LED
Material	Metal
Finish	Champagne
Dimmable	Yes
Kelvin	3000K

Dimensions

Max Drop	1800mm (adjustable)
Lamp height	205mm
Max diameter	150mm
Ceiling plate ø	70mm
Ceiling plate length	110mm



Shuttle 3 Suspension

The Shuttle 3 suspension, producing both up and down-lighting, has a combination of minimalist geometry and elegant streamlines, the contrasting experience of black, breaks the visual balance of the space and creates a high-level decorative interest. The subtle up-lighting from the mid section highlights the champagne gold finish. Available in a 1 light, 4 light and 9 light.

Lamp	Inbuilt 36W LED
Finish	Champagne
Dimmable	Yes
Kelvin	3000K

Dimensions	
Width	900mm
Max drop	1800mm (adjustable)
Lamp height	205mm
Ceiling plate dimensions	560mm x 170mm




Shuttle 4 Suspension

The Shuttle 4 suspension, producing both up and down-lighting, has a combination of minimalist geometry and elegant streamlines, the contrasting experience of black, breaks the visual balance of the space and creates a high-level decorative interest. The subtle up-lighting from the mid section highlights the champagne gold finish. Available in a 1 light, 3 light and 9 light.

Lamp	Inbuilt 48W LED
Finish	Champagne
Dimmable	Yes
Kelvin	3000K

Dimensions

Arm length	470mm
Max drop	1800mm (adjustable)
Lamp height	205mm
Ceiling plate ø	270mm
Diameter	800mm

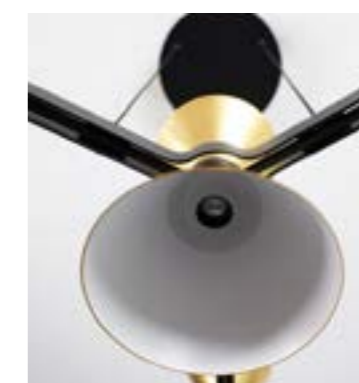

Shuttle 9 Suspension

The Shuttle 9 suspension, producing both up and down-lighting, has a combination of minimalist geometry and elegant streamlines, the contrasting experience of black, breaks the visual balance of the space and creates a high-level decorative interest. The subtle up-lighting from the mid section highlights the champagne gold finish. Available in a 1 light, 3 light and 4 light.

Lamp	Inbuilt 108W LED
Material	Metal
Finish	Champagne
Dimmable	Yes
Kelvin	3000K

Dimensions	
Max drop	2500mm (adjustable)
Width	750mm
Plate ø	700mm
Plate projection	50mm



Circles Gold LED Wall Light



The Circles gold LED wall light, perfect for projecting light from the top and bottom onto the wall to create cosy lighting. With a structure based on three thin circular structures, the wall lamp offers an elegant design.

Lamp	Inbuilt 12.5W LED
Material	Iron
Finish	Gold
IP Rating	IP20
Dimensions	
Diameter	355mm
Projection	70mm



Circles Black LED Wall Light

The Circles black LED wall light, perfect for projecting light from the top and bottom onto the wall to create cosy lighting. With a structure based on three thin circular structures, the wall lamp offers an elegant design.

Lamp	Inbuilt 12.5W LED
Material	Iron
Finish	Black
IP Rating	IP20
Dimensions	
Diameter	355mm
Projection	70mm



CE  IP20

Peoples Sand Pendant



The Peoples Sand Pendant, providing geometric aesthetics, with its structure composing of two hemispheres, one larger and one smaller. Consists of 2 LED light sources; one with indirect lighting and one with direct, spotlighting.

Can be used in an architectural or hospitality setting.

Lamp	Inbuilt 10W LED
Material	Metal
Dimmable	Yes
Kelvin	3000K

Dimensions	
Diameter	230mm
Fitting height	160mm
Total drop	650mm
Ceiling plate dimensions	ø135mm x L35mm



Peoples Black Pendant

The Peoples Sand Pendant, providing geometric aesthetics, with its structure composing of two hemispheres, one larger and one smaller. Consists of 2 LED light sources; one with indirect lighting and one with direct, spotlighting.

Can be used in an architectural or hospitality setting.

Lamp	Inbuilt 10W LED
Material	Metal
Kelvin	3000K
Dimmable	Yes

Dimensions	
Diameter	230mm
Fitting height	160mm
Total drop	650mm
Ceiling plate dimensions	ø135mm x L35mm





Acorn 4 Light LED Suspension

The Acorn Suspension is designed with a sleek, modern aesthetic, featuring a smooth brass finish. Each pendant light has an elongated, oval shape that tapers slightly towards the bottom, resembling an acorn. The lights are suspended by black cords, creating a visually interesting arrangement. The light emitted from each fitting is directed downwards, suggesting they are likely intended for task or accent lighting.

Lamp	Inbuilt 4 x 24W LED
Material	Metal
Finish	Champagne Gold
Kelvin	3000K

Dimensions	
Length	2412mm
Width	160mm
Height	1300mm



Beamy Suspension

The Beamy Suspension with 3 sources of LED touch activated lighting. One ring of subtle indirect upward lighting, and two sources of downward lighting, one direct and one indirect.

Lamp	Inbuilt 10W
Material	Metal
Dimmable	Yes
Kelvin	3000K

Dimensions	
Diameter	90mm
Height	85mm
Drop	1000mm
Ceiling plate ø	115mm







Knurl Suspension

The Knurl suspension light can be used to make a variety of interior spaces, such as lofts, minimalist spaces, or trendy cafes, by utilising its graphic lines and dual lighting capabilities.



Lamp	Inbuilt 21W LED
Dimmable	Yes
Kelvin	3000K
Finish	Adonized Champagne Gold

Dimensions	
Length	1200mm
Fitting height	230mm
Total drop	Option of 600mm/1150mm/1500mm
Ceiling plate ø	150mm

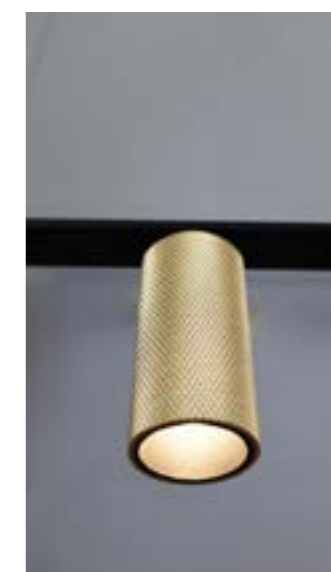

Luxem 25 Black Pendant



Luxem 25 Black Pendant has both upward & downward lighting. It's very sleek contemporary design would be ideal for over kitchen islands, dining room tables or office settings. With dali dimming, evenly diffused light for very efficient task luminosity but with the option of soft accent lighting for creating atmosphere

Matching wall light & white colour option available



Finish	Black RAL 9005
Wattage	38W
Voltage	230V
CCT	3000K
CRI	>90
Diffuser	opal up 19W/1700LM opal down 19W/1900LM
LED Driver	Built in dali dimmable
Material	Aluminum
Max Drop	1925mm
Length	1200mm
Dept	25mm
Height	100mm

CE IP20





Luxem 25 White Pendant



Luxem 25 White Pendant has both upward & downward lighting. It's very sleek contemporary design would be ideal for over kitchen islands, dining room tables or office settings. With dali dimming, evenly diffused light for very efficient task luminosity but with the option of soft accent lighting for creating atmosphere

Matching wall light & black colour option available



Finish	White RAL 9003
Wattage	38W
Voltage	230V
CCT	3000K
CRI	>90
Diffuser	opal up 19W/1700LM opal down 19W/1900LM
LED Driver	Built in dali dimmable
Material	Aluminum
Max Drop	1925mm
Length	1200mm
Dept	25mm
Height	100mm

CE IP20

Luxem 25 Black Wall Light



Luxem 25 Black Wall Light has both upward & downward lighting. It is a very sleek contemporary design with in built dali dimmable driver

Matching pendant & white colour option available

Finish	Black RAL 9005
Wattage	14W
Voltage	230V
CCT	3000K
CRI	>90
Diffuser	opal up 7W/540LM opal down 7W/540LM
LED Driver	Built in Dali dimmable
Material	Aluminum
Dimensions	
Length	600mm
Dept	25mm
Height	100mm

CE IP20



Luxem 25 White Wall Light



Luxem 25 White Wall Light has both upward & downward lighting. It is a very sleek contemporary design with in built dali dimmable driver

Matching pendant & black colour option available

Finish	White RAL 9003
Wattage	14W
Voltage	230V
CCT	3000K
CRI	>90
Diffuser	opal up 7W/540LM opal down 7W/540LM
LED Driver	Built in Dali dimmable
Material	Aluminium
Dimensions	
Length	600mm
Dept	25mm
Height	100mm

CE IP20

Dab Linear Suspension





The DAB linear suspension with a semicircular structure provides both up and down lighting. The aluminium housing ensures excellent heat dissipation

High luminous flux makes it ideal for offices or workshops etc

The combination of the lens and reflector achieves a low anti-glare UGR rating of <19

Fixture comes as 1652mm length with 1500mm suspension cable

Finish	Black
Wattage	60W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3000K
CRI	≥80
Lumens	6000
Beam width	Up to 110 °/Down 60 °
LED Driver	Built in ceiling plate
Dimmable	No
Material	Aluminium

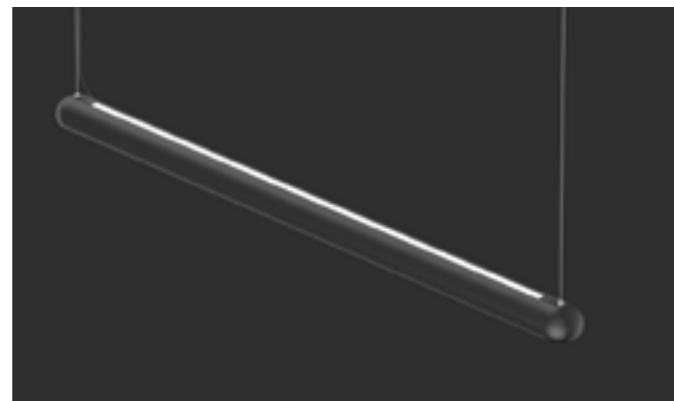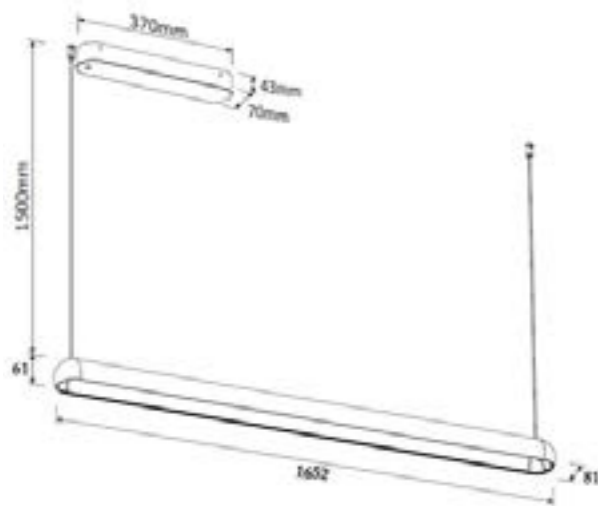

Newton Halo LED Ring Suspension



The Newton brushed french gold LED ring suspensions. Available in 2 sizes. Creates an impressive feature when hung in clusters. Driver included.

Lamp	37W or 73W LED 3000K inbuilt
Material	Metal
Finish	French Gold


Dimensions	
Diameter	600mm or 1200mm



Orestad XL Black Wall Light

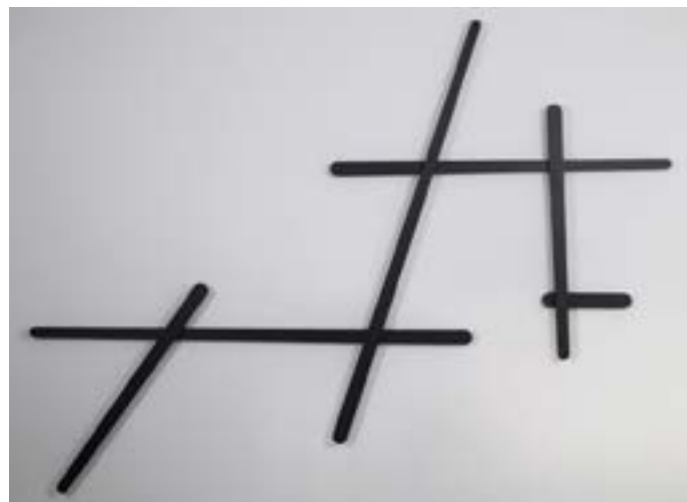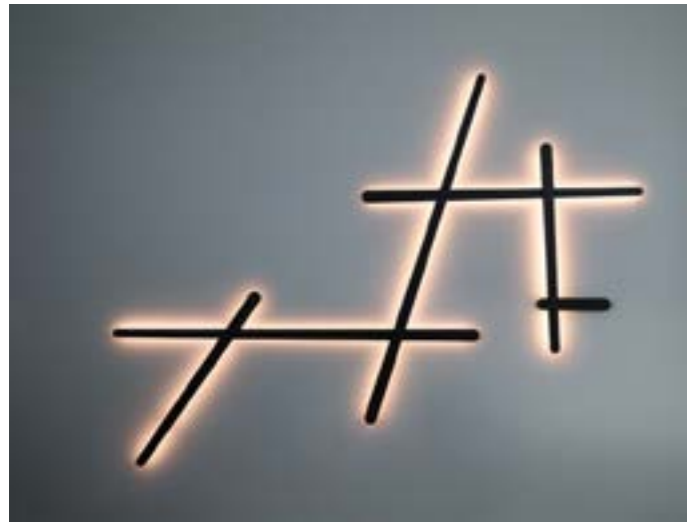

Lamp	Inbuilt 60W LED
Material	Metal
Dimmable	Yes
Kelvin	3000K
Dimensions	
Length	2320mm
Width	2071mm
Projection	57mm

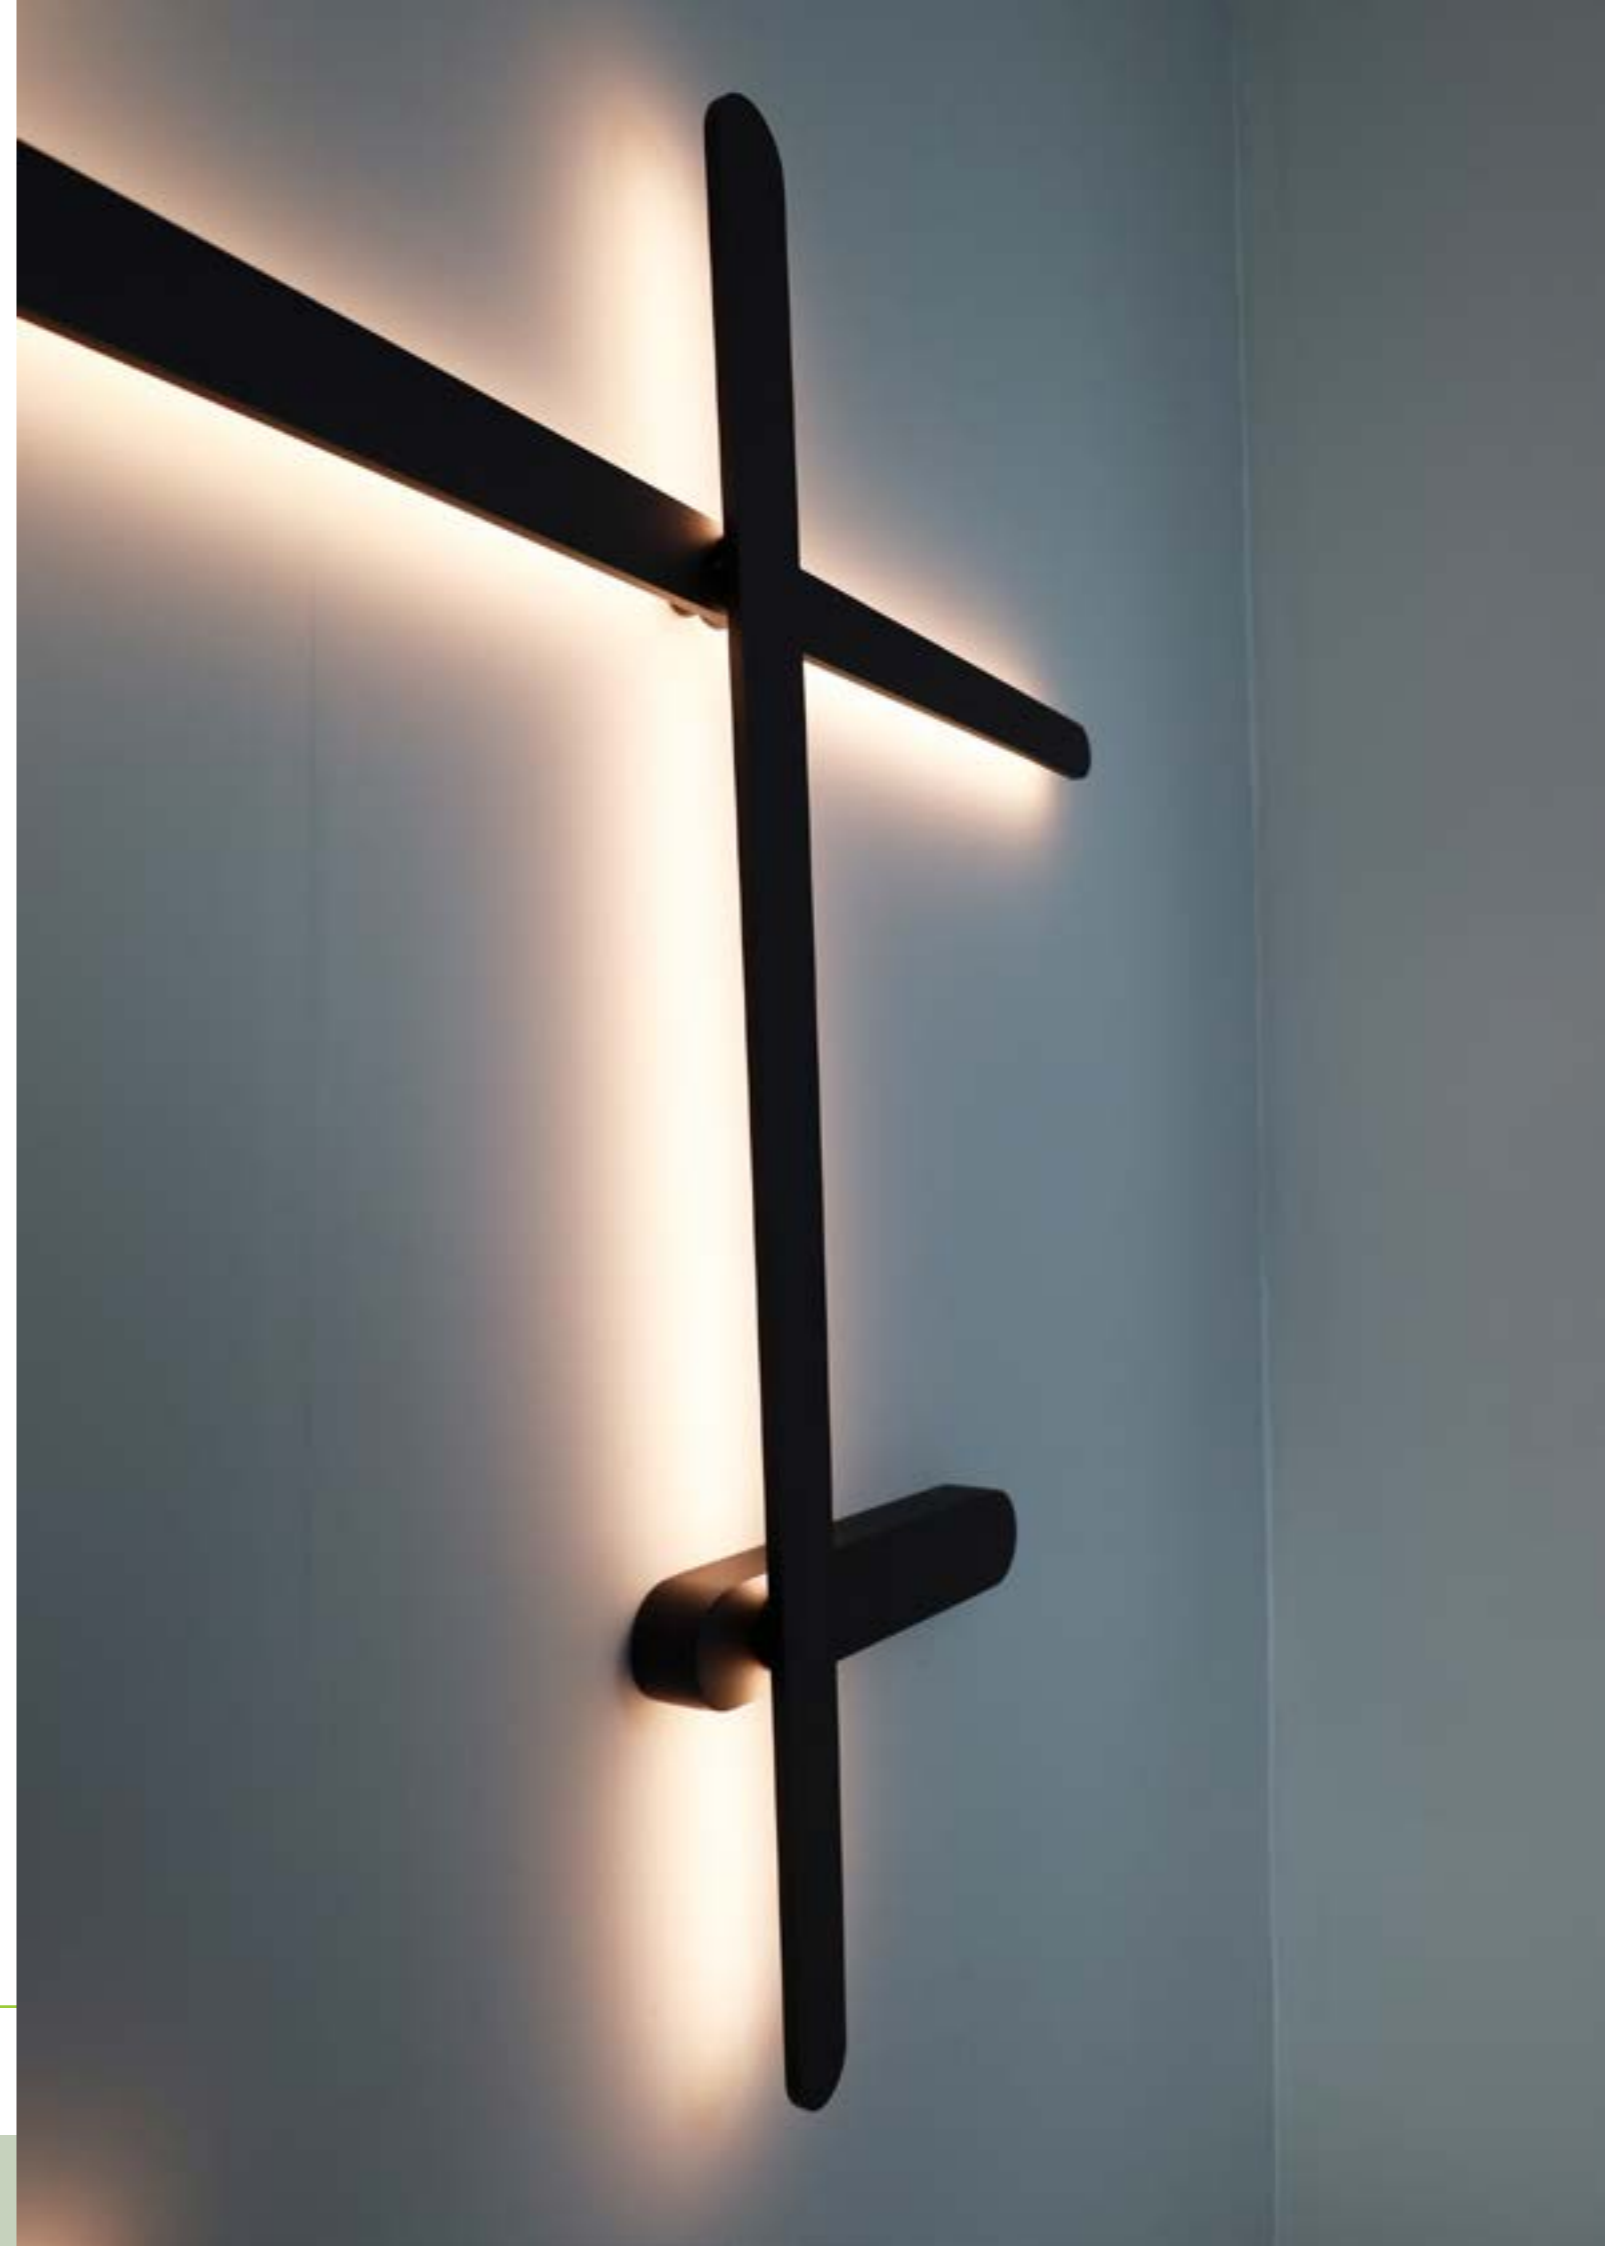





Towers Gold Wall/Ceiling Light

This ceiling/wall light adopts a minimalist line shape and modern design with a strong light transmission. Can be used in an architectural, living or bar and restaurant setting.

Lamp	Inbuilt 58W LED
Material	Metal
Dimmable	Yes
Kelvin	3000K

Dimensions

Length	800mm
Width	800mm
Projection	75mm

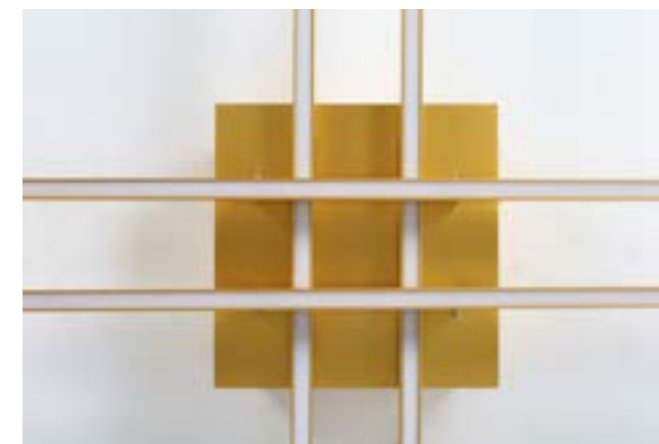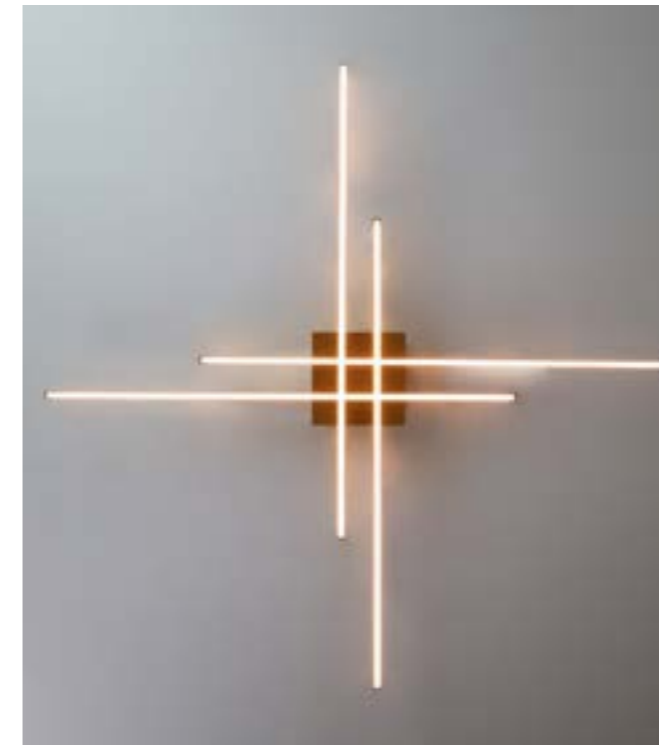


Assembly Linear Pendant



Finish	Satin Brass
Lamp	Inbuilt LED
Material	Metal
Max Wattage	26W

Dimensions	
Length	1150mm
Width	45mm
Drop	790mm (adjustable up to 3m)

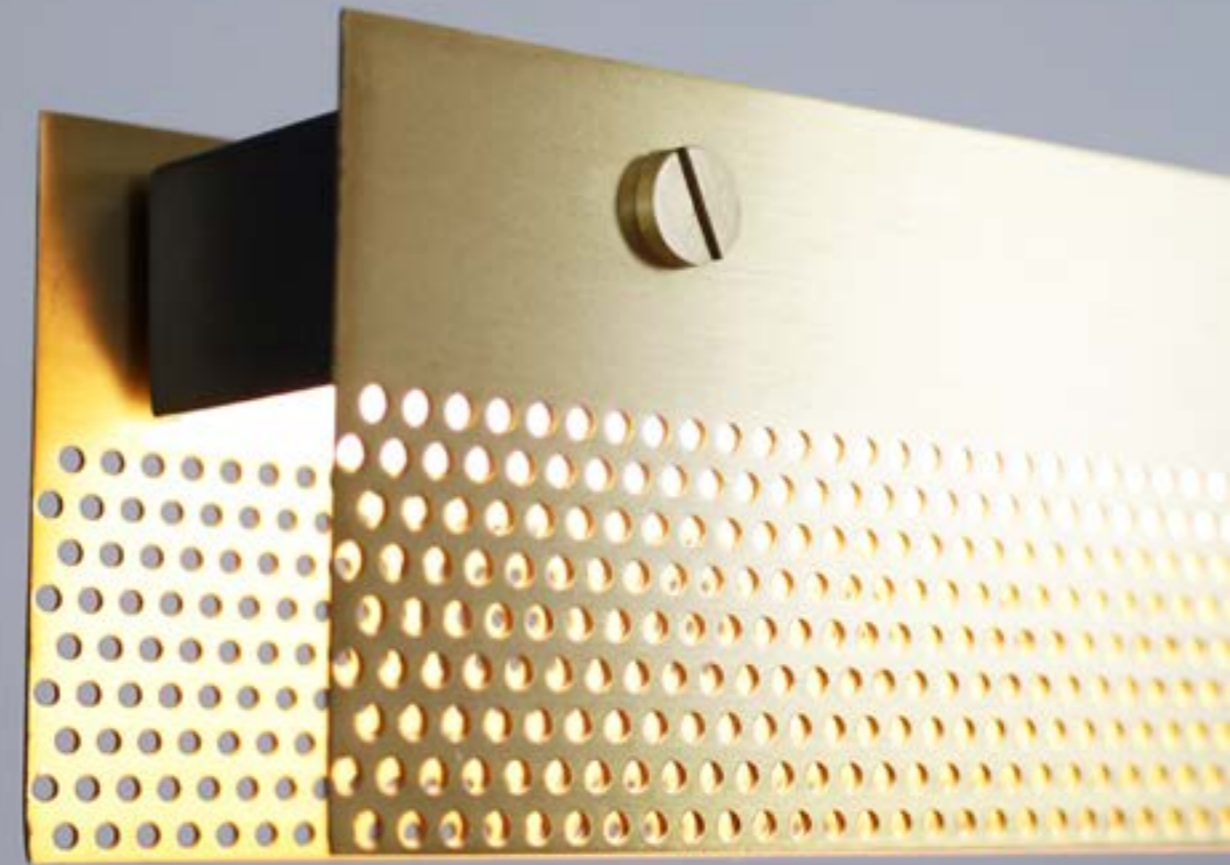

Assembly Round Pendant



Finish Satin Brass

Lamp Inbuilt LED

Material Metal

Max Wattage 48W

Dimensions

Diameter 860mm


Drop 780mm



Virgo 90cm Pendant Light

Lamp	Inbuilt 126W LED
Material	Metal
Finish	RAL1005 Yellow

Dimensions	
Diameter	900mm
Drop	2500mm

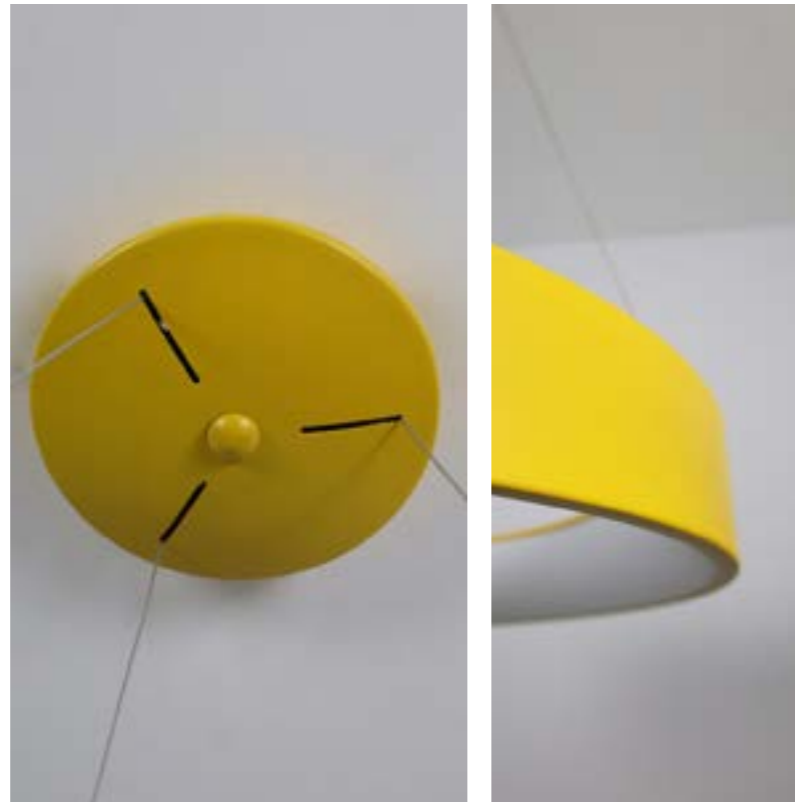



Lamp	Inbuilt 48W LED
Material	Metal
Finish	RAL1005 Yellow
IP Rating	IP20


Dimensions	
Diameter	600mm
Drop	2500mm



Telescope Black & Copper Pendant



Description	Pendant
Light Source	1x G9
Voltage	230 Volts
Material	Metal
Dimensions	
Max drop:1500mm	
Ceiling plate diameter:52mm	
Tube diameter:28mm	

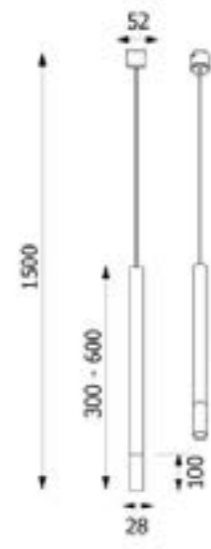

CE IP20




The Telescope Pendant is a very slim elegant pendant which can hang singularly or grouped together for a stunning effect

Telescope Black & Brass Pendant



Description	Pendant
Light Source	1x G9
Voltage	230 Volts
Material	Metal
Dimensions	
Max drop:1500mm	
Ceiling plate diameter:52mm	
Tube diameter:28mm	

The Telescope Pendant is a very slim elegant pendant which can hang singularly or grouped together for a stunning effect

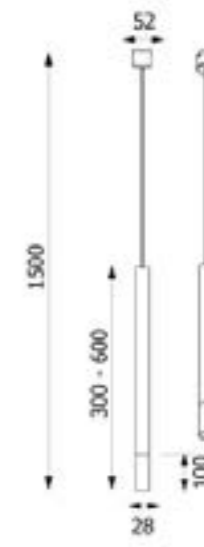


CE IP20

Telescope White & Copper Pendant



Description	Pendant
Light Source	1x G9
Voltage	230 Volts
Material	Metal
Dimensions	
Max drop:1500mm	
Ceiling plate diameter:52mm	
Tube diameter:28mm	

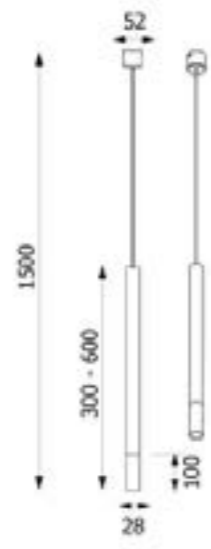

CE IP20




The Telescope Pendant is a very slim elegant pendant which can hang singularly or grouped together for a stunning effect

Telescope White & Gold Pendant



Description	Pendant
Light Source	1x G9
Voltage	230 Volts
Material	Metal
Dimensions	
Max drop:1500mm	
Ceiling plate diameter:52mm	
Tube diameter:28mm	

The Telescope Pendant is a very slim elegant pendant which can hang singularly or grouped together for a stunning effect

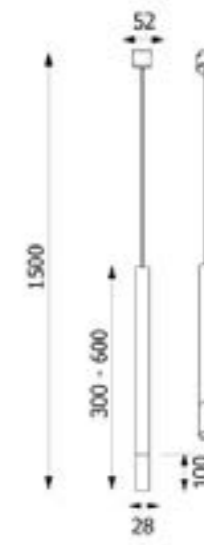


CE IP20

Subway LED Black Pendant Light



Finish	White
Wattage	6W
Voltage	230V
Light Source	6W Citizen COB LED inuilt
CCT	2700K
Lumen	600 lm
Beam angle	24°
Dimmable	Yes
Driver	Integral Triac LED driver inbuilt
Material	Aluminium

Dimensions	
Diameter:	50mm
Height:	270mm
Ceiling plate:	Ø70 x H28mm
Cut out:	77 x 77mm



The Subway 6W LED white pendant light. With a clear front as standard but additional white cover available. Integral Triac LED driver inbuilt. ROHS compliant & CE certified. Also available in White

CE  IP65


Subway LED White Pendant Light



Finish	White
Wattage	6W
Voltage	230V
Light Source	6W Citizen COB LED inbuilt
CCT	2700K
Lumen	600 lm
Beam angle	24°
Dimmable	Yes
Driver	Integral Triac LED driver inbuilt
Material	Aluminium

Dimensions	
Diameter:	50mm
Height:	270mm
Ceiling plate:	Ø70 x H28mm
Cut out:	77x77mm

The Subway 6W LED white pendant light. With a clear front as standard but additional white cover available. Integral Triac LED driver inbuilt. ROHS compliant & CE certified. Also available in Black

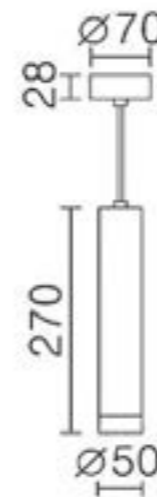

CE  IP20

Zoom Hanging Pendant Black

Suspension lamp with a modern and captivating design from the Zoom collection, tubular shape. Ideal for lighting environments such as the kitchen or living room. Light bulb not included.

Finish	Matt Black
Lamp	1 x GU10
Material	Aluminium

Dimensions

Height	300mm
Diameter	56mm
Max Drop	1500mm



Rotunda 12W Black LED Pendant Light, 40cm

The Rotunda 12W black LED pendant light, 40cm, producing two sources of lighting, direct downward lighting and indirect upward lighting. This pendant is also available in a larger 55cm 18W version.

Lamp	12W 3000K LED inbuilt.
Materials	Aluminium & Iron

Dimensions

Diameter	400mm
Height	1000mm






Rotunda 18W Black LED Pendant Light, 55cm

The Rotunda 18W black LED pendant light, 55cm, producing two sources of lighting, direct downward lighting and indirect upward lighting. This pendant is also available in a smaller 40cm 12W version.

Lamp	18W 3000K LED inbuilt.
Materials	Aluminium & Iron

Dimensions

Diameter	550mm
Height	1000mm



Prism 36W Black LED Pendant Light

The Prism 36W black LED pendant light c/w driver

Lamp 36Watt 5,110 lumen LED inbuilt

Materials Metal

Dimensions

Length 872mm

Width 583

Total drop 5000mm



Antiqua Black/Gold Suspension

Lamp 1 x LED E27 15W

Material Iron

Finish Textured Black

IP Rating IP20


Dimensions

Total Drop 2400mm

Shade Ø 350mm

Shade height 175mm

Ceiling plate Ø 80mm

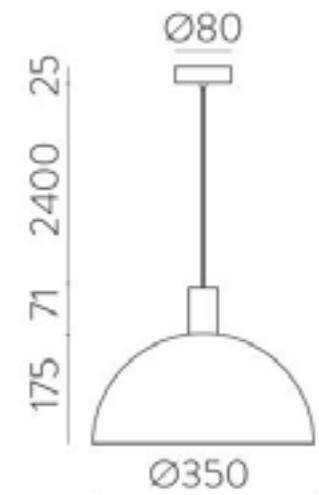


Mardi Antique Gold Pendant



Lamp	8 x LED G9
Material	Iron/Glass
Finish	Antique Gold/Opal
IP Rating	IP20

Dimensions	
Max Drop	1150mm
Fitting height	332mm
Fitting length	950mm
Fitting width	690mm
Globe Ø	120mm

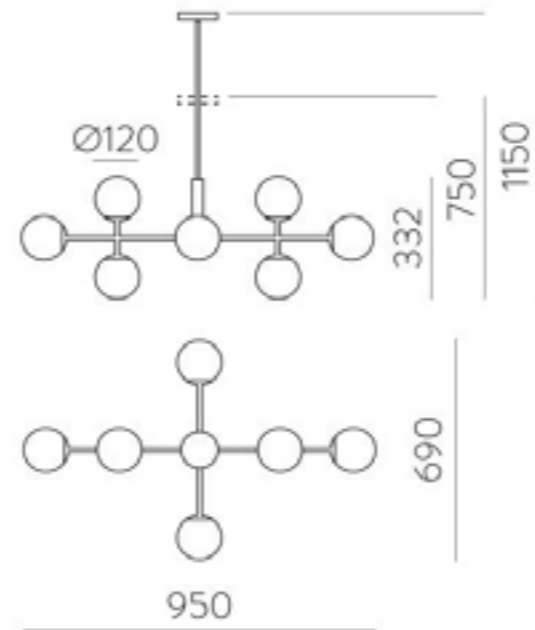


CE  IP20

Mardi Large Antique Gold Pendant



Lamp	20 x LED G9 7W
Material	Iron/Glass
Finish	Antique Gold/Opal
IP Rating	IP20


Dimensions	
Max Drop	5000mm
Fitting height	572mm
Fitting length	1554mm
Fitting width	780mm
Globe Ø	120mm
Ceiling plate Ø	100mm

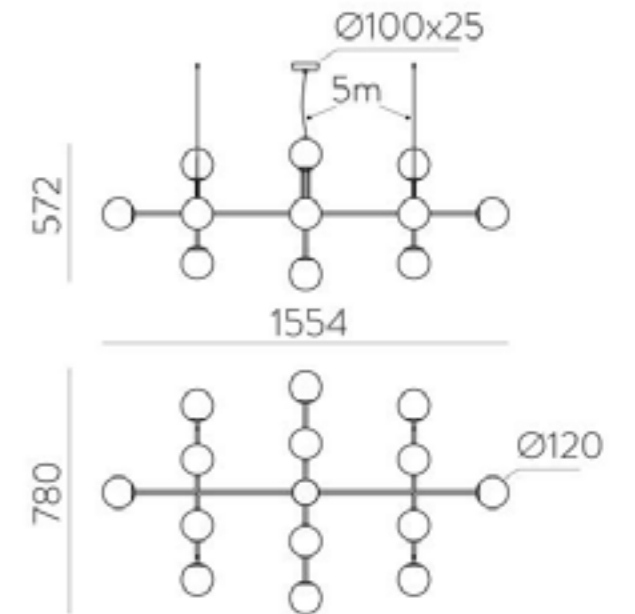

CE  IP20


Mardi Antique Black Floor Lamp

Mardi Antique Gold Floor Lamp

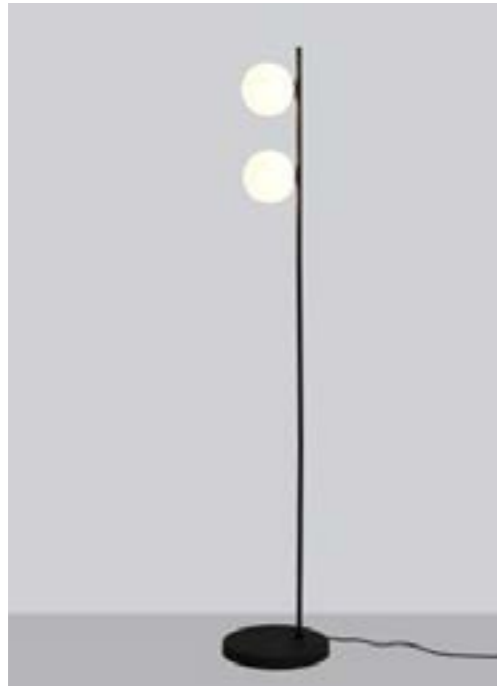



Lamp	2 x 7W LED G9
Material	Iron/Glass
Finish	Textured black/Opal
IP Rating	IP20

Dimensions	
Height	1400mm
Globe Ø	120mm
Base Ø	250mm

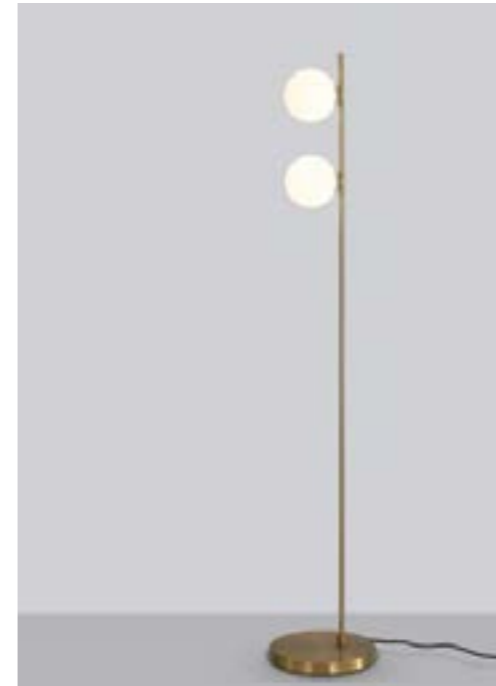

Lamp	2 x 7W LED G9
Material	Iron/Glass
Finish	Antique Gold/Opal
IP Rating	IP20

Dimensions	
Height	1400mm
Globe Ø	120mm
Base Ø	250mm

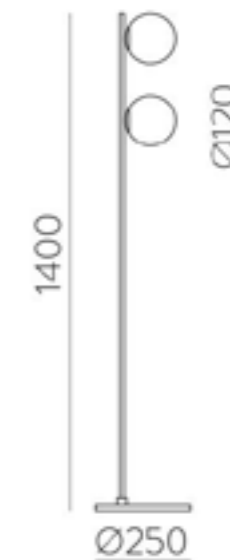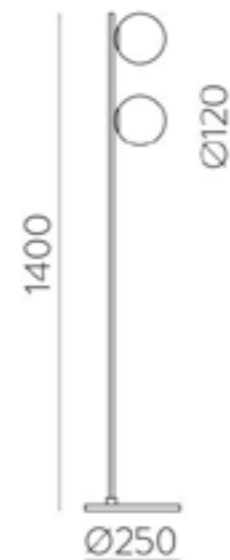

CE □ IP20


CE □ IP20

Mardi Antique Gold Table Lamp



Lamp	2 x 7W LED G9
Material	Iron/Glass
Finish	Antique Gold/Opal
IP Rating	IP20

Dimensions	
Height	450mm
Globe Ø	120mm
Base Ø	150mm

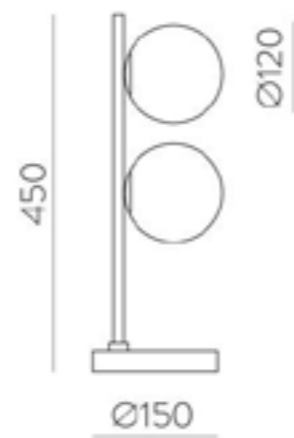

CE □ IP20


Stiletto Black Wall Light



The Stiletto wall light in black, producing two sources of LED lighting. One source from the 15W E27 bulb and the other from the 3W LED arm.

Lamp	1 x E27 15W + 1 x LED 3W
Kelvin	3000K
Lumen	285Lm
Material	Metal/Cotton
Finish	Textured Black
IP Rating	IP20

Dimensions	
Backplate Ø	160mm
Backplate projection	30mm
LED arm Ø	20mm
LED arm length	81mm

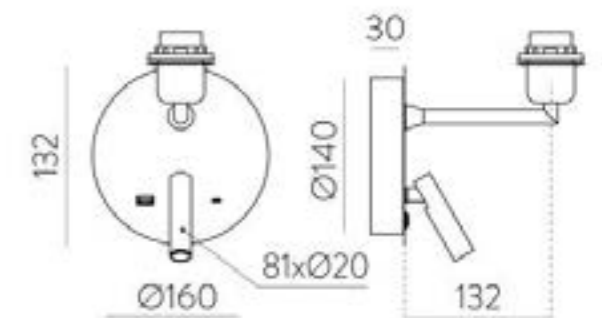

CE □ IP20


Stiletto 15W Black Pendant Light

Stiletto 15W Black Table Lamp




Lamp	1 x E27 15W
Material	Metal/cotton
Finish	Textured Black
IP Rating	IP20

Dimensions	
Total drop	2500mm
Shade Ø	420mm
Shade height	240mm
Ceiling plate Ø	120mm

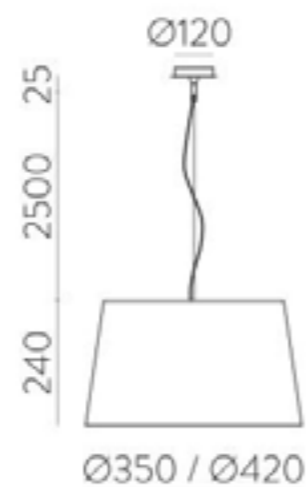

Lamp	1 x E27 15W
Material	Metal/cotton
Finish	Textured Black
IP Rating	IP20

Dimensions	
Height	590mm
Shade height	240mm
Shade Ø	420mm
Base Ø	300mm

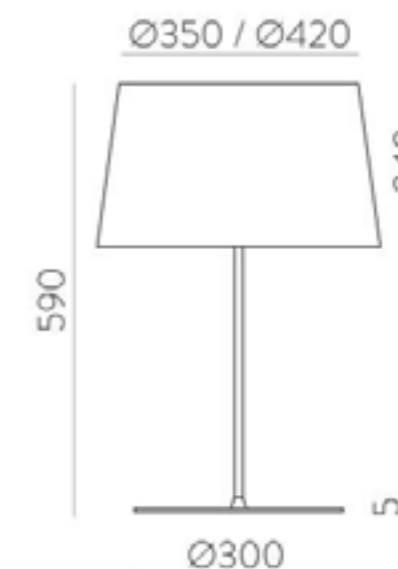


Lyra Antracite Path Light



Lamp	1 x LED E27 15W
Material	Aluminium/Glass
Finish	Textured Anthracite
IP Rating	IP65

Dimensions	
Height	380mm
Width	120mm
Fitting Ø	151mm

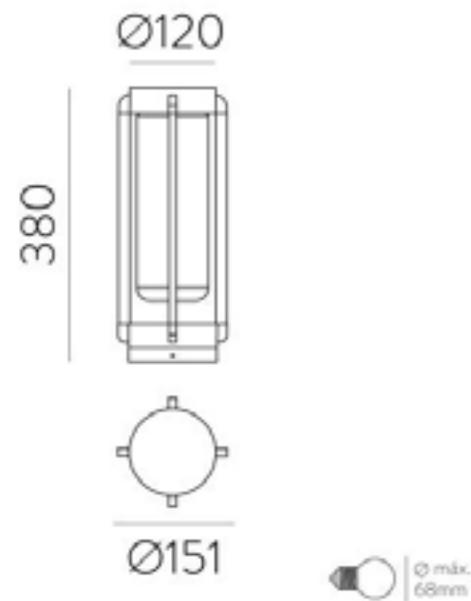


CE  IP65

Lyra Antracite Wall Light



Lamp	1 x LED E27 15W
Material	Aluminium/Glass
Finish	Textured Anthracite
IP Rating	IP65

Dimensions	
Height	408mm
Projection	218mm
Width	120mm
Fitting Ø	151mm

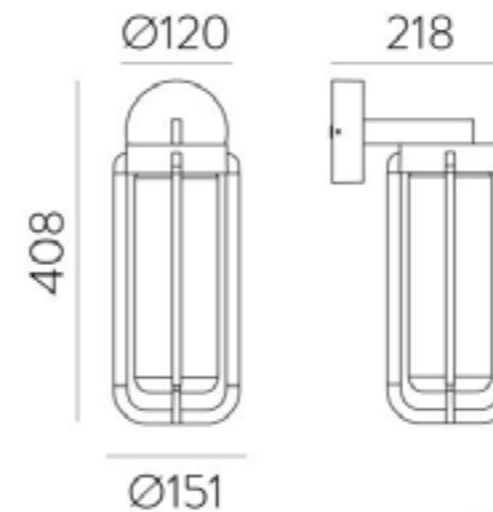

CE  IP65


Ruble Nickle Wall Light

The Ruble wall light in nickle, produces two sources of LED lighting. One source of direct lighting coming from the LED adjustable arm and another source coming from beneath the backplate, allowing a soft glow of light to surround it. The backplate also includes a USB + USBC port.



Lamp	1 x LED 12W + 1 x LED 3W
Material	Aluminium/Iron/PMMA
Finish	Matt Nickel
Kelvin	3000K
Lumen	12W: 970Lm x 3W: 285Lm
IP Rating	IP20

Dimensions	
Height	190mm
Width	140mm
Projection	31.5mm
Max Projection	145mm
Backplate dimensions	152mm x 102mm

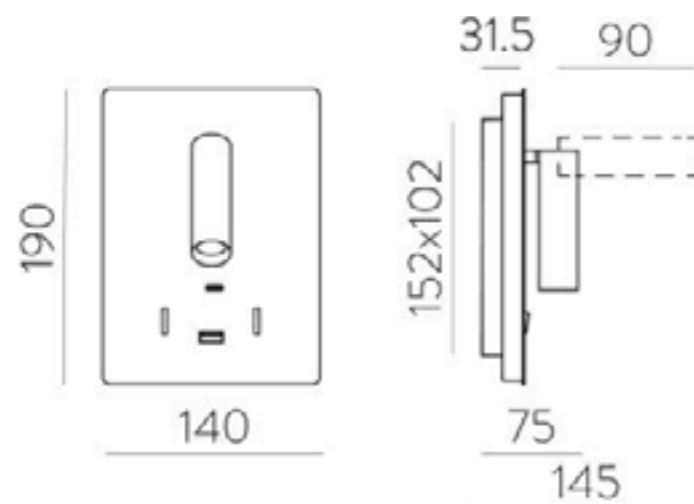

CE IP20


Ruble Black Wall Light

The Ruble wall light in black, produces two sources of LED lighting. One source of direct lighting coming from the LED adjustable arm and another source coming from beneath the backplate, allowing a soft glow of light to surround it. The backplate also includes a USB + USBC port.



Lamp	1 x LED 12W + 1 x LED 3W
Material	Aluminium/Iron/PMMA
Finish	Textured Black
Kelvin	3000K
Lumen	12W: 970Lm x 3W: 285Lm
IP Rating	IP20

Dimensions	
Height	190mm
Width	140mm
Projection	31.5mm
Max Projection	145mm
Backplate dimensions	152mm x 102mm

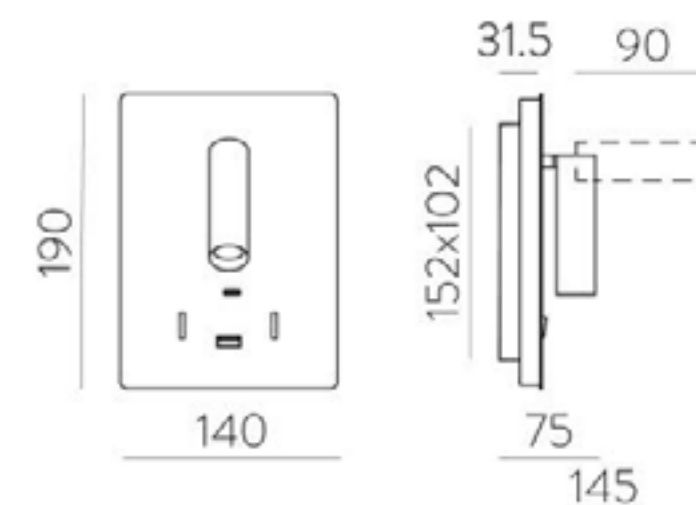


CE IP20

Valen Black Wall Light



Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Black/Opal
IP Rating	IP44
Dimensions	
Globe Ø	150mm
Projection	170mm
Backplate Ø	120mm

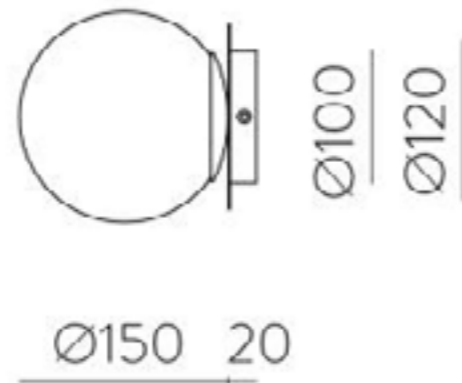


CE  IP44

Valen Antique Gold Wall Light



Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Antique Gold/Opal
IP Rating	IP44
Dimensions	
Globe Ø	150mm
Projection	170mm
Backplate Ø	120mm

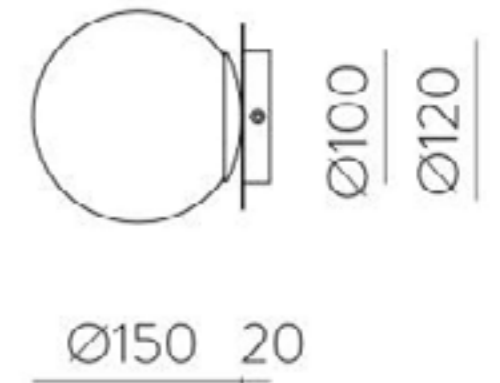

CE  IP44


Valen Antique Gold Wall Light

Valen Antique Black Wall Light




Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Antique Gold/Opal
IP Rating	IP44

Dimensions	
Height	280mm
Globe Ø	150mm
Projection	186mm
Backplate Ø	140mm

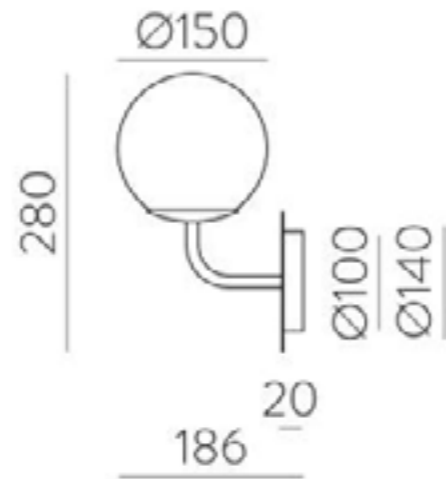

Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Black/Opal
IP Rating	IP44

Dimensions	
Height	280mm
Globe Ø	150mm
Projection	186mm
Backplate Ø	140mm

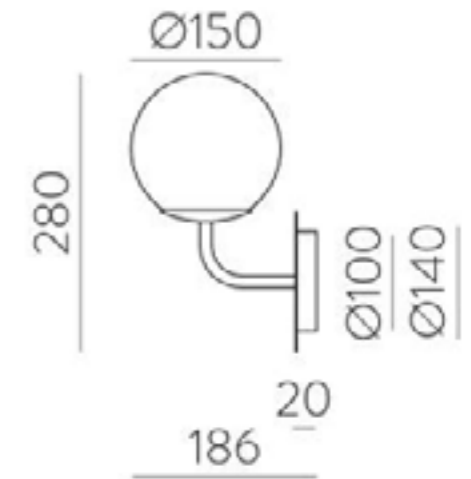

Valen 18cm Antique Gold Pendant



Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Antique Gold/Opal
IP Rating	IP44

Dimensions	
Total Drop	2850mm
Globe Ø	180mm
Ceiling plate Ø	100mm




 Ømax. 45mm
 max.145

CE  IP44

Valen 18cm Black Pendant



Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Black/Opal
IP Rating	IP44

Dimensions	
Total Drop	2850mm
Globe Ø	180mm
Ceiling plate Ø	100mm




 Ømax. 45mm
 max.145

CE  IP44

Valen 30cm Antique Gold Pendant

Valen 30cm Matt Black Pendant




Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Antique Gold/Opal
IP Rating	IP44

Dimensions	
Total Drop	2970mm
Globe Ø	300mm
Ceiling plate Ø	100mm



Lamp	1 x E27 15W
Material	Aluminium/Glass/Steel
Finish	Matt Black/Opal
IP Rating	IP44

Dimensions	
Total Drop	2970mm
Globe Ø	300mm
Ceiling plate Ø	100mm

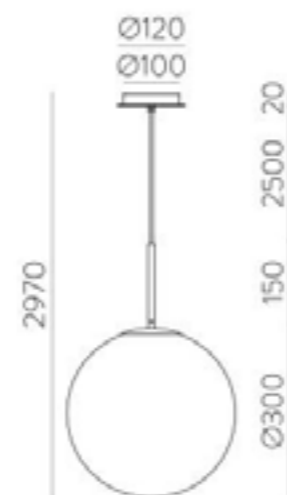


 Ømax. 65mm
 max.245




 Ømax. 65mm
 max.245


CE □ IP44

CE □ IP44

Anza Nickle Recessed Wall Light



Lamp	1 x LED 3W
Material	Aluminium/Iron
Finish	Matt Nickle
Kelvin	3000K
Lumen	315Lm
IP Rating	IP20
Dimensions	
Backplate Ø	90mm
Projection	95mm
Lamp length	110mm
Lamp opening Ø	30mm

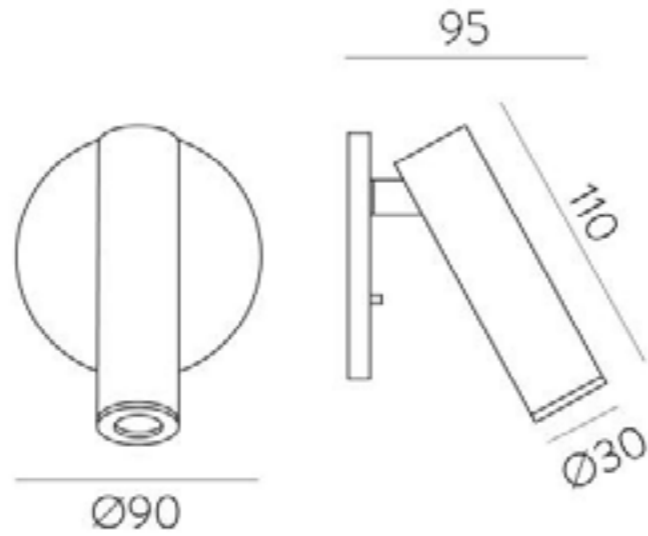


CE  IP20

Anza Bronze Wall Light



Lamp	1 x LED 3W
Material	Aluminium/Iron
Finish	Bronze
Kelvin	3000K
Lumen	315Lm
IP Rating	IP20
Dimensions	
Backplate Ø	90mm
Min Projection	85mm
Lamp opening Ø	30mm

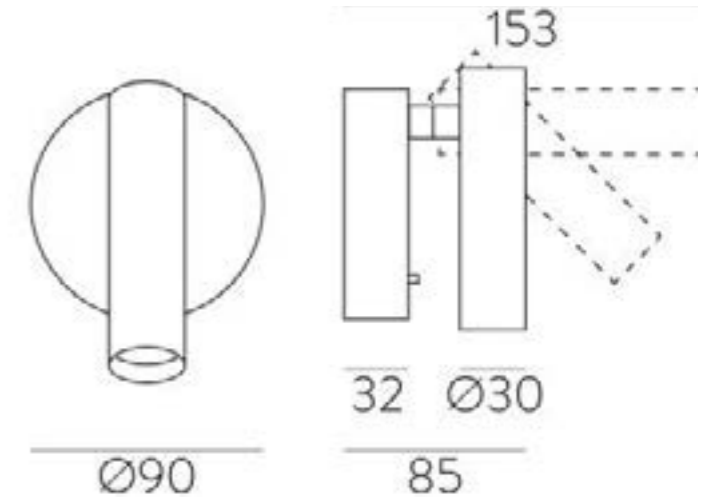


CE  IP20

Anza Black Wall Light



Lamp	1 x LED 3W
Material	Aluminium/Iron
Finish	Textured Black
Kelvin	3000K
Lumen	315Lm
IP Rating	IP20
Dimensions	
Backplate Ø	90mm
Min Projection	85mm
Lamp opening Ø	30mm

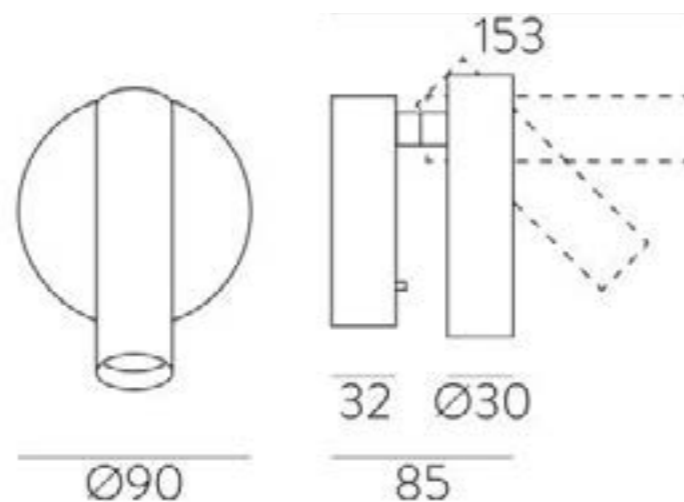


CE IP20

La Vida Antique Gold Wall Light



Lamp	1 x LED 12W
Material	Aluminium/Iron/PMMA
Finish	Matt Antique Gold
Kelvin	3000K
Lumen	620Lm
IP Rating	IP44
Dimensions	
Height	300mm
Projection	115mm
Width	165mm

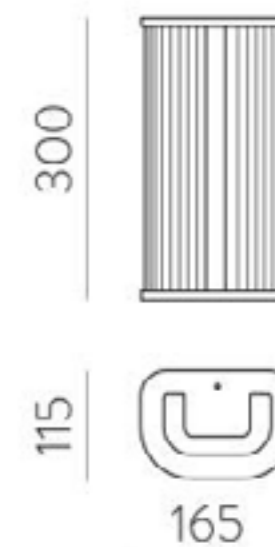

CE IP44



Moon Base Gold LED Wall Light with Black Marble



Available with black marble, green marble, white marble, orange ceramic, pink metal and gold metal.



Lamp Inbuilt 7.5W LED

Material Aluminium

Finish Gold

IP Rating IP54

CCT 3000K

Dimensions

Diameter 150mm

Projection 100mm



CE  IP54

Moon Base Gold LED Wall Light with Gold Metal

Available with black marble, green marble, white marble, orange ceramic, pink metal and gold metal.

Lamp	Inbuilt 7.5W LED
Material	Aluminium
Finish	Gold
IP Rating	IP54
CCT	3000K

Dimensions

Diameter	150mm
Projection	100mm



CE  IP54

Moon Base Gold LED Wall Light with Green Marble



Available with black marble, green marble, white marble, orange ceramic, pink metal and gold metal.

Lamp	Inbuilt 7.5W LED
Material	Aluminium
Finish	Gold
IP Rating	IP54
CCT	3000K

Dimensions	
Diameter	150mm
Projection	100mm




Moon Base Gold LED Wall Light with Orange Ceramic

Available with black marble, green marble, white marble, orange ceramic, pink metal and gold metal.

Lamp	Inbuilt 7.5W LED
Material	Aluminium
Finish	Gold
IP Rating	IP54
CCT	3000K

Dimensions

Diameter	150mm
Projection	100mm

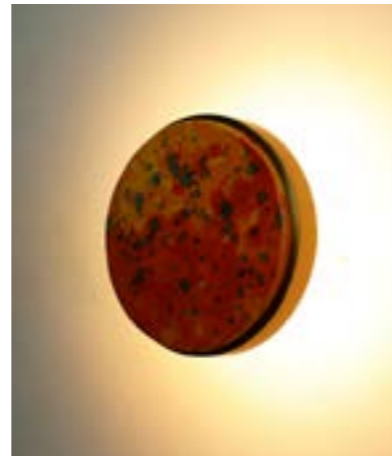

CE  IP54



Moon Base Gold LED Wall Light with Pink Metal



Available with black marble, green marble, white marble, orange ceramic, pink metal and gold metal.

Lamp	Inbuilt 7.5W LED
Material	Aluminium
Finish	Gold
IP Rating	IP54
CCT	3000K

Dimensions	
Diameter	150mm
Projection	100mm

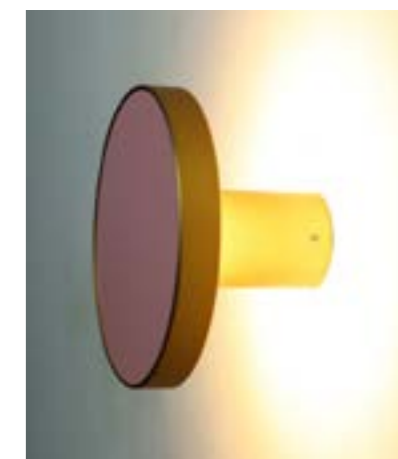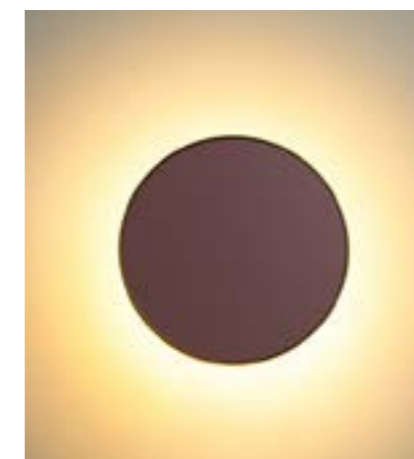

Moon Base Gold LED Wall Light with White Marble

Available with black marble, green marble, white marble, orange ceramic, pink metal and gold metal.

Lamp	Inbuilt 7.5W LED
Material	Aluminium
Finish	Gold
IP Rating	IP54
CCT	3000K

Dimensions

Diameter	150mm
Projection	100mm



CE  IP54

Sive Brass Adjustable Spotlight

The Sive adjustable wall lamp has an arm that rotates the primary light fixture to any position and a simple wall mounting. It can be installed in almost any outdoor or bathroom setting.



Finish	Brass
Lamp	1 x GU10
Material	Metal
Max Wattage	35W

Dimensions

Length	110mm
Diameter	55mm
Backplate ø	70mm



CE □ IP54

Sive Double Wall Light

The Sive Double Wall Light is mainly designed for outdoor use, illuminating any surface with its bi-directional light.

Lamp	2 x GU10
Finish	Brass

Dimensions	
Height	200mm
Diameter	60mm
Projection	100mm
Backplate width	50mm



Big Bang Brass XL Wall Light

The Big Bang brass XL wall light mixing elements of both satin and polished brass discs.

Finish	Brass
--------	-------

Lamp	16 x G9 3W 2700K dimmable LED bulbs
------	-------------------------------------

Material	Metal
----------	-------

Dimensions	
------------	--

Length	1930mm
--------	--------

Height	800mm
--------	-------

Projection	100mm
------------	-------





Tikku 27W Black LED 3 Light Suspension

The Tikku 27W black LED 3 light suspension with fully adjustable arms & heads. Perfect accent lighting. Matching 1 light suspension & wall light also available. Complete with driver.



Lamp 3x 9W 3000K LED inbuilt.


Total consumption: 27W

Material Metal

Dimensions

Standard Length: 1340mm x Width: 1530mm.

Standard total height: 640mm.



Tikku 9W Black LED Single Suspension

The Tikku 9W Black LED single suspension with an adjustable arm & head. Perfect accent lighting. Matching 3 light suspension & wall light also available. Complete with driver.

Lamp	1 x 9W 3000K LED inbuilt.
Material	Metal

Dimensions

Standard Width	150mm.
Standard total height	1800mm.




Tikku 9W Black LED Wall Light

The Tikku 9W Black LED wall light with an adjustable arm & head. Perfect accent lighting. Matching 1 & 3 light suspensions also available. Complete with driver.

Lamp	1 x 9W 3000K LED inbuilt.
Material	Metal

Dimensions

Standard Projection: 1180mm x Width: 143mm.
Standard total height: 400mm.1800mm.

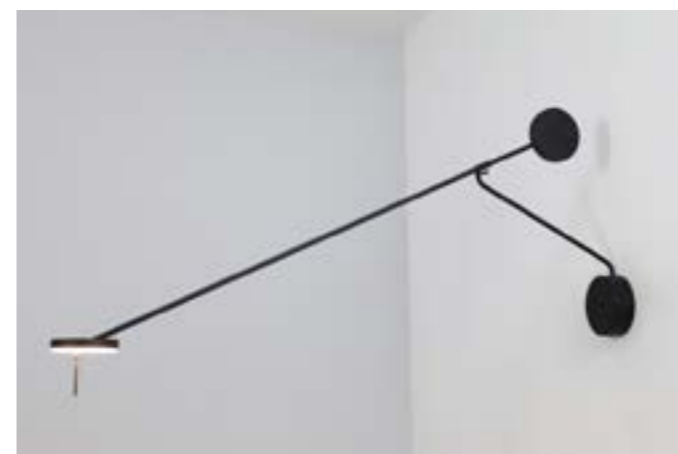

Pipes Black Suspension



Lamp	Inbuilt 8W
Material	Metal
Kelvin	3000K
Dimmable	Yes
Dimensions	
Total drop	1100mm
Height	500mm
Diameter	30mm
Ceiling plate dimensions	L110mm X W75mm






Pipes White Suspension



Lamp	Inbuilt 8W
Material	Metal
Dimmable	Yes
Kelvin	3000K

Dimensions	
Total drop	1100mm
Height	500mm
Diameter	30mm
Ceilingplate dimensions	L110mm x W75mm





Quad 41W Burnished Bronze LED Pendant Light

The Quad 41W burnished bronze LED pendant light. Driver included.

Finish	Brushed Bronze
Lamp	41W 3000K LED inbuilt
Material	Metal

Dimensions

Small pendant:

Length	900mm.
Width	635mm.
Total standard drop	700mm.





Skyline 6000mm Wall to Wall LED 3000K [Black]



Links two points together as an outright line, achieve free cross-space application.

Multiple applications, such as direct, indirect lighting & wall washing lighting etc.

Featured in a maximum usage length of 6m.

Extremely convenient and flexible for application.

Model No	NL_HCSKYLINE_6000MM
Length	6000mm
Lumens	1000LM/m
CRI	>90
CCT	3000K
Profile colour	Black
Voltage	24V DC
Wattage	10W/m
Cutting unit	29.4mm
Lighting method	Direct lighting





Skyline 12000mm Wall to Wall LED 3000K [Black]





Links two points together as an outright line, achieve free cross-space application

Multiple applications, such as direct, indirect lighting & wall washing lighting etc.

Featured in a maximum usage length of 12m


Extremely convenient and flexible for applications having sufficient end wall grounds. 24VDC LED drivers to be located remote within 5 metres

Length	12000mm
Lumens	890LM/m
CRI	>90
CCT	3000K
Profile colour	Black
Voltage	24V DC
Wattage	8.7W/m
Cutting unit	50mm
Lighting method	Indirect lighting

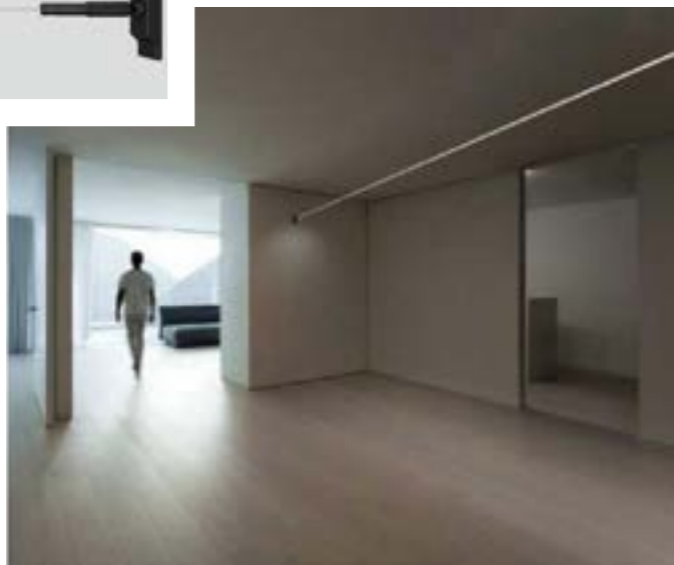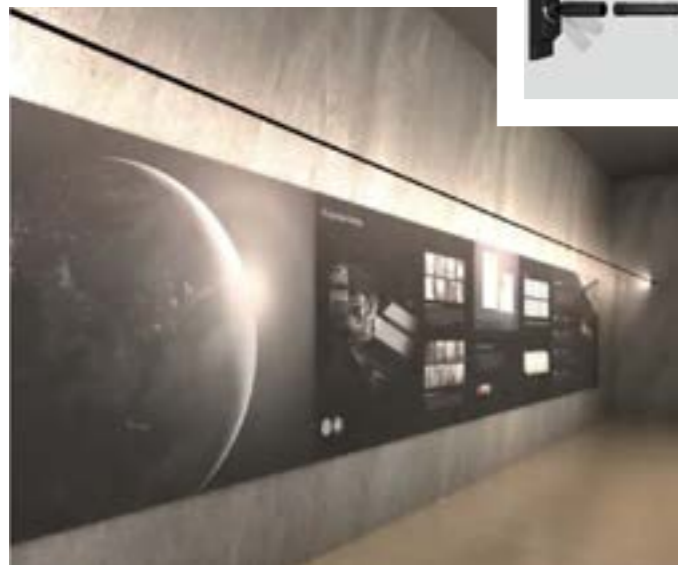

Orbital Outward Lighting 1.5m diameter

Orbital Inward Lighting 1.5m diameter

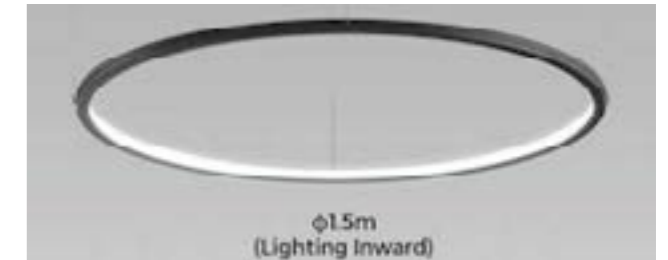

Φ 1.5M, circular luminaires of outward lighting

High quality surface treatment in black

Adopt silicone flexible diffuser, producing uniform and soft light

Two-in-one pendant cable, beautiful overall effect

Two installation ways: pendant and surface mounted

Model No NL_HC_ORBITAL_OUT

Size 1500 x 35mm

Diffuser material Silicone

Lumens 2870LM

Wattage 105W

CCT 4000K

CRI >80/>95

Beam angle 120°

Lighting direction Outward

Input voltage 240V

Power factor >0.9

Electric Grade Class II

Driver Included

Dimming No dimming

Colour Black

Φ 1.5M, circular luminaires of inward lighting

High quality surface treatment in black

Adopt silicone flexible diffuser, producing uniform and soft light

Two-in-one pendant cable, beautiful overall effect

Two installation ways: pendant and surface mounted

Model No NL_HC_ORBITAL_IN

Size 1500 x 35mm

Diffuser material Silicone

Lumens 2200LM

Wattage 105W

CCT 4000K

CRI >80/>95

Beam angle 120°

Lighting direction Inward

Input voltage 240V



Power factor >0.9

Electric Grade Class II


Driver Included

Dimming No dimming

Colour Black

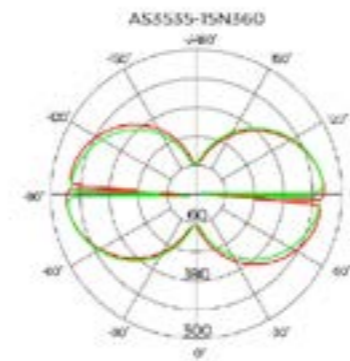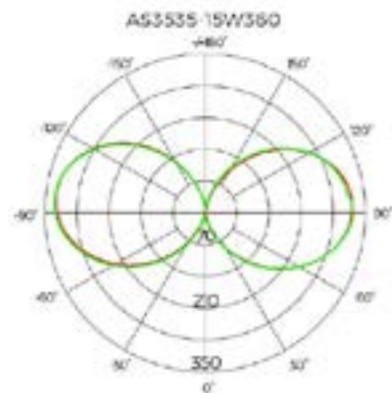

Orbital Downward Lighting 1.5m diameter

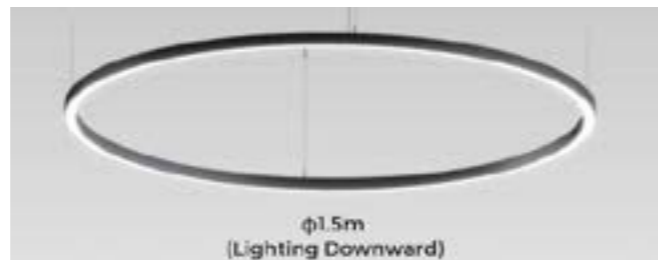



Φ 1.5M, circular luminaires of downward lighting

High quality surface treatment in black

Adopt silicone flexible diffuser, producing uniform and soft light

Two-in-one pendant cable, beautiful overall effect

Two installation ways: pendant and surface mounted

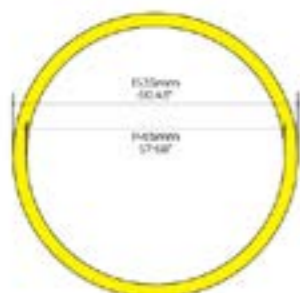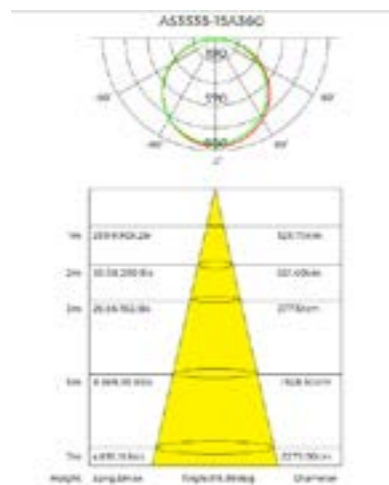

Model No	NL_HC_ORBITAL_DWN
Size	1500 x 35mm
Diffuser material	Silicone
Lumens	2850LM
Wattage	90W
CCT	4000K
CRI	>80/>95
Beam angle	120 °
Lighting direction	Downward
Input voltage	240V
Power factor	<0.9
Electric Grade	Class II
Driver	Included
Dimming	No dimming
Colour	Black

NET LED Pendant




The NET hanging LED pendant with a specular reflector which achieves a low anti-glare UGR rating of <19. No UV/IR light

3CCT switchable between 3000K, 4000K or 5700K

A downlighting fixture that suits several settings - hotel, home, office, shop etc. Also widely used for public areas such as stairways, lobby, reception, corridors etc.

Long lifetime of 50,000 hours

Finish	Black
Wattage	25W
Voltage	AC200-240VAC
Light Source	LED SMD
CCT	3CCT Switch selectable [3000K/4000K/5700K]
CRI	≥80
Lumens	2250-2650
Beam width	60 °
LED Driver	Built in to ceiling plate
Dimmable	Yes [Triac Dimmable]
Material	Aluminium

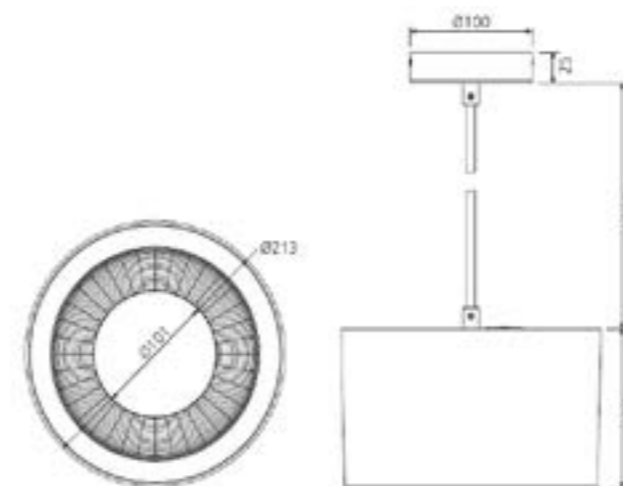

3-CCT in 1 Lamp
Slide switch for color





Crest LED Ceiling Light c/w Sensor



Finish	White
Lamp	LED SMD
Material	PC
Max Wattage	25W
Kelvin	3000K
IP Rating	IP65
IK Rating	IK06
Lumen output	2450-2670lm
Dimmable	Yes
Dimensions	
Diameter	300mm
Projection	70mm

CE  IP65

Urban Downlighter



Finish	Black or White
Lamp	COB
Material	PC
Max Wattage	8W
Kelvin	2700K
IP Rating	IP20
Lumen output	800-1000lm
Beam angle	30°
Dimmable	Yes

Dimensions	
Width	95mm
Length	95mm
Height	125mm

CE  IP20

Donut Surface Ceiling Fitting



The Donut has a hollow shape which brings vitality into an ordinary lamp body and offers an appealing 3D effect


The Donut breaks from other traditional flush mounted ceiling lights with its modern arc luminous surface

The fitting can bring a subtle touch of elegance in a cost effective way to commercial projects and public areas. Also ideal for use in homes, hotels, restaurants, & cafes

Installation is made easier with a rotating buckle mechanism



Finish	Black
Wattage	18W
Voltage	AC220-240VAC
Light Source	2835 SMD LED in built
CCT	3000K
CRI	≥80
Lumens	1450
Beam width	120 °
LED Driver	Built in
Dimmable	No
Material	Aluminium

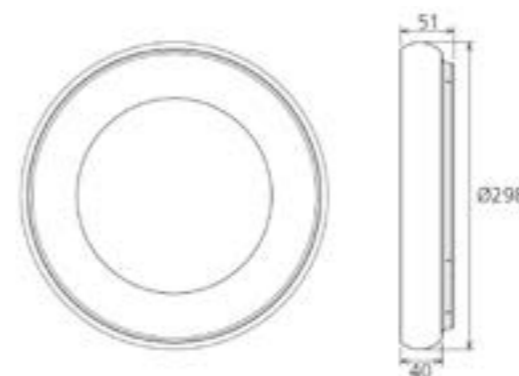

CE  IP40



Halos 18W 3000K LED IP44 Satin Nickel Ceiling Light

The Halos 18W 3000K LED IP44 satin nickel ceiling light. With a low UGR rating of <19 signifying the lowered level of any eye discomfort from glaring



Lamp	18W 3000K 1890lm LED inbuilt
Material	Metal + double layer glass

Dimensions	
Diameter	260mm
Height	85mm



CE □ IP44



Halo 20W LED Drum Surface Ceiling Spotlight [White]



The Halo 20W LED white surface ceiling spotlight, available in either 3000K or 4000K to suit various atmospheric settings

Wired to integral HEP driver

ROHS compliant & CE certified



Units in mm

Finish	White
Wattage	20W
Voltage	230V AC
Light Source	Osram 2835SMD 20W dual temperature LED inbuilt
CCT	3000K / 4000K with selectable switch on rear
Lumens	2500 lm
Beam width	90°
LED Driver	Built in
Dimmable	No
Material	Plastic

CE □ IP20

Slice 3CCT LED Ceiling Light



Finish	Black
Lamp	LED SMD
Material	PC
Max Wattage	15W
Kelvin	3000K, 4000K, 5700K
IP Rating	IP65
IK Rating	IK06
Lumen output	1100-1300lm
Beam angle	110°
Dimmable	No
Dimensions	
Diameter	251mm
Projection	116mm





Moon Surface Circular Panel [White]

The Moon Dali dimmable fixture for both hanging and surface mounting

With an integral Tridonic DALI dimmable driver

Flush opal diffuser for direct lighting. 10% uplighting on the back and 90% downlighting to the front

3CCT adjustable with slide switch, prior to installation

Lamp	LED SMD
Material	Aluminium/PC
Max Wattage	60W
Dimmable	Dali
Finish	White RAL 9016
Voltage	AC200-240VAC
CCT	3CCT - [3000K/4000K/5700K]
CRI	≥80
Lumens	5700- 6660
Beam width	120 °
LED Driver	Built in



Moon Surface Circular Panel [Black]


The Moon Dali dimmable fixture for both hanging and surface mounting

With an integral Tridonic DALI dimmable driver

Flush opal diffuser for direct lighting. 10% uplighting on the back and 90% downlighting to the front

3CCT adjustable with slide switch, prior to installation

Lamp	LED SMD
Material	Aluminium/PC
Max Wattage	60W
Dimmable	Dali
Finish	Black RAL 9005
Voltage	AC200-240VAC
CCT	3CCT - [3000K/4000K/5700K]
CRI	≥80
Lumens	5700- 6660
Beam width	120 °
LED Driver	Built in





Moon Suspended Circular Panel [White]

The Moon Dali dimmable fixture for both hanging and surface mounting
 With an integral Tridonic DALI dimmable driver
 Flush opal diffuser for direct lighting. 10% uplighting on the back and 90% downlighting to the front
 3CCT adjustable with slide switch, prior to installation
 Multiple installations – Option to suspend with extra harness suspension cables
 Includes wire suspension kit



Lamp	LED SMD
Material	Aluminium/PC
Max Wattage	60W
Dimmable	Dali
Finish	White RAL 9016
Voltage	AC200-240VAC
CCT	3CCT – [3000K/4000K/5700K]
CRI	≥80
Lumens	5700- 6660
Beam width	120 °
LED Driver	Built in



With wire harness suspension




Moon Suspended Circular Panel [Black]


The Moon Dali dimmable fixture for both hanging and surface mounting
 With an integral Tridonic DALI dimmable driver
 Flush opal diffuser for direct lighting. 10% uplighting on the back and 90% downlighting to the front
 3CCT adjustable with slide switch, prior to installation
 Multiple installations – Option to suspend with extra harness suspension cables
 Includes wire suspension kit



Lamp	LED SMD
Material	Aluminium/PC
Max Wattage	60W
Dimmable	Dali
Finish	Black RAL 9005
Voltage	AC200-240VAC
CCT	3CCT – [3000K/4000K/5700K]
CRI	≥80
Lumens	5700- 6660
Beam width	120 °
LED Driver	Built in

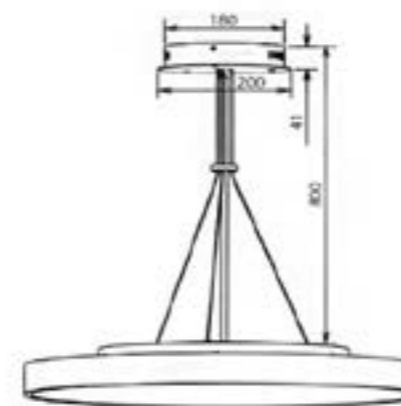

With wire harness suspension





Stern Wall light [White]



The Stern wall light has an IP54 rating allowing for interior and exterior use.


It's 2x5W integral SMD LED giving a uniform dissipation of light both up and down direction

The ADC12 housing material provides excellent thermal management along with the 94-V0 fire rated PC diffuser

Internal flicker free driver

Designed for indoor and outdoor lighting applications such as hotels, parks, and corridors and courtyards


Finish	White
Wattage	10W
Voltage	AC220-240VAC
Light Source	LED SMB
CCT	3000K
CRI	≥ 80
Lumens	400-500
Beam width	90°
LED Driver	Built in
Dimmable	No
Material	Aluminium/PC

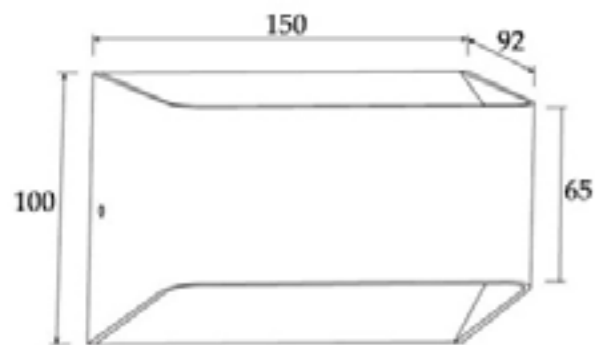

Units: mm



Stern Wall light [Black]

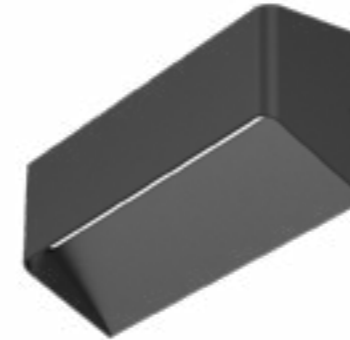

The Stern wall light has an IP54 rating allowing for interior and exterior use


It's 2x5W integral SMD LED giving a uniform dissipation of light both up and down direction

The ADC12 housing material provides excellent thermal management along with the 94-V0 fire rated PC diffuser

Internal flicker free driver

Designed for indoor and outdoor lighting applications such as hotels, parks, and corridors and courtyards

Finish	Black
Wattage	10W
Voltage	AC220-240VAC
Light Source	LED SMB
CCT	3000K
CRI	≥ 80
Lumens	400-500
Beam width	90°
LED Driver	Built in
Dimmable	No
Material	Aluminium/PC

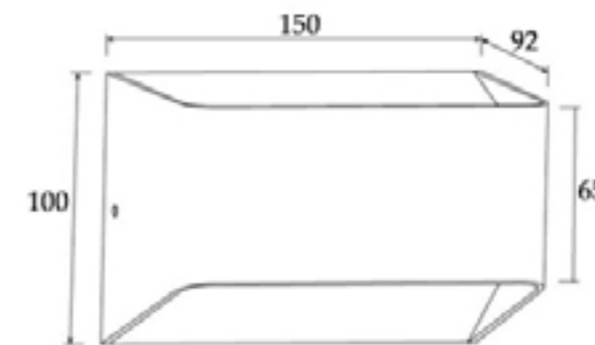

Units: mm





Breeze 3CCT LED Wall Light



Finish	Black or White
Lamp	SMD LED
Material	Aluminium
Max Wattage	10W
Kelvin	3000K, 4000K, 5700K
IP Rating	IP65
Lumen output	600-750lm
Beam angle	90°x115°x40°

Dimensions	
Length	200mm
Height	60mm
Projection	100mm



CE  IP65

Leaf 3CCT LED 8W Wall Light



Finish	White
Lamp	SMD LED
Material	PC + Aluminium
Max Wattage	8W
Kelvin	3000K + 4000K + 5700K
IP Rating	IP20
IK Rating	IK06
Lumen output	660-720lm
Beam angle	160°
Dimmable	Yes
Dimensions	
Width	145mm
Height	135mm
Projection	80mm





Rhombus 3CCT LED Wall Light



Finish	Black or White
Lamp	COB
Material	PC + Glass
Max Wattage	2 x 3W
Kelvin	3000K, 4000K, 5700K
IP Rating	IP64
IK Rating	IK05
Lumen output	290-460lm
Beam angle	120°
Dimmable	No

Dimensions	
Length	200mm
Max Width	100mm
Max Projection	80mm



CE  IP64

Drum Wall & Ceiling Light [White]



The Drum bulkhead with an IP65 rating for indoor & outdoor use


3CCT switchable between 3000K, 4000K and 5700K

Designed for general lighting applications while also widely used in public areas such as stairways, lobbies, receptions and corridors

Long lifetime of 50,000 hours

Wired to integral non-dimmable driver

Finish	White
Wattage	18W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3CCT Switch selectable 3000K/4000K/5700K
CRI	≥80
Lumens	1500-1850
Beam width	110 °
LED Driver	In built
Dimmable	No
Material	Aluminium/PC

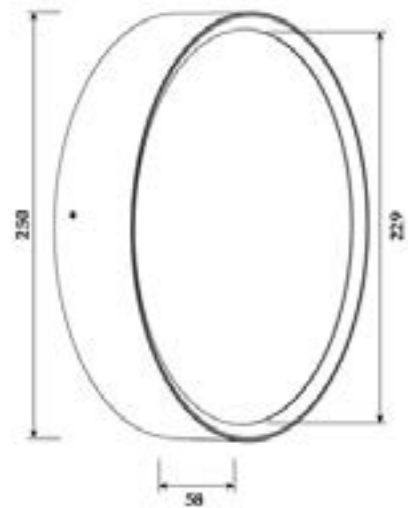

Units in mm



Drum Wall & Ceiling Light [Black]



The Drum bulkhead with an IP65 rating for indoor & outdoor use


3CCT switchable between 3000K, 4000K and 5700K

Designed for general lighting applications while also widely used in public areas such as stairways, lobbies, receptions and corridors

Long lifetime of 50,000 hours

Wired to integral non-dimmable driver

Finish	White
Wattage	18W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3CCT Switch selectable 3000K/4000K/5700K
CRI	≥80
Lumens	1500-1850
Beam width	110 °
LED Driver	In built
Dimmable	No
Material	Aluminium/PC

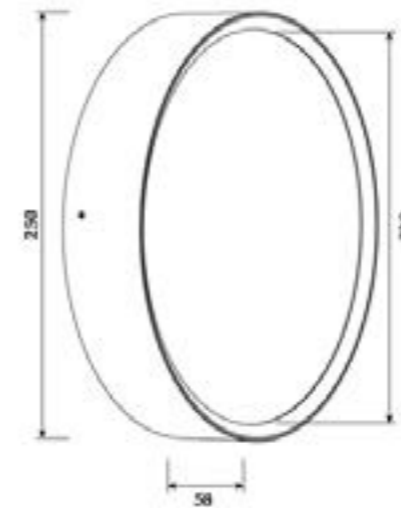

Units in mm






Coin 3CCT 8W LED Wall Light

Finish	Black or White
Lamp	SMD LED
Material	PC + Aluminium
Max Wattage	8W
Kelvin	3000K + 4000K + 5700K
IP Rating	IP65
IK Rating	IK06
Lumen output	500-620lm
Beam angle	90
Dimmable	Yes




Dimensions	
Diameter	160mm
Projection	50mm

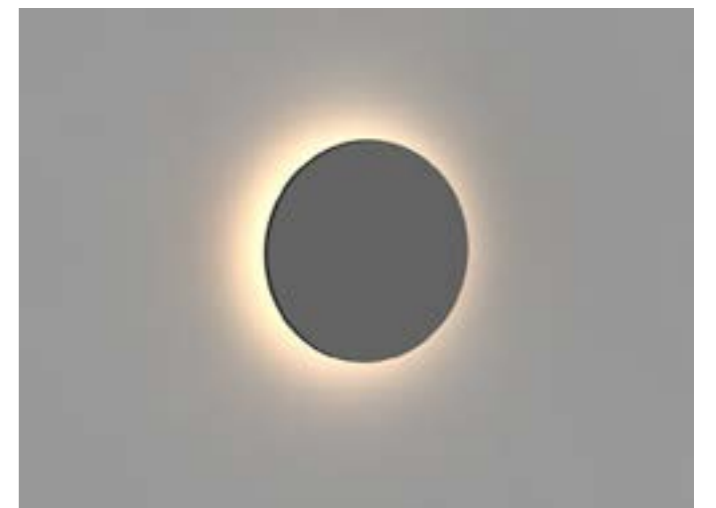

CE  IP65

Coin 3CCT 15W LED Wall Light

Finish	Black
Lamp	SMD LED
Material	PC + Aluminium
Max Wattage	15W
Kelvin	3000K + 4000K + 5700K
IP Rating	IP65
IK Rating	IK06
Lumen output	1000-1220lm
Beam angle	90°
Dimmable	Yes
Dimensions	
Diameter	250mm
Projection	50mm

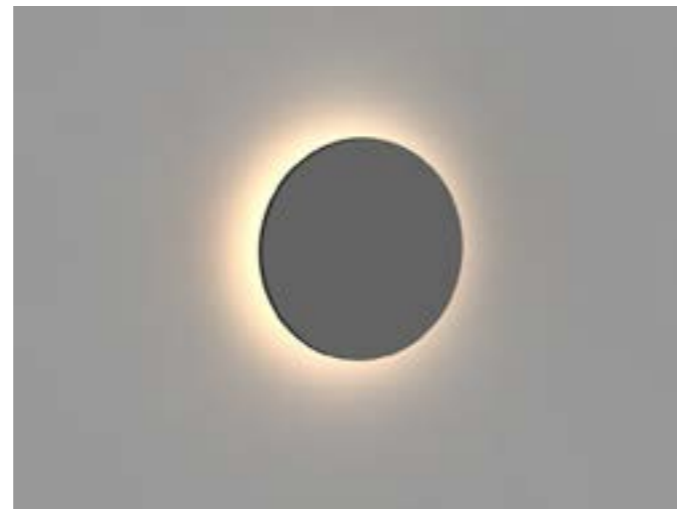



Coin 3CCT 8W LED Wall Light



Finish	White
Lamp	SMD LED
Material	PC + Aluminium
Max Wattage	8W
Kelvin	3000K + 4000K + 5700K
IP Rating	IP65
IK Rating	IK06
Lumen output	500-620lm
Dimmable	Yes

Dimensions	
Diameter	160mm
Projection	50mm



CE □ IP65



Coin 3CCT 15W LED Wall Light



Finish	White
Lamp	SMD LED
Material	PC + Aluminium
Max Wattage	15W
Kelvin	3000K + 4000K + 5700K
IP Rating	IP65
IK Rating	IK06
Lumen output	1000-1220lm
Dimmable	Yes

Dimensions	
Diameter	250mm
Projection	50mm



CE □ IP65

Crevasse Black Recessed LED Guide Light



The Crevasse 1.2W black recessed LED guide light, 3000K c/w integral HEP driver. Also available in silver or white

Extra option of housing required for concrete block application


Finish	Black
Wattage	1.2W
Voltage	230V
Light Source	1.2W Osram LED inbuilt
CCT	3000K
Lumen	146 lm
Beam angle	80°
Dimmable	No
Driver	Integral HEP driver
Material	Metal

Dimensions	
Length:	110mm
Height:	90mm
Projection from wall:	20mm
Cut out:	77x77mm


Housing for concrete installation



Material: Steel

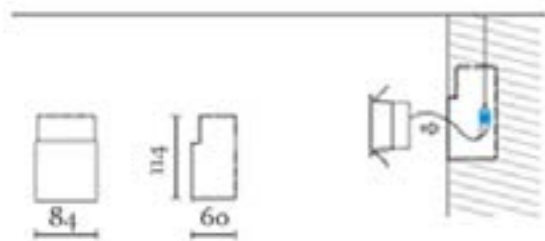

Units in mm

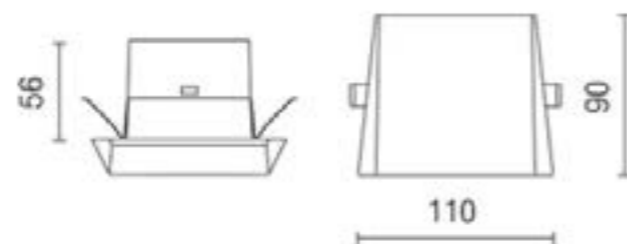

CE IP54

Crevasse Silver Recessed LED Guide Light



The Crevasse 1.2W silver recessed LED guide light, 3000K c/w integral HEP driver. Also available in white or black.

Extra option of housing required for concrete block application.


Finish	Silver
Wattage	1.2W
Voltage	230V
Light Source	1.2W Osram LED inbuilt
CCT	3000K
Lumen	146 lm
Beam angle	80°
Dimmable	No
Driver	Integral HEP driver
Material	Metal

Dimensions	
Length:	110mm
Height:	90mm
Projection from wall:	20mm.
Cut out:	77x77mm


Housing for concrete installation



Material: Steel

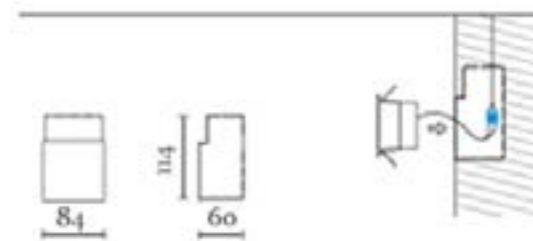

Units in mm

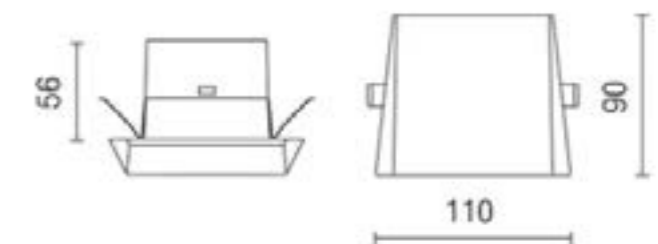

CE IP54

Crevasse White Recessed LED Guide Light



The Crevasse 1.2W white recessed LED guide light, 3000K c/w integral HEP driver. Also available in silver or black

Extra option of housing required for concrete block application


Finish	White
Wattage	1.2W
Voltage	230V
Light Source	1.2W Osram LED inbuilt
CCT	3000K
Lumen	146 lm
Beam angle	80°
Dimmable	No
Driver	Integral HEP driver
Material	Metal

Dimensions	
Length:	110mm
Height:	90mm
Projection from wall:	20mm
Cut out:	77x77mm


Housing for concrete installation



Material: Steel

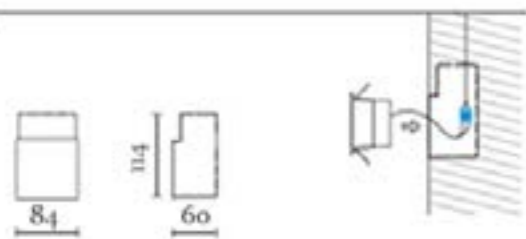

Units in mm

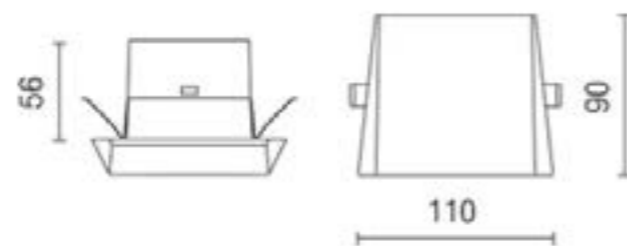

CE IP54

Hood Wall Light




Finish	White
Lamp	SMD LED
Material	Aluminium
Max Wattage	3W
Kelvin	2700K
IP Rating	IP20
IK Rating	IK06
Lumen output	164-172lm
Beam angle	60°

Dimensions	
Diameter	135mm
Projection	26mm



CE IP20

Slot Recessed Wall light

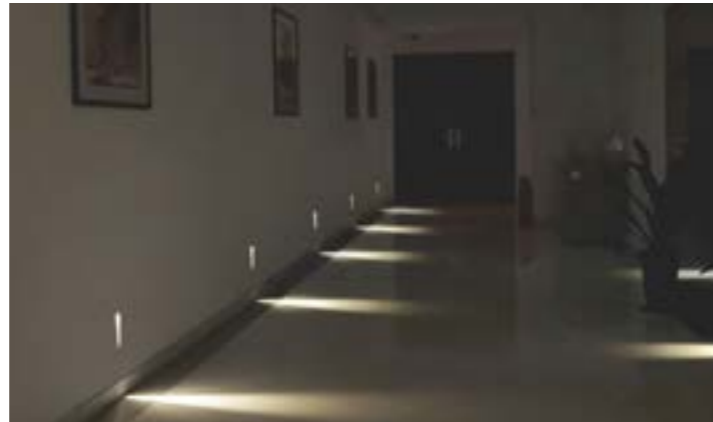

Eco-friendly LED technology with energy saving and low maintenance cost

The Slot Recessed wall light provide ultra-thin and clean line shape light for lighting designer

Luminaire designed with good glaring control and comfortable light output.

Good thermal management guarantees long lifespan


Easy install with two springs on up and down

The Slot is an excellent design for decorative light and guide-light, good for hall, corridor, residential and commercial applications

Finish	White
Wattage	3W
AC Input	240V
Light Source	OSRAM RACE LED
CCT	3000K
Lumens	180lm
Material	Aluminium

Optional Accessory

For concrete fitting

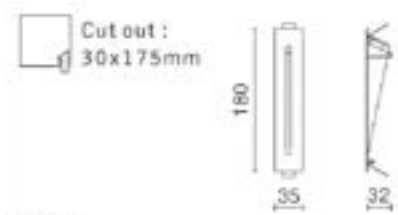


180lm

Units in mm



Units in mm



Tear 1.2W White Recessed LED Wall Light




The Tear 1.2W white recessed LED wall light c/w integral HEP driver. Without housing.

Lamp	1x Osram 1.2W LED inbuilt
Finish	White

Dimensions

Height	152mm
Width	57mm
Recessed depth	49mm
Cut out	35mm x 108mm

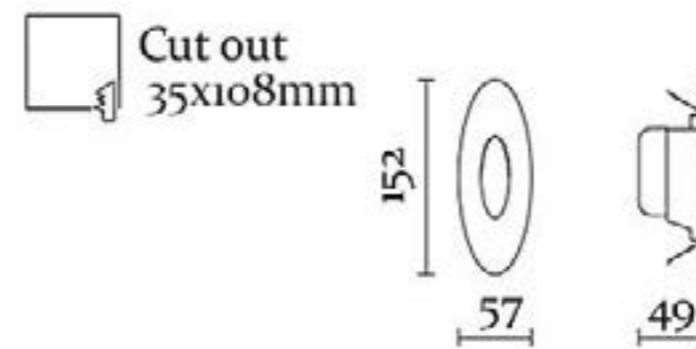

Chevy 5W Wall Light



This is a compact wall light with wall mount installation. Combines with line design to provide a low-glare and indirect lighting appearance. IP65 Waterproof suitable for outdoor and indoor use. IK08 has a high level of protection thanks to its aluminium and anti-UV housing.

Lamp	LED SMD 2835
Material	Aluminium
Finish	Black or White
Max Wattage	5W
Kelvin	3000K
Lumen	150-200Lm
Beam angle	60°
IP Rating	IP65

Dimensions	
Diameter	114mm
Projection	40mm




CE  IP65

Harrier 1x3W 3000K Step light 24V DC [Brown]



The Harrier 3W brown Recessed LED wall light, 24V DC, ROHS compliant & CE Certified

Finish	RAL 8019 Brown
Wattage	1 x 3W
Voltage	24VDC
Light Source	1x 3W Osram LED
CCT	3000K
Lumens	50 Lumens
Beam width	80°
LED Driver	Not included
LED colour	3000K
Dimmable	Yes
Material	Aluminum

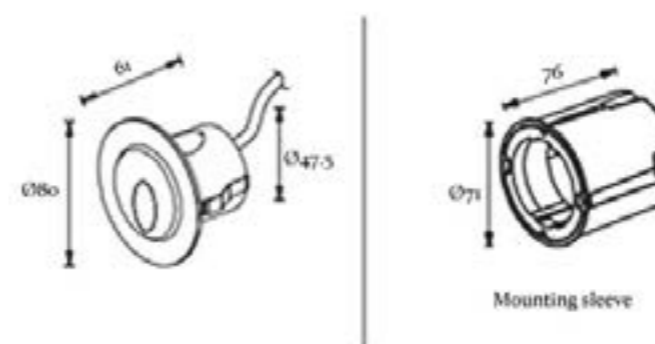

Cut out size:50mm
Units in mm


CE  IP65

Bastion 2000K Step light [Stainless Steel]



The Bastion 10x0.2W steel recessed LED wall light with a diffused glass front. In a hard chrome plated steel aluminium with 8mm tempered glass. ROHS compliant & CE certified.

Finish	Stainless Steel aluminium Diffused glass
Wattage	10 x 0.2W
Voltage	240V
Light Source	10 x 0.2W SMD 3030 LED built in Actual consumption 2.7W
CCT	2000K
Lumens	51 Lumens
Beam width	120°
LED Driver	Built in
LED colour	Extra warm light
Dimmable	Yes
Material	Aluminum

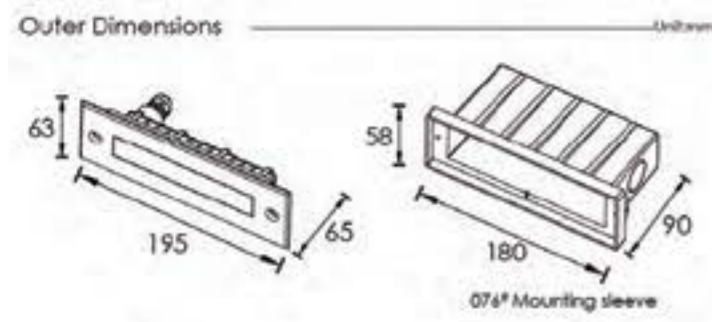

Units in mm


CE IP65

Bastion 3000K Step light [Stainless Steel]



The Bastion 10x0.2W steel recessed LED wall light with a diffused glass front. In a hard chrome plated steel aluminium with 8mm tempered glass. 24VDC, ROHS compliant & CE certified.

Finish	Stainless Steel aluminium Diffused glass
Wattage	10 x 0.2W
Voltage	240V
Light Source	10 x 0.2W SMD 3030 LED built in Actual consumption 2.7W
CCT	3000K
Lumens	51 Lumens
Beam width	120°
LED Driver	Built in
LED colour	Warm white
Dimmable	Yes
Material	Aluminum

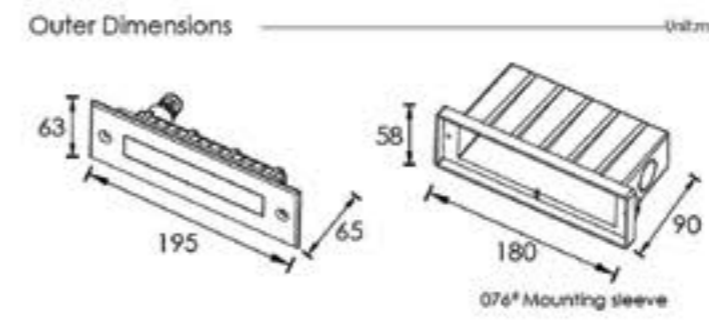

Units in mm

CE IP65

Impala 15W Wall Light

The Impala 15W wall light can be used as an up and downlighter. It uses SMD lighting, and the ADC12 aluminium profile provides excellent heat management. Its wide application range, which is appropriate for numerous indoor and outdoor lighting applications, is further increased by its IP65 high protection level.



Lamp	LED SMD 2835
Material	Aluminium
Finish	Black or White
Max Wattage	2 x 7.5W
Lumen	1550-1700Lm
Beam angle	45°
IP Rating	IP65

Dimensions	
Height	179mm
Projection	95mm
Width	70mm



Impala 8W Wall Light


The Impala 8W wall light can be used as an either up or downlighter. It uses SMD lighting, and the ADC12 aluminium profile provides excellent heat management. Its wide application range, which is appropriate for numerous indoor and outdoor lighting applications, is further increased by its IP65 high protection level.



Lamp	LED SMD 2835
Material	Aluminium
Finish	Black or White
Max Wattage	8W
Lumen	750-850Lm
Beam angle	45°
IP Rating	IP65

Dimensions	
Height	143mm
Projection	95mm
Width	70mm

Storm LED Exterior Bollard

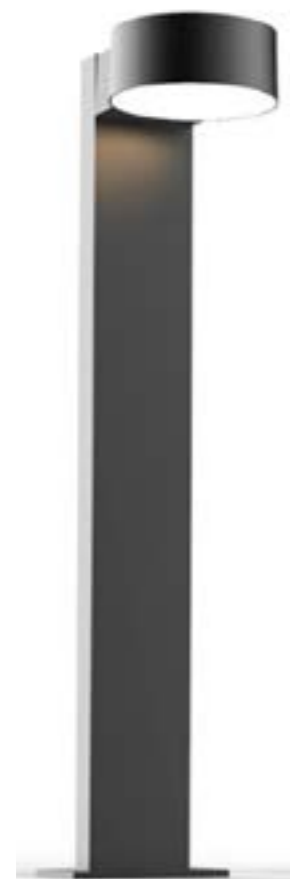


Finish	Black RAL 9005
Material	Aluminium
Lamp	LED SMD
Voltage	AC100-240V
Max Wattage	8W
Kelvin	3000K
CRI	<80
Beam Angle	120 °
IP Rating	IP65
IK Rating	IK10
Lumen output	600-655lm
Dimmable	No
Dimensions	
Height	700mm
Width	208mm
Lamp ø	140mm


CE  IP65

Brite 800mm Bollard



Lamp	LED SMD 3030
Material	Aluminium RAL9005 Black
Wattage	30 x 0.5W
CCT	3000K
Dimensions	
Height	895mm
Base Ø	150mm
Shade Ø	180mm

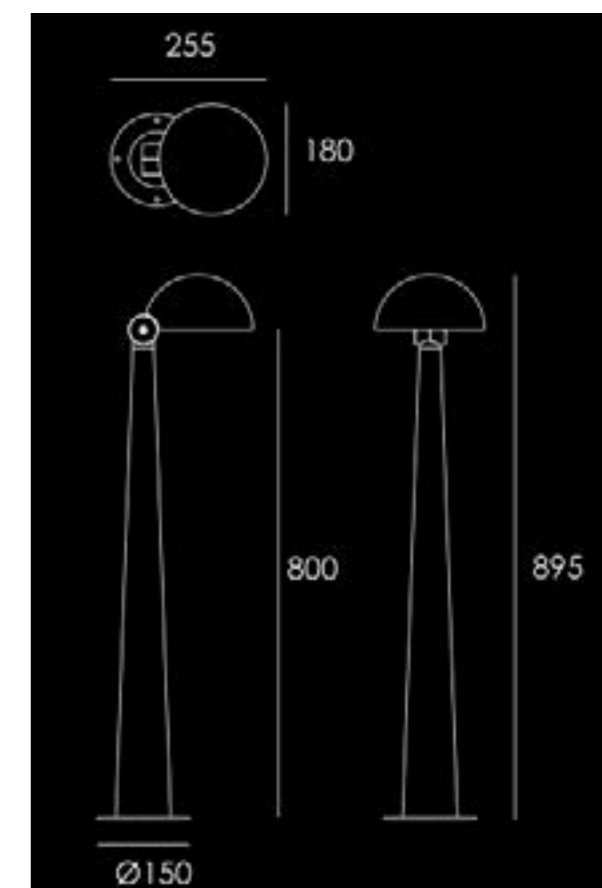

CE 

Solace 12W LED Bollard

Solace is a line of premium IP65 bollard lights with a timeless and modern style. The fixture has an extruded aluminium body, a die-casting head, and a PC optical concept. Its exquisite surface finish gives it a textured, upscale appearance. Owing to their flawless powder coating, our bollards are certified IP65 for extreme weather.

Applications include architectural buildings, commercial buildings, corporate buildings, parks and recreational areas and gardens.



Lamp	Inbuilt 12W LED
Finish	Black RAL9005
Material	Aluminium + PC
Dimmable	No
Lumen	608Lm
CCT	3000K
IP Rating	IP65
IK Rating	IK10
Beam angle	360°

Dimensions	
Total height	750mm
Diameter	100mm



CE □ IP65

Slat Exterior 60cm Bollard


The Slat Exterior Bollard dual emission, which emits light equally from both the front and back.




Lamp	LED SMD
Material	Aluminium + Polycarbonate
Colour	Dark Grey
Max Wattage	2 x 7W
Dimmable	No
Beam Angle	98°
Lumen output	2 x 510lm
CCT	3000K
Voltage	100-240V
IP Rating	IP54

Dimensions	
Width	100mm
Height	605mm
Depth	50mm

CE □ IP54

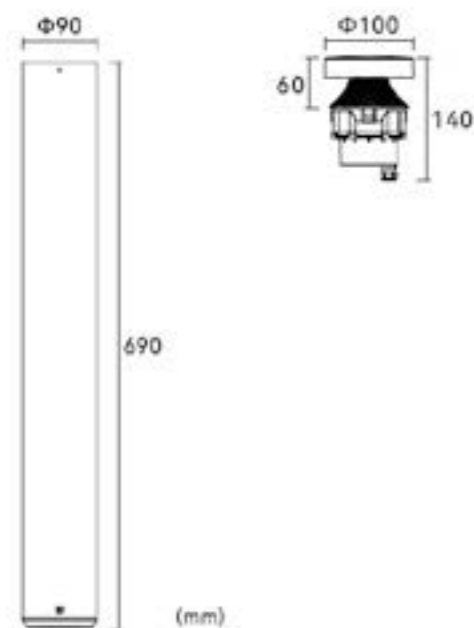

Aven Recessed Downlighter

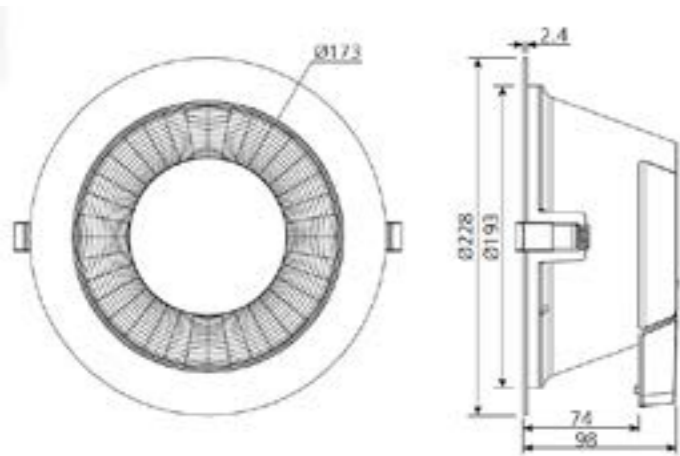

Lamp	SMD LED
Max Wattage	18W
Dimmable	No
IP Rating	IP54
Kelvin	4000K
Lumen	1780lm
Dimensions	
Diameter	228mm
Cutout	200-210mm
Depth	98mm



CE □ IP54

Niche Mini LED Spotlight



Finish	Black or White
Lamp	COB
Material	PC
Max Wattage	3W
Kelvin	3000K
IP Rating	IP40, IP54
Lumen output	150-170lm
Beam angle	30°
Dimmable	Yes
Dimensions	
Diameter	35mm
Depth	46mm
Cut out	30mm

CE □ IP40/54

Whirl 8W LED White Recessed Downlight with Opal Cover

The Whirl 8W LED white recessed downlight with opal cover. Wired to local HEP driver.




Lamp	Osram 8W 2835SMD LED inbuilt
------	------------------------------

Finish	White with opal cover
--------	-----------------------

Dimensions

Diameter	110mm
Depth	55mm
Cut out ø	90mm

Cut out :
Ø90

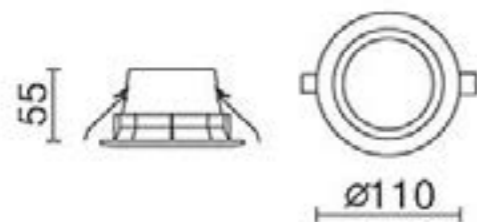

Cave GU10 Recessed Downlighter [Black]





The Cave GU10 Recessed Downlighter in black, also available in white has a very thin frame to create a high end effect for very clean ceiling design

Deep anti -dazzled front frame enhance better glaring control

Available to select different lamps as an accent lighting or general lighting depending on the project

Diameter: 106mm
Recess Depth required: 118mm
Cut out size 100mm

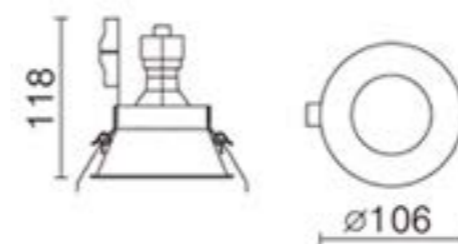

Units in mm

Finish	Black
Wattage	-
Voltage	230V
Light Source	1 x GU10 LED Bulb
CCT	-
CRI	-
Lumens	-
Beam width	-
Dimmable	Yes
Material	Housing Steel



Cave GU10 Recessed Downlighter [White]





The Cave GU10 Recessed Downlighter in white, also available in black has a very thin frame to create a high end effect for very clean ceiling design

Deep anti -dazzled front frame enhance better glaring control

Available to select different lamps as an accent lighting or general lighting depending on the project

Diameter: 106mm
Recess Depth required: 118mm
Cut out size 100mm

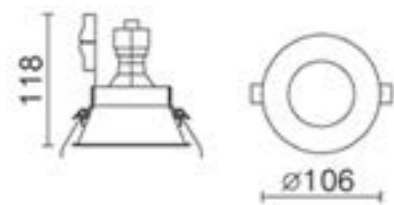

Units in mm

Finish	White
Wattage	-
Voltage	230V
Light Source	1 x GU10 LED Bulb
CCT	-
CRI	-
Lumens	-
Beam width	-
LED Driver	-
Dimmable	Yes
Material	Housing Steel

CE IP44

Cofire 6W LED Fire Rated 3CCT Deep Downlight, 30°



The Cofire 6W LED fire rated 3CCT deep downlight, 30° wired to integral Triac driver. The magnetic bezel on the front allows for easy interchangeable finish. 3CCT function behind the bezel gives the option of selecting 2700K, 3150K or 4000K colour tone. IP65 rated on the front. Sixty degree version also available here. CE certified.

Fire rated 30/60/90 minutes

Lamp	6W 2835SMD 3CCT dimmable LED inbuilt
Finish	White (option to add on black, brushed nickel or matt silver bezel)

Dimensions	
Diameter	85mm
Height	80mm
Recessed depth	75mm
Cut out ø	70mm

CE IP65



Cofire 6W LED Fire Rated 3CCT Fixed Downlight, 60°

The Cofire 6W LED fire rated 3CCT fixed downlight, 60° wired to integral Triac driver. The magnetic bezel on the front allows for easy interchangeable finish. 3CCT function behind the bezel gives the option of selecting 2700K, 3150K or 4000K colour tone. IP65 rated on the front. Thirty degree version also available here. CE certified.

Fire rated 30/60/90 minutes

Lamp	6W 2835SMD 3CCT dimmable LED inbuilt
------	--------------------------------------

Finish	White (option to add on black, brushed nickel or matt silver bezel)
--------	---

Dimensions

Diameter	85mm
Depth	60mm
Cut out ø	70mm



CE □ IP65



Cofire 6W LED Fire Rated 3CCT Recessed Downlight, Adjustable

The Cofire 6W LED Fire Rated 3CCT recessed downlight Adjustable wired to integral Triac driver. 3CCT function on the back of the housing gives the option of selecting 2700K, 3150K or 4000K colour tone (pre-installation only). IP54 rated on the front. Tilt adjustable by 25° each direction. Non-tiltable versions available.

Fire rated 30/60/90 minutes

Finish	White bezel only
--------	------------------

Wattage	6W
---------	----

CCT	2700K/3150K/4000K
-----	-------------------


Cut out	Ø80mm
---------	-------

Lamp source:	6W 2835SMD 3CCT dimmable LED COB inbuilt
--------------	--

Dimensions

Diameter	95mm
----------	------


Depth	82mm
-------	------

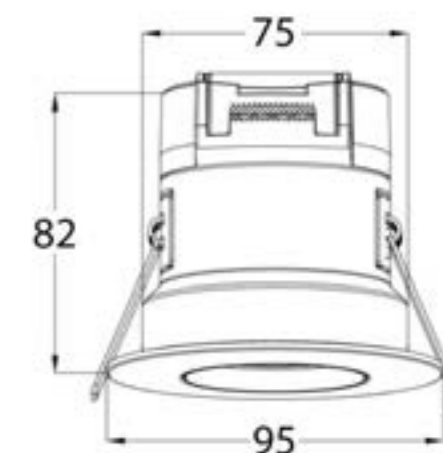

CE □ IP54

Comfort GU10 White Recessed Downlight

The Comfort GU10 white recessed downlight. Also available in black.

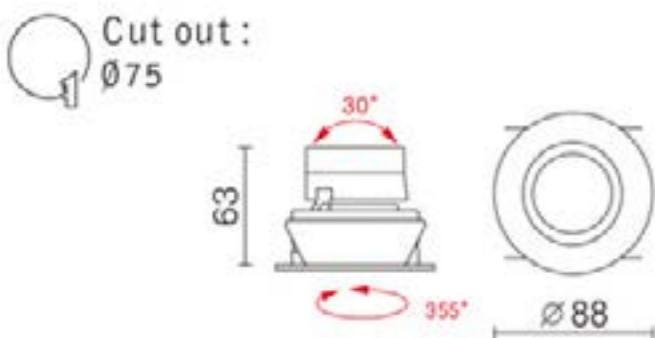

Finish	White
Lamp	1 x GU10 supplied separately
Material	Metal
Voltage	230V
Dimmable	Yes
IP rating	IP20

Dimensions	
Diameter	88mm
Depth	63mm (125mm depth required including GU10 lamp + holder).
Cut out	75mm

CE □ IP20


Osaka 17.5W LED Black IP65 Recessed Downlight 3000K

The Osaka 17.5W LED black IP65 recessed downlight 3000K wired to integral driver. CE certified. Suitable for downlighting exterior canopies



Lamp	17.5W Citizen cob LED inbuilt
Finish	Black

Dimensions	
Diameter	165mm
Depth	136mm
Cut out ø	150mm

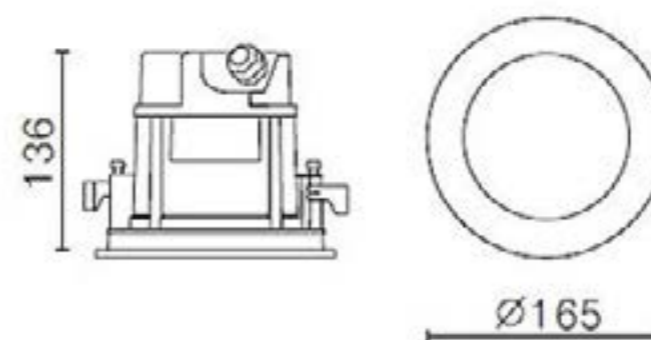

CE □ IP65




Cosmo 9W LED Recessed Ultra Thin Downlight, 4000K

The Cosmo 9W LED recessed ultra thin downlight, 4000K. Wired to local HEP driver



Lamp	Osram 36x0.2W 2835SMD LED inbuilt.
Finish	White
Dimensions	
Diameter	165mm
Recessed Depth	32mm
Projection	6mm
Cut out ø	150mm

Cut out :
Ø150

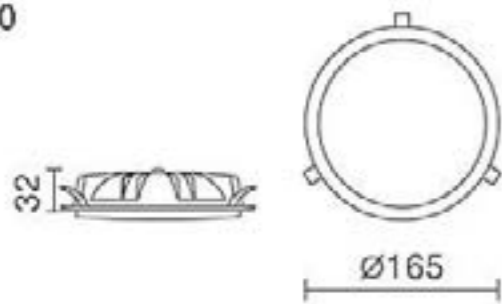

Canyon 2 Downlighter




The Canyon 2 recessed led downlighter has a white reflector with the light source recessed within the die cast housing

This provides a nice soft even diffused light effect without the inherent glare of a completely flush panel light

It is an ideal choice in a range of applications required to satisfy the minimum lux requirement of Part M of the Building Regulations

Ideal for use in public areas such as corridors, receptions, lobbies & stairwells

It also has an IP54 ingress protection rating making it an aesthetic option for toilet / WCs

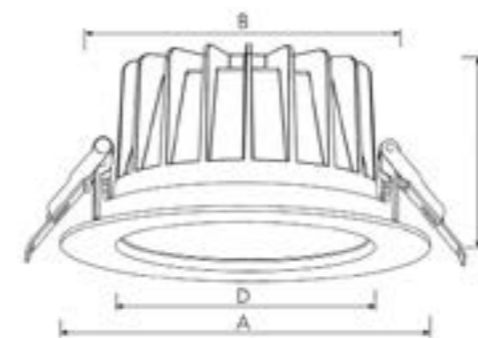

Product Dimensions

- A - 145mm
- B - 120mm
- C - 78mm
- D - 102mm

Cut out 130mm



Finish	White RAL 9016
Wattage	18W
Voltage	AC200-240VAC
Light Source	LED SMD
CCT	3CCT (3000K/4000K/5700K)
CRI	≥80
Lumens	1600-1950
Beam width	80 °
LED Driver	Remote
Dimmable	No
Material	Aluminium /PC



Cavern Recessed Downlighter [White]



The Cavern 34W LED white recessed downlighter wired to local tridonic driver


Photometric files available on request

Finish	White
Wattage	34W
Voltage	230V
Light Source	1x 34W Citizen COB LED inbuilt
Kelvin	3000K
Lumens	4200lm
Beam width	60°
Dimmable	No
Material	Housing Steel

Dimensions

Diameter: 165mm
 Depth: 126mm
 Cut out: 150mm

Cut out size
150mm

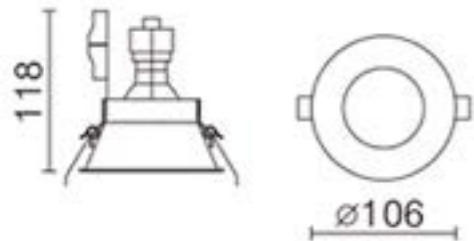

Units in mm

CE IP44

Compass Downlighter With PIR



The Compass is a miniature recessed downlighter which comes with an inbuilt PIR sensor located within the footprint of the diffuser

This PIR uses a fresnel which has a wide 120° detection angle. It has a 30 second delay time for switch off after last detection of movement


The Compass proves to be a simple energy saving solution for small back of house areas, eliminating the need for separate sensor & wiring labour

Perfect for use in public areas such as small corridors, lobbies & rest rooms

It also comes with an IP54 ingress protection rating



Finish	White RAL 9016
Wattage	10W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3000K
CRI	≥80
Lumens	830
Beam width	80°
LED Driver	Built in
Dimmable	No
Material	Aluminium coated plastic

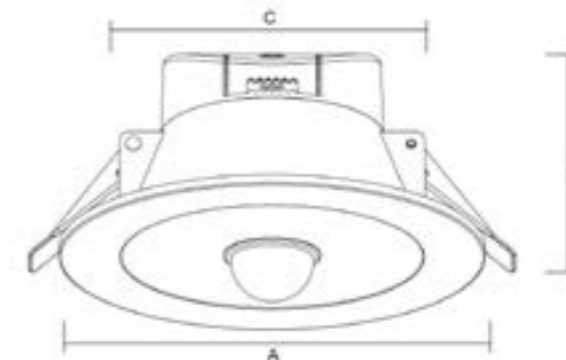

Product Dimensions

A - 115mm
 B - 73mm
 C - 87mm

Cutout - 90mmØ

Built in PIR Sensor CE IP54


Pivot Downlighter



The Pivot recessed gimbal type downlighter has an opal white diffuser which provides a uniform wide beam (110°) light effect

This along with 350° horizontal / 40° vertical adjustability make it the ideal solution for wall washing with an even distribution of light from minimal number of light fittings

In addition to above, the fitting is supplied with a high CRI value of 90 making it perfect for washing display units or full walls of merchandise in retail settings

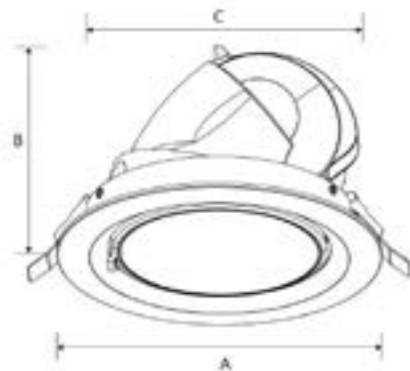

A - 180mm
B - 128mm
C - 160mm Cut out - 165mm Diameter



Finish	White
Wattage	33W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT options	3000K/4000K
CRI	90
Lumens	2520
Beam width	110°
LED Driver	Remote
Dimmable	No
Material	Aluminium

Napoli 2 Recessed Downlighter




The NAPOLI2 recessed downlighter with a deep set reflector, resulting in an anti-glare UGR rating of <19


3 correlated colour temperature -selectable prior to installation only

Designed for general lighting applications in the office, supermarket, shop, school, hotel, etc. It is also widely used for public areas such as stairways, lobby's, reception and corridors etc.

Wired to external flicker -free Triac dimmable driver

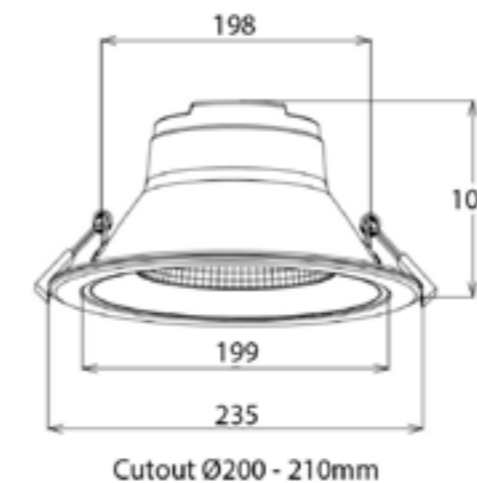

Finish	White
Wattage	35W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3CCT selectable [3000K/4000K/5700K]
CRI	≥80
Lumens	3100- 3600lm
Beam width	60°
LED Driver	In built
Dimmable	Yes
Material	Aluminium/PC

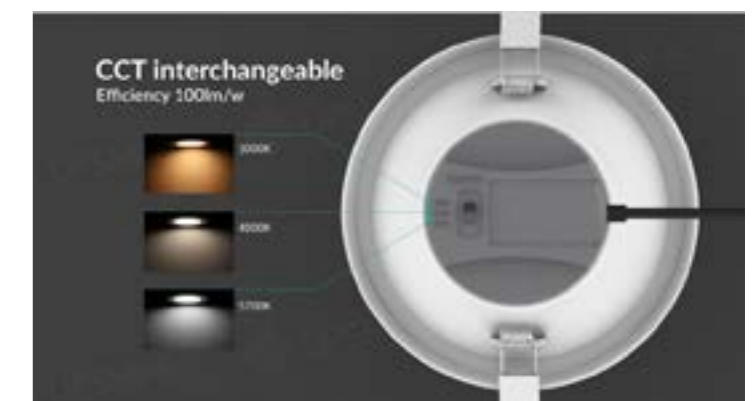



Napoli 31.5W DALI LED White Recessed Downlight

The Napoli 31.5W DALI LED white recessed downlight. Wired to local Osram OTi DALI dimmable driver.



Lamp	1x 31.5W Citizen COB LED inbuilt
------	-------------------------------------


Finish	White
--------	-------

Dimensions

Diameter	165mm
----------	-------

Depth	130mm
-------	-------

Cut out	150mm
---------	-------

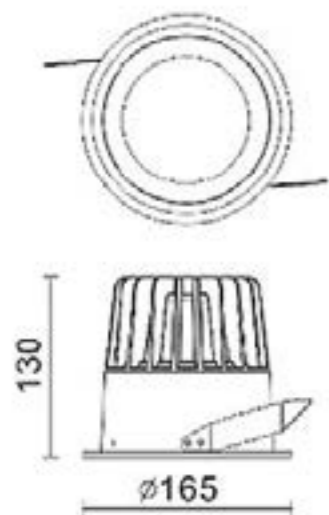

Siena 13W DALI LED White Recessed Downlight

The Siena 13W DALI LED white recessed downlight. Wired to local Osram OTi DALI dimmable driver.





Lamp	1x 13W Citizen COB LED inbuilt
Finish	White trim, black recess

Dimensions

Diameter	100mm
----------	-------

Depth	75mm
-------	------

Cut out	90mm
---------	------

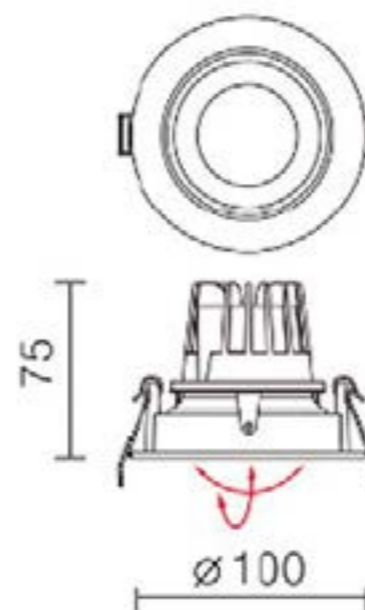




VUE Downlighter [White]



The Vue 6W LED IP44 2700K adjustable recessed downlight, White. Wired to local Triac dimmable driver. IP44 rated in the front. Deep reflector with an impressively low UGR rating of <16 signifying the lowered level of discomfort on the eye from glaring. Adjustable by 30° each direction. CE certified.

Finish	White
Wattage	6W
Voltage	AC220-240VAC
Light Source	LED COB
CCT	2700K
CRI	≥ 80
Lumens	450-650
Beam width	36°
LED Driver	Local
Dimmable	Yes [Triac Dimmable]
Material	Aluminium/PC

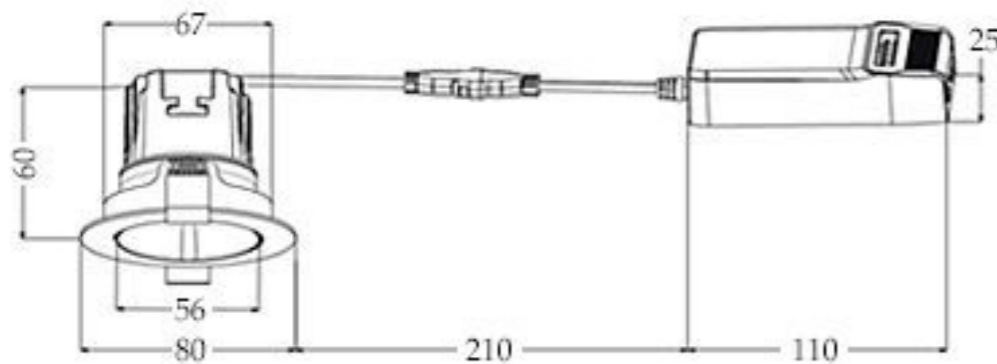

CE IP44
on front




VUE Downlighter [Black]



VUE are a mini low glare recessed downlight, they have a deep reflector which supports low glare effect, so all the users will have a comfortable visual experience.

The lamp adopts ADC12 aluminium housing to reach a great thermal management and ensure a steady and long lifespan. Citizen COB chip with high lumen efficiency, the deep reflector and transparent PC lead a rimless lighting effect.

Finish	Black
Wattage	6W
Voltage	AC220-240VAC
Light Source	LED COB
CCT	2700K
CRI	≥ 80
Lumens	450-650
Beam width	36°
LED Driver	Local
Dimmable	Yes [Triac Dimmable]
Material	Aluminium/PC

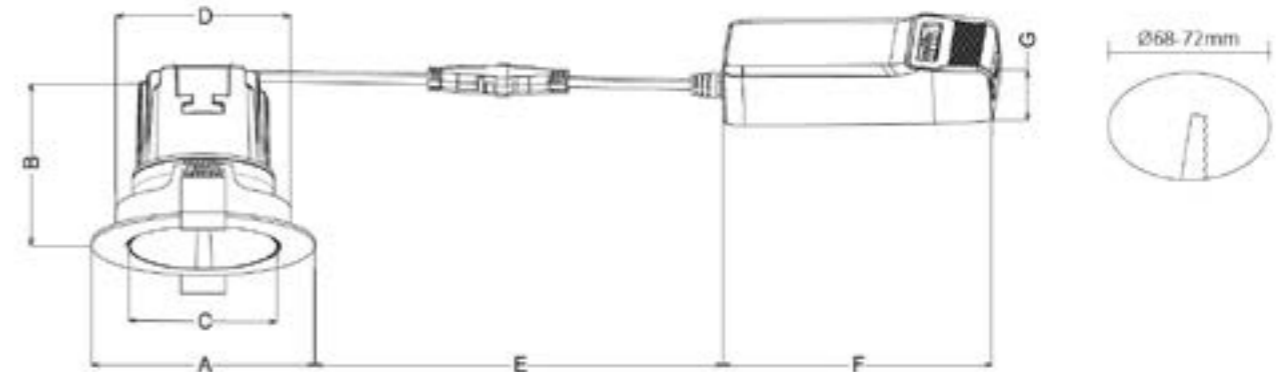

A - 80 mm
B - 60 mm
C - 54 mm
D - 67mm
E - 210 mm
F - 110 mm
G - 25 mm

CE IP44
on front



Iris 3W White Ejectable Recessed LED Downlight, 8°

The Iris 3W White ejectable recessed LED downlight, 8° c/w local HEP driver. Red Dot Award winner 2016.

Also available in black.




Lamp	1x Osram 3W LED inbuilt
Finish	White

Dimensions

Diameter	60mm
Recess depth	61mm
Cut out	50mm

Cut out :
Ø50



Iris 3W Black Ejectable Recessed LED Downlight, 8°

The Iris 3W Black ejectable recessed LED downlight, 8° c/w local HEP driver. Red Dot Award winner 2016.

Also available in white.





Lamp	1x Osram 3W LED inbuilt
Finish	Black

Dimensions

Diameter	60mm
Recess depth	61mm
Cut out	50mm

Cut out :
Ø50





POP 2 Twin Downlight [White 4000K]



The POP2 recessed downlighter has a high lumen COB light source with special optic lens and reflector design producing uniform light with low glare effect.

It has a modular reflector which allows easy replacement for different beam width.

The AL6063 housing provides great thermal heat management.

The range of adjustability of the heads makes it ideal for lighting in retail shops & supermarkets. There is also a dimmable driver which allows it be used in hospitality settings like restaurants & hotels.

Finish	White
Wattage	30W [2 x15W]
Voltage	AC220-240VAC
Light Source	LED COB
CCT	4000K
CRI	90
Lumens	2430
Beam width	24°
LED Driver	Remote
Dimmable	Yes - Triac dimmable
Material	Aluminium



POP 2 Twin Downlighter [White 3000K]




The POP2 recessed downlighter has a high lumen COB light source with special optic lens and reflector design producing uniform light with low glare effect.

It has a modular reflector which allows easy replacement for different beam width.

The AL6063 housing provides great thermal heat management.


The range of adjustability of the heads makes it ideal for lighting in retail shops & supermarkets. There is also a dimmable driver which allows it be used in hospitality settings like restaurants & hotels.

Finish	White
Wattage	30W [2 x15W]
Voltage	AC220-240VAC
Light Source	LED COB
CCT	3000K
CRI	90
Lumens	2430
Beam width	24°
LED Driver	Remote
Dimmable	Yes - Triac dimmable
Material	Aluminium

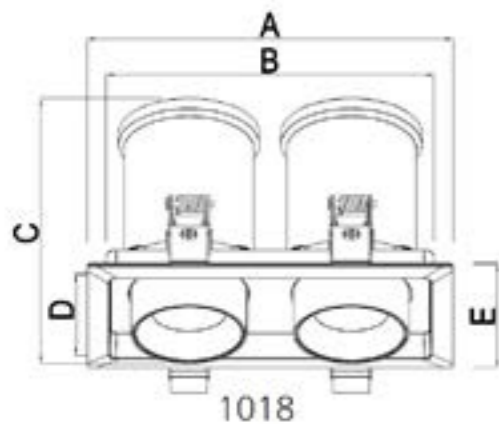

A - 180mm
B - 162mm
C - 114mm
D - 82 mm
E - 100mm

Cutout - 90mm x 170mm

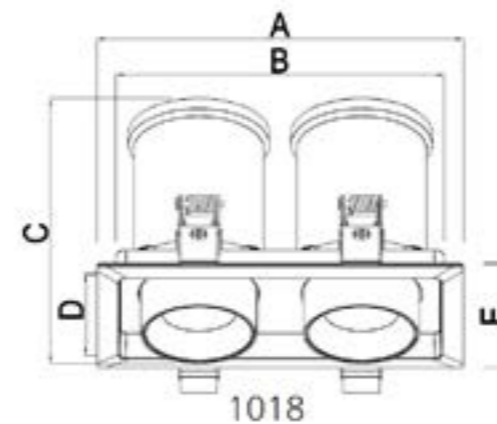

A - 180mm
B - 162mm
C - 114mm
D - 82 mm
E - 100mm

Cutout - 90mm x 170mm



POP 2 Twin Downlighter [Black 3000K]




The POP2 recessed downlighter has a high lumen COB light source with special optic lens and reflector design producing uniform light with low glare effect

It has a modular reflector which allows easy replacement for different beam width

The AL6063 housing provides great thermal heat management

The range of adjustability of the heads makes it ideal for lighting in retail shops & supermarkets. There is also a dimmable driver which allows it be used in hospitality settings like restaurants & hotels

Finish	Black
Wattage	30W [2 x15W]
Voltage	AC220-240VAC
Light Source	LED COB
CCT	3000K
CRI	90
Lumens	2430
Beam width	24°
LED Driver	Remote
Dimmable	Yes - Triac dimmable
Material	Aluminium

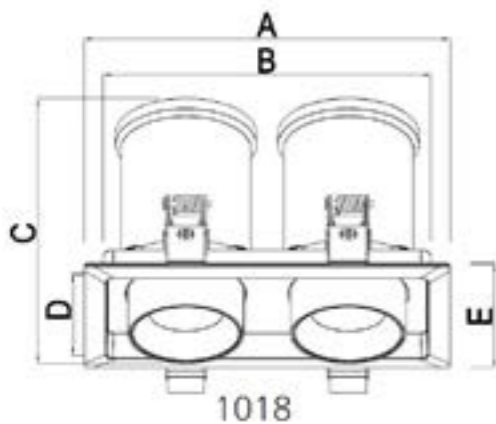

A - 180mm
B - 162mm
C - 114mm
D - 82 mm
E - 100mm

Cutout - 90mm x 170mm



POP 2 Twin Downlighter [Black 4000K]




The POP2 recessed downlighter has a high lumen COB light source with special optic lens and reflector design producing uniform light with low glare effect.

It has a modular reflector which allows easy replacement for different beam width.

The AL6063 housing provides great thermal heat management.

The range of adjustability of the heads makes it ideal for lighting in retail shops & supermarkets. There is also a dimmable driver which allows it be used in hospitality settings like restaurants & hotels.

Finish	Black
Wattage	30W [2 x15W]
Voltage	AC220-240VAC
Light Source	LED COB
CCT	4000K
CRI	90
Lumens	2430
Beam width	24°
LED Driver	Remote
Dimmable	Yes - Triac dimmable
Material	Aluminium

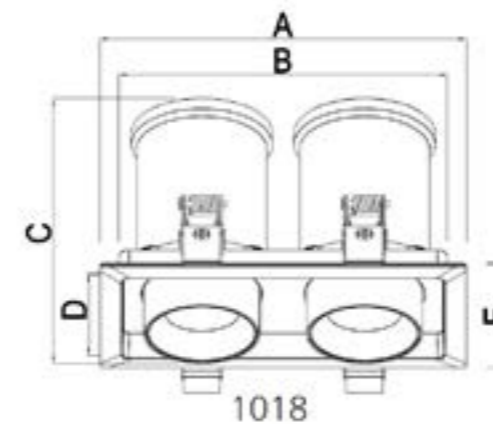

A - 180mm
B - 162mm
C - 114mm
D - 82 mm
E - 100mm

Cutout - 90mm x 170mm





Met 20 Hi Brightness Mini Recessed LED Spot Light




The Met 20 hi brightness 1W mini recessed LED spot light, 3.2V 350mA. Aluminium power LED mini spot light with an IP43 rating. CE certified

Ideal for cabinetry & recesses, fitting comes supplied with treading rear fitting ring or side mounted spring clips

350mA remote drivers supplied separately and fittings must be wired in series

In 3500K white or Amber
Narrow 10° beam or Wide 40° beam

Dimensions:
Pressure assembly into 21mm hole
Outer diameter 27mm

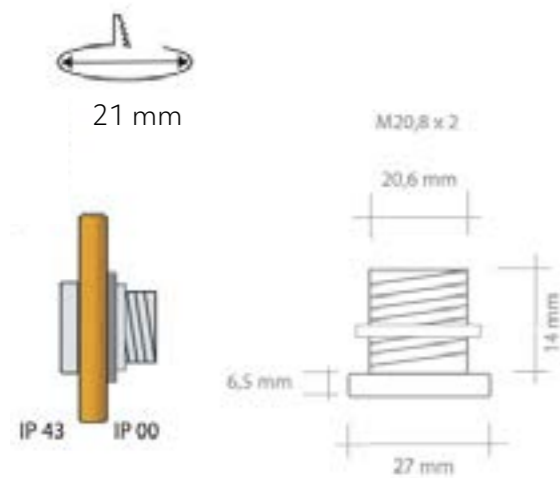

Finish	Aluminium
Wattage	1W
Voltage	3.2V
Light Source	1W LED inbuilt
CCT options	2700K / Amber
CRI	>80
Lumens	90 lm
Beam width options	10° / 40°
LED Driver	Not included
Dimmable	No

CE IP43



Met 28 Hi Brightness Mini Recessed LED Spot Light



The Met 28 hi brightness 2.2W mini recessed LED spot light, 3.1V 700mA. Aluminium power LED mini spot light with an IP43 rating. CE certified


Ideal for cabinetry & recesses, fitting comes supplied with treading rear fitting ring or side mounted spring clips

700mA remote drivers supplied separately and fittings must be wired in series

In 2700K warm white or Amber. Narrow 10° beam or Wide 40° beam

Pressure assembly into 28mm hole
Outer diameter 36mm

Finish	Aluminium
Wattage	2.2W
Voltage	3.1V
Light Source	2.2W LED inbuilt
CCT options	2700K / Amber
Cri	>80
Lumens	194 lm
Beam width options	10° / 40°
LED Driver	Not included
Dimmable	No

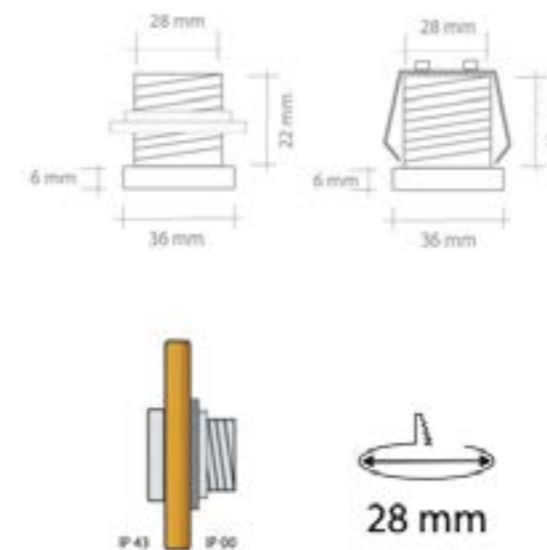

CE IP43


Gloc Garden Spike Light 3W 24V [Black]

Gloc Garden Spike Light 10W 24V [Black]



Gloc Garden Spike light - One step to the classy outlook of a garden. Spike lights can be used home garden or commercial setting garden or public, parks - to highlight & enhance planting/shrubbery and buildings, to create attractive glow.

Finish	Black RAL 9005
Wattage	3W
Voltage	24V DC
Light Source	1 x 3W Nichia
CCT	3000K
Beam width	20°
LED Driver	Not included
Material	Aluminum

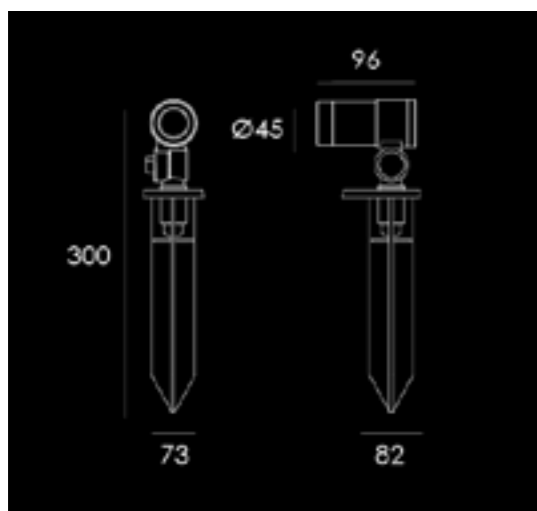


Units in mms

CE IP66



Gloc Garden Spike light - One step to the classy outlook of a garden. Spike lights can be used home garden or commercial setting garden or public, parks - to highlight & enhance planting/shrubbery and buildings, to create attractive glow.

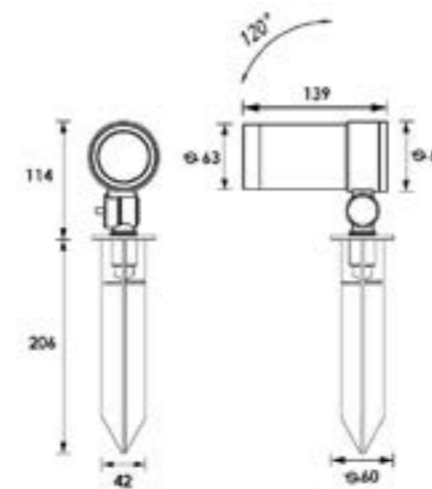

Units in mms

CE IP66



Finish	Black RAL 9005
Wattage	10W
Voltage	24V DC
Light Source	1 x 10W Nichia
CCT	3000K
Beam width	20°
LED Driver	Not included
Material	Aluminum




2 Metre 3 Circuit Track & Accessories, White



2 Metre 3 Circuit Track & Accessories, white finish. Designed for easy surface mounting or suspended using kits.

One of many advantages of the three-circuit system is its high loading capacity and the possibility of forming independent fixture groups in all three circuits.

Also available in black.

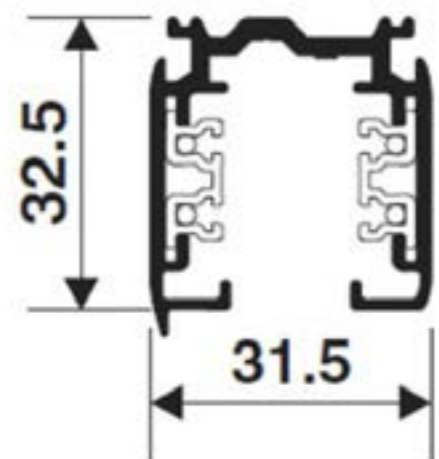

Dimensions

Length	2 metres.
Width	31.5mm
Height	32.5mm

Connectors are available to meet custom lengths.




2 Metre 3 Circuit Track & Accessories, Black



2 Metre 3 Circuit Track & Accessories, Black finish. Designed for easy surface mounting or suspended using kits.

One of many advantages of the three-circuit system is its high loading capacity and the possibility of forming independent fixture groups in all three circuits.


Also available in white.

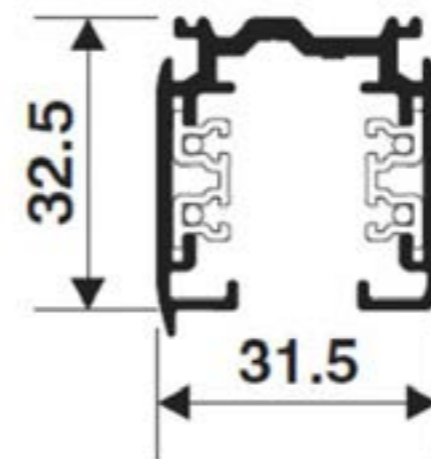

Dimensions

Length	2 metres.
Width	31.5mm
Height	32.5mm

Connectors are available to meet custom lengths.





Hunter 10W LED Flicker Free Trackspot, 15-60° 3000K, Triac Dimmable

The Hunter 10W LED Flicker Free TrackSpot, 15-60°, 3000K Triac Dimmable. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam and dimming variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 15W and 30W versions (non-dimmable) here.

For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	10W Triac Dimmable Citizen cob LED inbuilt.
------	---

Finish	Black
--------	-------


Lumen	330-960Lm
-------	-----------

Dimensions

Diameter	65mm
----------	------

Length	137-160mm
--------	-----------

Height	234mm
--------	-------

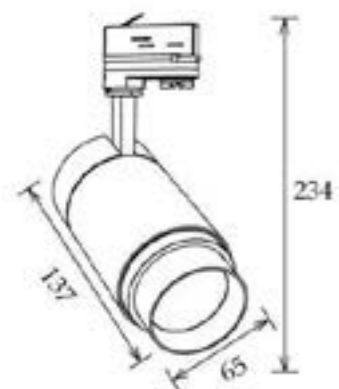

Hunter 10W LED Flicker Free Trackspot, 15-60° 3000K, Triac Dimmable

The Hunter 10W LED Flicker Free TrackSpot, 15-60°, 3000K Triac Dimmable. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam and dimming variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 15W and 30W versions (non-dimmable) here.

For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	10W Triac Dimmable Citizen cob LED inbuilt.
------	---

Finish	White
--------	-------


Lumen	330-960Lm
-------	-----------

Dimensions

Diameter	65mm
----------	------

Length	137-160mm
--------	-----------

Height	234mm
--------	-------






Hunter 15W LED Flicker Free Trackspot, 15-60°, 3000K

The Hunter 15W LED Flicker Free TrackSpot, 15-60°, 3000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 30W and 10W versions here.

For use with 3 circuit track only.

ROHS compliant & CE certified.

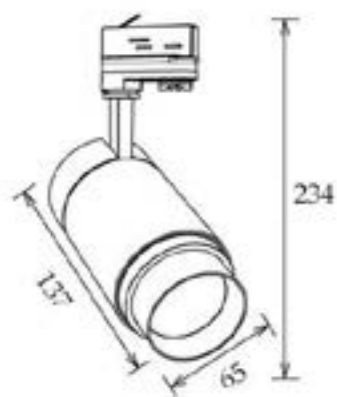

Lamp	15W Citizen cob LED inbuilt.
Finish	Black
Lumen	500-1500Lm

Dimensions	
Diameter	65mm
Length	137-165mm
Height	234mm




Hunter 15W LED Flicker Free Trackspot, 15-60°, 3000K

The Hunter 15W LED Flicker Free TrackSpot, 15-60°, 3000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 30W and 10W versions here.


For use with 3 circuit track only.

ROHS compliant & CE certified.

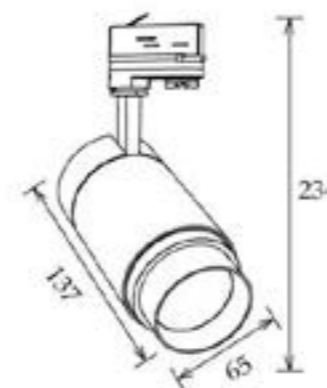

Lamp	15W Citizen cob LED inbuilt.
Finish	White
Lumen	500-1500Lm

Dimensions	
Diameter	65mm
Length	137-165mm
Height	234mm





Hunter 15W LED Flicker Free Trackspot, 15-60° 4000K

The Hunter 15W LED Flicker Free TrackSpot, 15-60°, 4000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 30W and 10W versions here.


For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	15W Citizen cob LED inbuilt.
Finish	Black
Lumen	500-1500Lm

Dimensions

Diameter	56mm
Length	137-165mm
Height	234mm

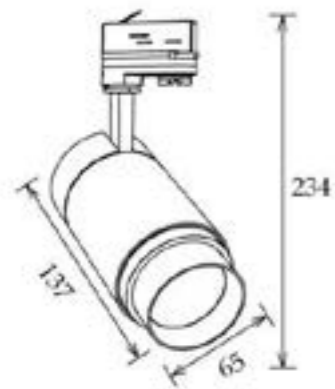

Hunter 15W LED Flicker Free Trackspot, 15-60° 4000K

The Hunter 15W LED Flicker Free TrackSpot, 15-60°, 4000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 30W and 10W versions here.


For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	15W Citizen cob LED inbuilt.
Finish	White
Lumen	500-1500Lm

Dimensions

Diameter	56mm
Length	137-165mm
Height	234mm





Hunter 30W LED Flicker Free Trackspot, 15-60° 3000K


The Hunter 30W LED Flicker Free TrackSpot, 15-60°, 3000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 15W and 10W versions here.

For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	30W Citizen cob LED inbuilt.
Finish	Black
Lumen	1000-3000Lm

Dimensions	
Diameter	100mm
Length	175-205mm
Height	250mm

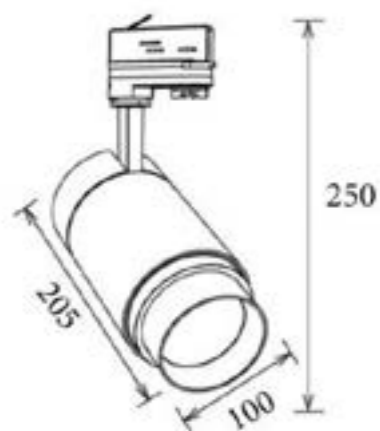

Hunter 30W LED Flicker Free Trackspot, 15-60°, 3000K



The Hunter 30W LED Flicker Free TrackSpot, 15-60°, 3000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 15W and 10W versions here.

For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	30W Citizen cob LED inbuilt.
Finish	White
Lumen	1000-3000Lm

Dimensions	
Diameter	100mm
Length	175-205mm
Height	250mm

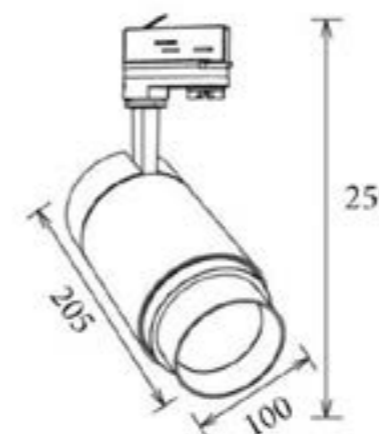



Hunter 30W LED Flicker Free Trackspot, 15-60° 4000K

The Hunter 30W LED Flicker Free TrackSpot, 15-60°, 4000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 15W and 10W versions here.


For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	30W Citizen cob LED inbuilt.
Finish	Black
Lumen	1000-3000Lm

Dimensions

Diameter	100mm
Length	175-205mm
Height	250mm

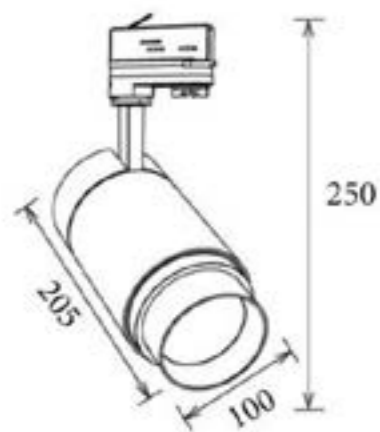

Hunter 30W LED Flicker Free Trackspot, 15-60° 4000K

The Hunter 30W LED Flicker Free TrackSpot, 15-60°, 4000K. With an impressive CRI97 rating which gives a high colour rendering clarity. The adjustable head gives alternative beam variations. Ideal for highlighting & focusing on individual areas i.e tables & walls. Flicker free technology. Also available in 15W and 10W versions here.


For use with 3 circuit track only.

ROHS compliant & CE certified.

Lamp	30W Citizen cob LED inbuilt.
Finish	White
Lumen	1000-3000Lm

Dimensions

Diameter	100mm
Length	175-205mm
Height	250mm






Pioneer White 25W Focus Adjustable LED Track Spotlight, 3000K



The Pioneer white 25W focus adjustable LED track spotlight, 4000K, c/w integral Tridonic driver. This innovative adjustable spot gives you 3 beam angle options – 25°, 40° & 60°. Ideal where changeable light distribution is required.

For use with 3 circuit track only.

Also available in 4000K & in a black finish. Full 2 year warranty.

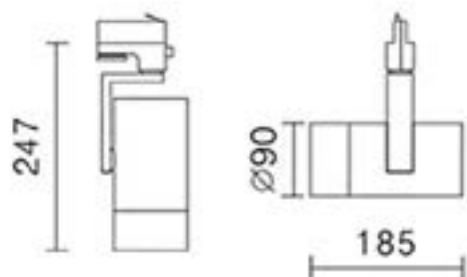

Lamp	1x 25W Citizen COB LED inbuilt.
Finish	White

Dimensions	
Spot ø	90mm
Length	185mm
Max projection	247mm




Pioneer Black 25W Focus Adjustable LED Track Spotlight, 3000K



The Pioneer black 25W focus adjustable LED track spotlight, 3000K, c/w integral Tridonic driver. This innovative adjustable spot gives you 3 beam angle options – 25°, 40° & 60°. Ideal where changeable light distribution is required.


For use with 3 circuit track only.

Also available in 4000K & in a white finish. Full 2 year warranty.

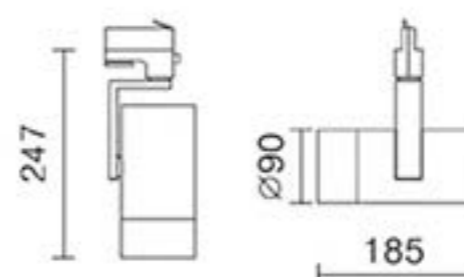

Lamp	1x 25W Citizen COB LED inbuilt.
Finish	Black

Dimensions	
Spot ø	90mm
Length	185mm
Max projection	247mm





Pioneer White 25W Focus Adjustable LED Track Spotlight, 4000K




The Pioneer white 25W focus adjustable LED track spotlight, 4000K, c/w integral Tridonic driver. This innovative adjustable spot gives you 3 beam angle options – 25°, 40° & 60°. Ideal where changeable light distribution is required.

For use with 3 circuit track only.

Also available in 3000K & in a black finish.

Full 2 year warranty.

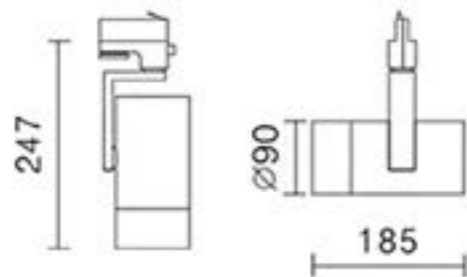

Lamp 1x 25W Citizen COB LED inbuilt.

Finish White

Dimensions

Spot ø 90mm

Length 185mm

Max projection 247mm



Pioneer Black 25W Focus Adjustable LED Track Spotlight, 4000K




The Pioneer black 25W focus adjustable LED track spotlight, 4000K, c/w integral Tridonic driver. This innovative adjustable spot gives you 3 beam angle options – 25°, 40° & 60°. Ideal where changeable light distribution is required.

For use with 3 circuit track only.

Also available in 3000K & in a white finish.

Full 2 year warranty.

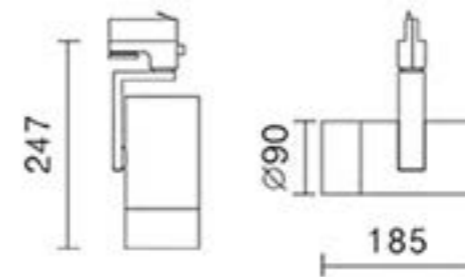

Lamp 1x 25W Citizen COB LED inbuilt.

Finish Black

Dimensions

Spot ø 90mm

Length 185mm

Max projection 247mm





Lina Linear Track [White]




The Lina 3-circuit track fitting with linear form factor and polycarbonate cover produces a soft wide beam of light, which allows it to act as a 'fill' light where required

This can alleviate the harsh contrast of light/dark areas which can occur when just exclusively using track spotlights only

Used as a background additional light source in supermarkets, specialty retail stores, shop windows or exhibition halls

It has the added versatility of being able to change the colour temperature of the light by simply pushing the slide switch located on the side of the fitting

Finish	White
Wattage	10W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3CCT
	3000K/4000K/5700K
CRI	≥80
Lumens	1000
Beam width	110 °
LED Driver	In built
Dimmable	No
Material	Aluminium/PC

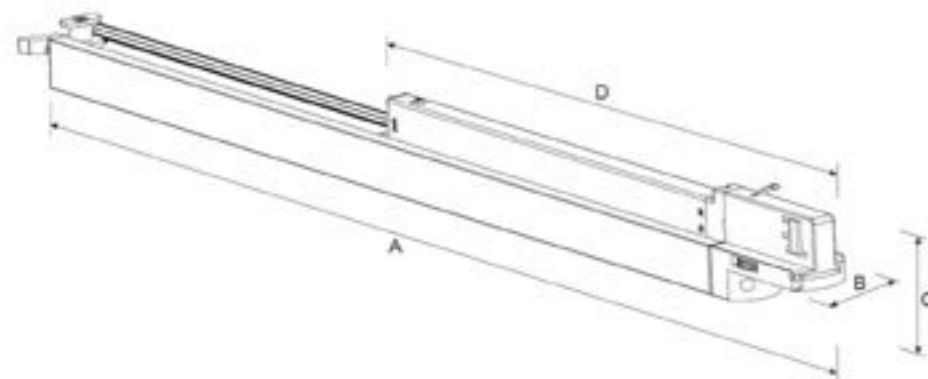

A - 650mm
B - 32.5mm
C - 52 mm
D - 436mm



Lina Linear Track [Black]



The Lina 3-circuit track fitting with linear form factor and polycarbonate cover produces a soft wide beam of light, which allows it to act as a 'fill' light where required

This can alleviate the harsh contrast of light/dark areas which can occur when just exclusively using track spotlights only

Used as a background additional light source in supermarkets, specialty retail stores, shop windows or exhibition halls

It has the added versatility of being able to change the colour temperature of the light by simply pushing the slide switch located on the side of the fitting

Finish	Black
Wattage	10W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3CCT
	3000K/4000K/5700K
CRI	≥80
Lumens	1000
Beam width	110 °
LED Driver	In built
Dimmable	No
Material	Aluminium/PC



A - 650mm
B - 32.5mm
C - 52 mm
D - 436mm





2 Metre Single Circuit Track & Accessories, Black


2 Metre Single Circuit Track & Accessories, Black finish. Designed for easy surface mounting or suspended using kits.

Also available in white.

Dimensions

Length	2 metres.
Width	35mm
Height	18mm

Connectors are available to meet custom lengths.

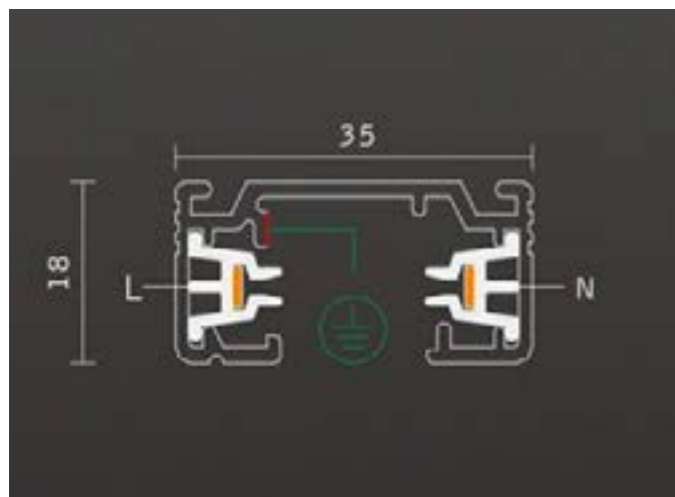

2 Metre Single Circuit Track & Accessories, White



2 Metre Single Circuit Track & Accessories, white finish. Designed for easy surface mounting or suspended using kits.

Also available in black.

Dimensions

Length	2 metres.
Width	35mm
Height	18mm

Connectors are available to meet custom lengths.

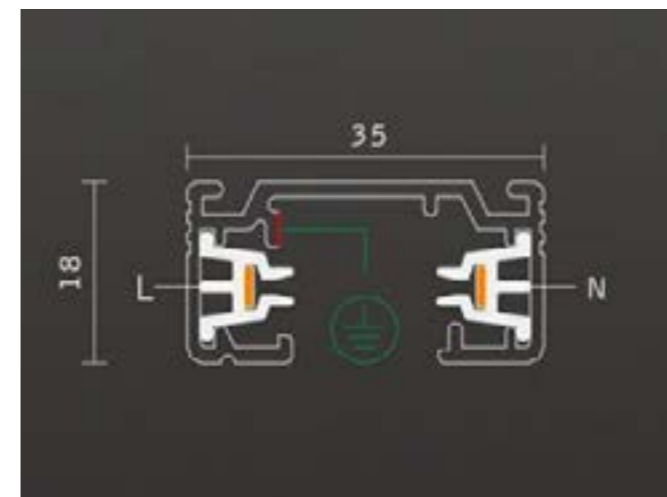



Tube Black GU10 Dimmable Surface Spotlight



Tube White GU10 Dimmable Surface Spotlight




The Tube black GU10 dimmable surface spotlight complete with ceiling base. Also available in white or in a track lighting version.

Lamp	1x GU10
Finish	Black

Dimensions

Spot \varnothing	53mm
Length	90mm
Base \varnothing	70mm
Max projection	166mm


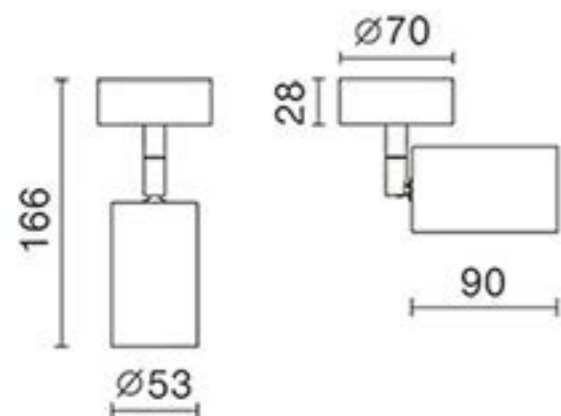


The Tube white GU10 dimmable surface spotlight complete with ceiling base. Also available in black or in a track lighting version.

Lamp	1x GU10
Finish	White

Dimensions

Spot \varnothing	53mm
Length	90mm
Base \varnothing	70mm
Max projection	166mm

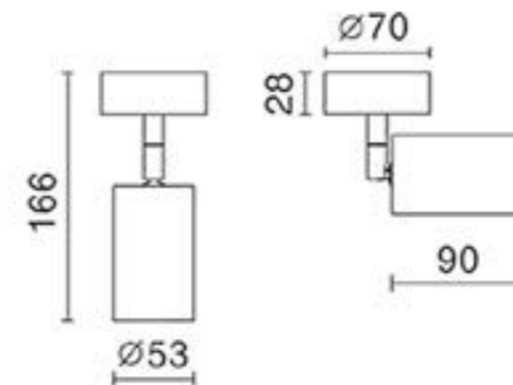



Tube Black GU10 Dimmable Track Spotlight


The Tube black GU10 dimmable track spotlight. Also available in a surface ceiling version & in a White finish.

For use with single circuit track only.

Lamp	1x GU10
Finish	Black

Dimensions

Spot \varnothing	54mm
Length	90mm
Max projection	148mm

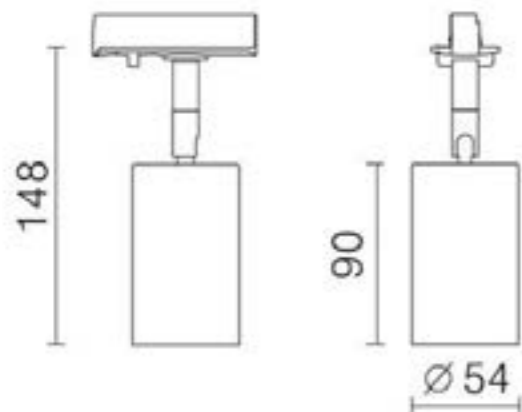

Tube White GU10 Dimmable Track Spotlight



The Tube white GU10 dimmable track spotlight. Also available in a surface ceiling version & in a Black finish.

For use with single circuit track only.

Lamp	1x GU10
Finish	White

Dimensions

Spot \varnothing	54mm
Length	90mm
Max projection	148mm

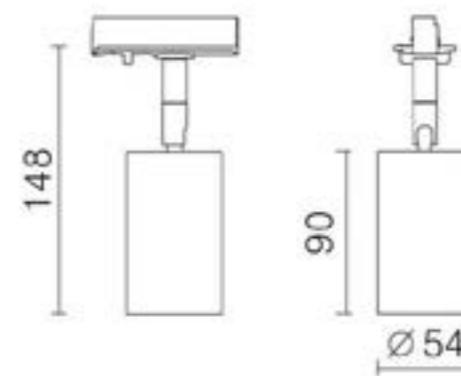



Micro Black 2 Metre Single Circuit Track

Micro 2 metre single circuit track in black. Complete with live and dead end.

Suitable for Micro track spots only

Dimensions

Length	2 metres.
Width	14mm
Height	13mm

Connectors are available to meet custom lengths.



Micro White 2 Metre Single Circuit Track


Micro 2 metre single circuit track in white. Complete with live and dead end.

Suitable for Micro track spots only

Dimensions

Length	2 metres.
Width	14mm
Height	13mm

Connectors are available to meet custom lengths.






Micro Recessed Adjustable Spotlight [Black]



The Micro 7.7W 24V adjustable black recessed spotlight, beam adjustment 10-40°, complete with anti-glare honeycomb

The adjustable head gives alternative beam and dimming variations. Ideal for highlighting & focusing on individual areas

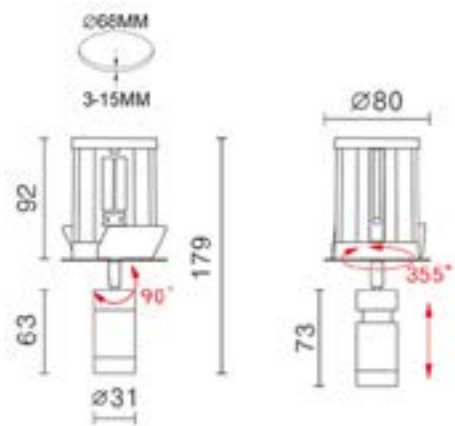

Finish	Black
Wattage	7.7W
Voltage	24V
Light Source	LED 1 x7.7W CREE LED Built in
CCT	2100K with filter or 2700K
Lumens	550lm
Beam width	10 – 40°
LED Driver	Remote
Dimmable	Yes
Material	Aluminium
Optional Accessories	Gel filter 2100K




Micro Recessed Adjustable Spotlight [White]



The Micro 7.7W adjustable 24V white recessed spotlight, beam adjustment 10-40°, complete with anti-glare honeycomb

The adjustable head gives alternative beam and dimming variations. Ideal for highlighting & focusing on individual areas

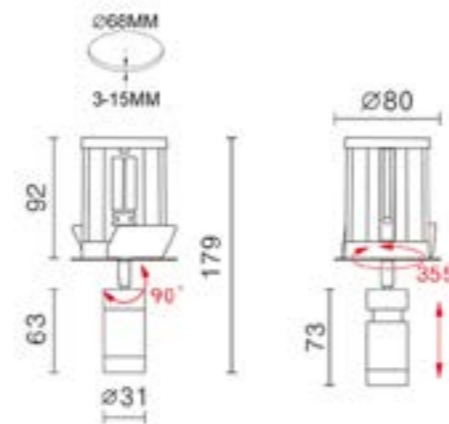

Finish	White
Wattage	7.7W
Voltage	24V
Light Source	LED 1 x7.7W CREE LED Built in
CCT	2100K with filter or 2700K
Lumens	550lm
Beam width	10 – 40°
LED Driver	Remote
Dimmable	Yes
Material	Aluminium
Optional Accessories	Gel filter 2100K

CE □ IP20

CE □ IP20




Micro Surface Adjustable Spotlight [Black]



The Micro 7.7W adjustable 24V black surface spotlight, with beam adjustment of 10-40° comes with antiglare honeycomb

This is a very compact product with an elegant & mini sized design. It is convenient for the end user to adjust the focus and beam angle. Precise light distribution is not only good for highlighting artworks in a showcase, but also good for restaurants and private homes

Finish	Black
Wattage	7.7W
Voltage	24V
Light Source	1 x 7.7W CREE LED Built in
CCT	2700K, 2100K with gel filter
Lumens	550lm
Beam width	10 – 40°
LED Driver	Inbuilt
Dimmable	Yes
Material	Aluminium
Optional Accessory	Gel Filter 2100K

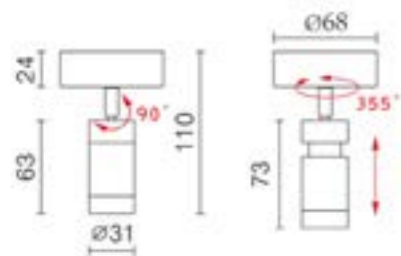

CE IP20




Micro Surface Adjustable Spotlight [White]



The Micro 7.7W adjustable 24V white surface spotlight, with beam adjustment of 10-40° comes with antiglare honeycomb

This is a very compact product with an elegant & mini sized design. It is convenient for the end user to adjust the focus and beam angle. Precise light distribution is not only good for highlighting artworks in a showcase, but also good for restaurants and private homes

Finish	White
Wattage	7.7W
Voltage	24V
Light Source	1 x 7.7W CREE LED Built in
CCT	2100K with gel filter or 2700K
Lumens	550lm
Beam width	10 – 40°
LED Driver	Remote
Dimmable	Yes
Material	Aluminium
Optional Accessory	Gel Filter 2100K

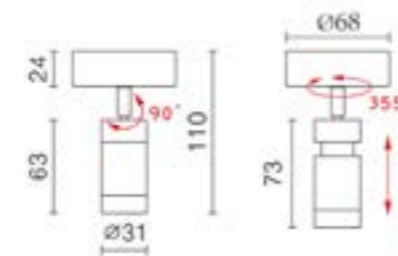

CE IP20




Micro Surface Adjustable Spotlight [White]



The Micro 7.7W adjustable 24V white surface spotlight, with beam adjustment of 10-40° comes with antiglare honeycomb

This is a very compact product with an elegant & mini sized design. It is convenient for the end user to adjust the focus and beam angle. Precise light distribution is not only good for highlighting artworks in a showcase, but also good for restaurants and private homes

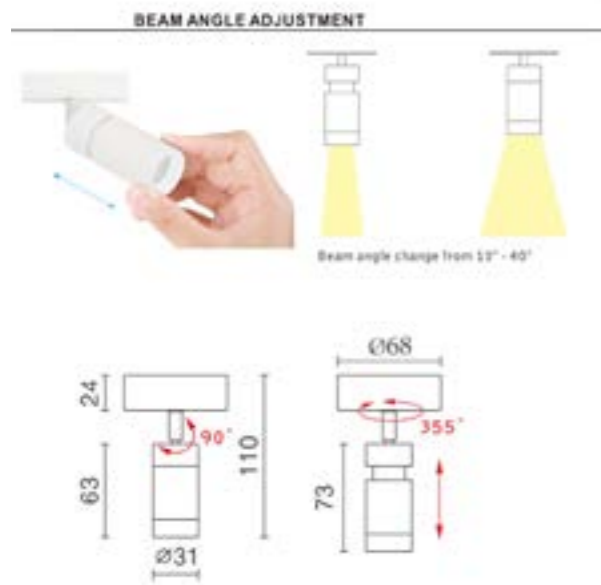

Finish	White
Wattage	7.7W
Voltage	24V
Light Source	1 x 7.7W CREE LED Built in
CCT	2100K with gel filter or 2700K
Lumens	550lm
Beam width	10 – 40°
LED Driver	Remote
Dimmable	Yes
Material	Aluminium
Optional Accessory	Gel Filter 2100K

CE III IP20




Micro Track Adjustable Spotlight [Black]




The Micro 7.7W adjustable 24V black track spotlight, beam adjustment 10-40° complete with anti-glare honeycomb

This is a very compact product with an elegant & mini sized design. It is convenient for the end user to adjust the focus and beam angle. Precise light distribution is not only good for highlighting artworks in a showcase, but also good for restaurants and private homes

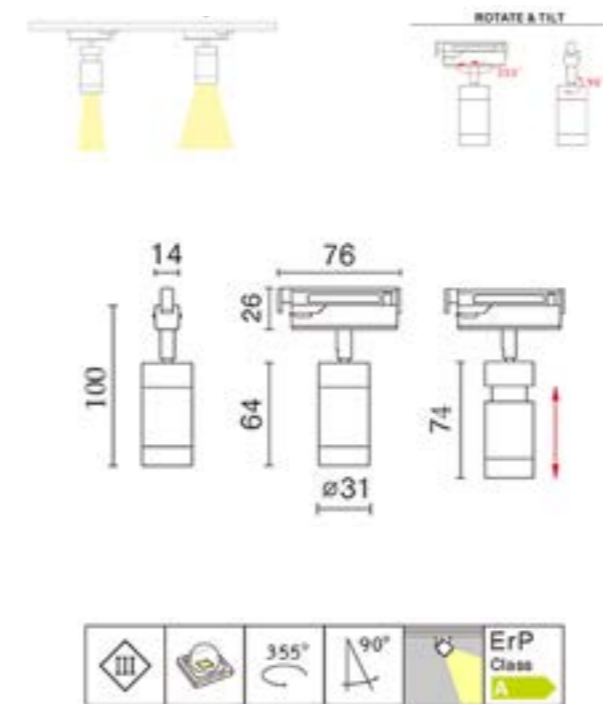

LED	LUMINAIRE CONSUMPTION	INPUT	LED COLOR
CREE	7.7W	24V	2700K


CE III IP20

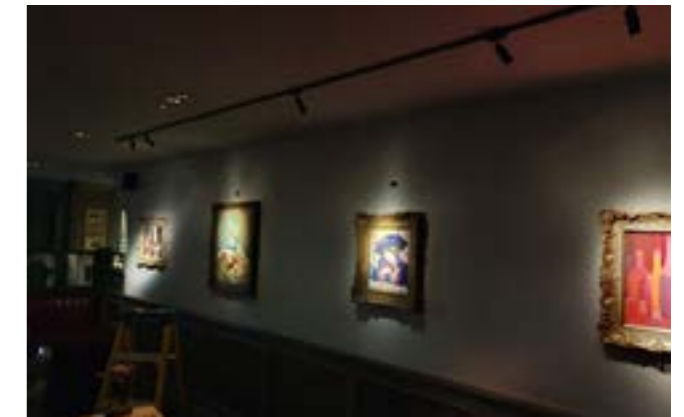

Finish	Black
Wattage	7.7W
Voltage	24V
Light Source	7.7W CREE LED Built in
CCT	2100K with filter or 2700K
Lumens	550lm
Beam width	10 – 40°
LED Driver	Remote
Dimmable	Yes
Material	Aluminium
Optional Accessories	Gel filter 2100K

Stork 24x1.5W Recessed Linear LED Ground Light, 2200K

Stork 24x1.5W Recessed Linear LED Ground Light, 2200K. In a grey RAL 7037 die casted powder coated aluminium with 6mm tempered glass. 24 Volt DC, ROHS compliant & CE certified.

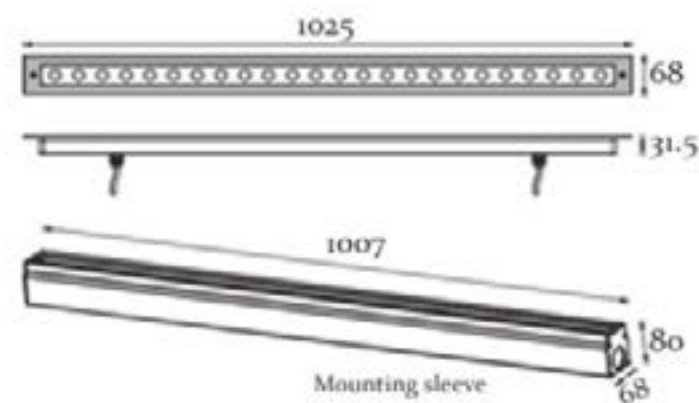

Wattage	44W
Voltage	24V
Kelvin	2200K
Dimmable	Yes
Driver incl.	No
Lamp	24 x 1.5W Osram single colour LED's. Actual total consumption is 44W.
Material	Powder coated aluminium and tempered glass.

Dimensions	
Length	1025mm.
Width	68mm
Housing depth	80mm.

CE  IP67


Lark 6x2W Recessed LED Ground Light, 2100K


The Lark 6x2W recessed LED ground light, 2100K c/w honeycomb accessory. In a powder coated grey stainless steel with 8mm tempered glass. 240 Volt DC, ROHS compliant & CE certified.



Lamp	6x2W Osram LED
Material	Stainless steel and tempered glass

Dimensions	
Diameter	173mm
Depth	86mm
Depth required for housing	149mm

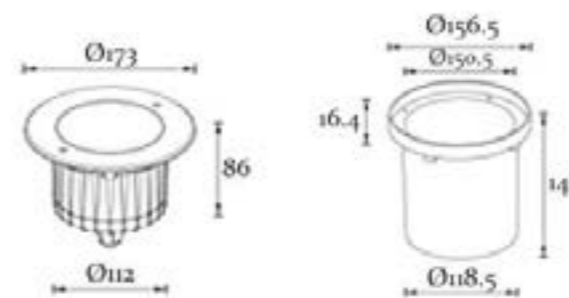

CE 



Taper 2W 2100K 9°
 Recessed Uplight 24V
 [Stainless Steel]




The Taper 2W 9° LED recessed groundlight, 24V. In 2100K extra warm white. Complete with honeycomb diffuser. In a dark grey powder coated aluminium with 7mm tempered glass. 24 Volt DC, ROHS compliant & CE certified.

Exterior strong up light
 Power LED inground light

Fitting diameter: 55mm x Depth: 82.5mm

Allow Ø85mm x H98mm space for housing in concrete

Finish	Stainless Steel
Wattage	2W
Voltage	24VDC
Light Source	Osram single colour LED
Lumens	143
Beam width	9°
LED colour	Extra warm white
Dimmable	No
Material	Powder coated aluminium and tempered glass
Accessories	Honeycomb Louver

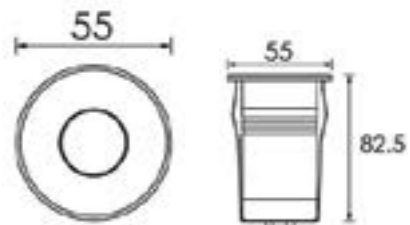

Units in mm

CE IP65



Taper 2W 3000K 9°
 Recessed Uplight 24V
 [Stainless Steel]




The Taper 2W 9° LED recessed groundlight, 24V. In 3000K white. Complete with honeycomb diffuser. In a dark grey powder coated aluminium with 7mm tempered glass. 24 Volt DC, ROHS compliant & CE certified.

Exterior strong up light
 Power LED inground light

Fitting diameter: 55mm x Depth: 82.5mm

Allow Ø85mm x H98mm space for housing in concrete

Finish	Stainless Steel
Wattage	2W
Voltage	24VDC
Light Source	Osram
Lumens	183
Beam width	9°
LED colour	Extra warm white
Dimmable	No
Material	Powder coated aluminium and tempered glass
Accessories	Honeycomb Louver

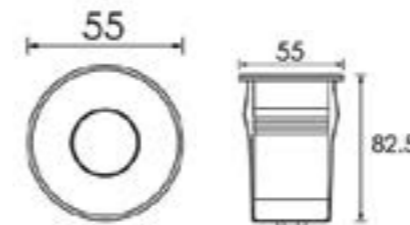

Units in mm


CE IP65

Chamfer Inground Uplighter



Lamp	NICHIA COB
Material	Aluminium KAP7037
Wattage	1 x 5W
CCT	3000K
Housing	Grey powdered coated aluminium housing box with 8mm of tempered glass..

Dimensions	
Diameter	70mm
Height	95.5mm

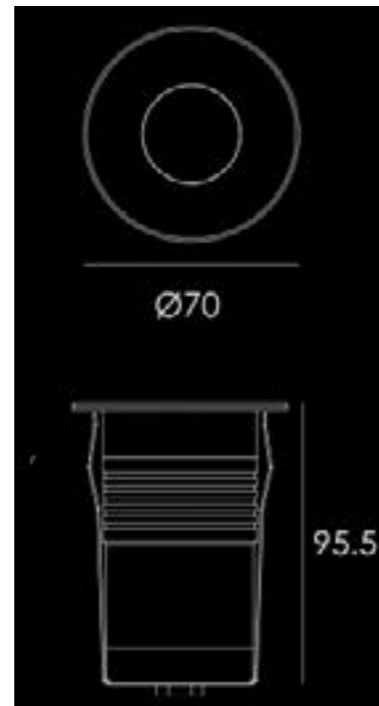


Skylark 1×2.1W Recessed LED Ground Light, 2000K



The Skylark 1×2.1W recessed LED ground light, 2000K. Most suitable for joinery application. In a dark grey powder coated aluminium with 7mm tempered glass. 24 Volt DC, ROHS compliant & CE certified.

Lamp	1 x 2.1W Osram single colour LED.
Material	Powder coated aluminium and tempered glass.

Dimensions	
Diameter	58mm
Depth	43mm
Cut out	42mm (48mm required for driver converter)

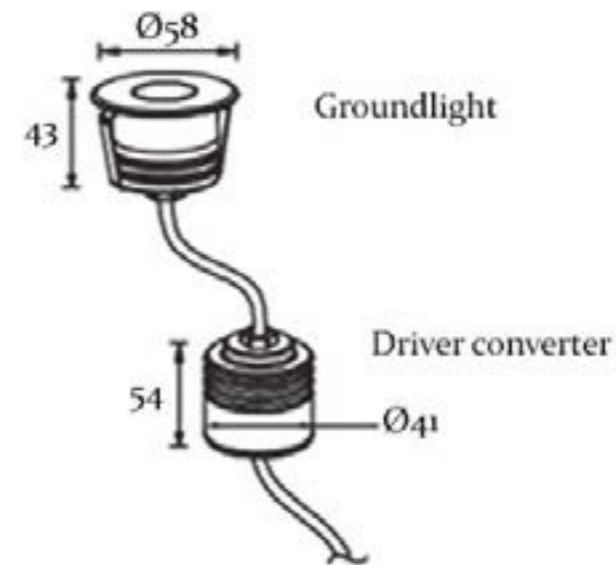




Puck Stainless Steel Inground Light 1 Way





Puck Stainless Steel Inground Light 4 Way

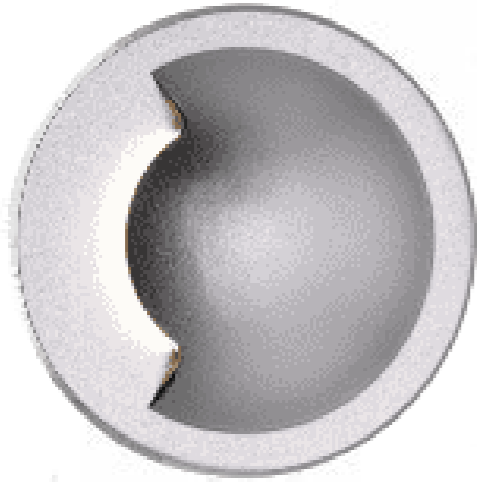

Lamp	OSRAM SMD3030
Material	Metal
Max Wattage	2W
Kelvin	3000K
Dimensions	
Diameter	55mm
Depth	86.5mm



Lamp	OSRAM SMD3030
Material	Metal
Max Wattage	2W
Kelvin	3000K
Dimensions	
Diameter	55mm
Depth	86.5mm

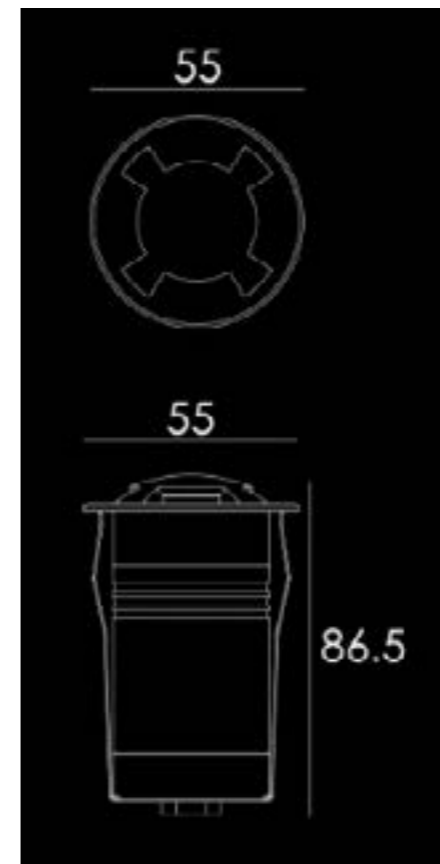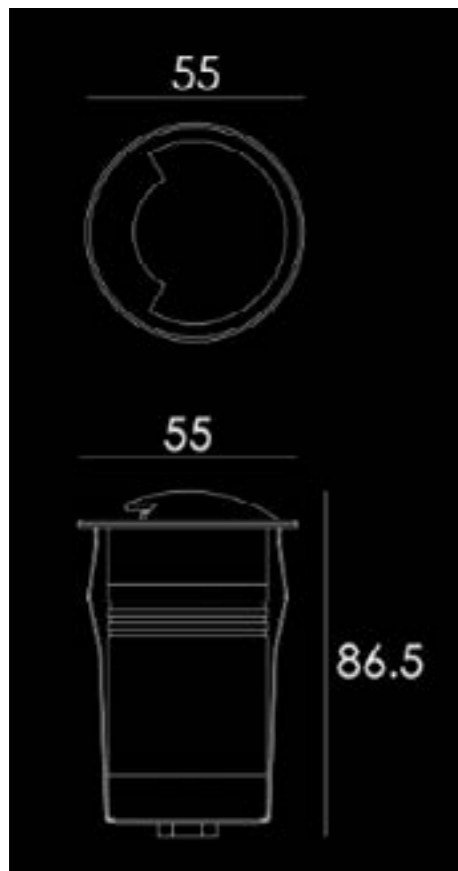

Burian 2126 Aluminium Channel





The AL6063-T aluminium profile undergoes a high quality surface treatment

The thick polycarbonate cover produces a no dot soft and uniform light effect

Profile and cover have IK10 impact and IP65 ingress protection and thus can be used widely in indoor & outdoor floors

When used in outdoor applications it is recommended to use an IP68 rated led strip cut and re-sealed accordingly to suit length of profile

Special orders can be made with complete fitting assembled including profile, cover, led strip inside, cable gland and pre-wired tail to length from the fitting

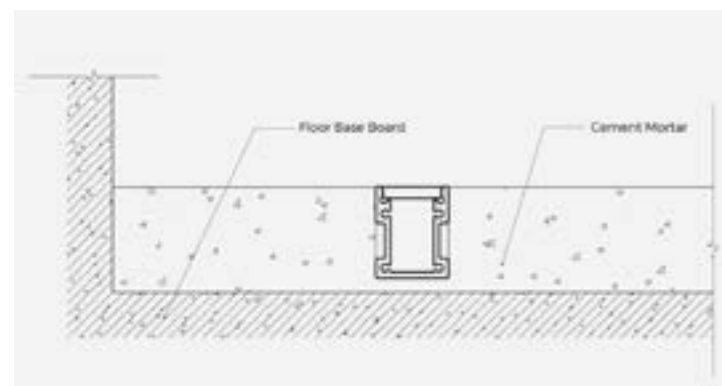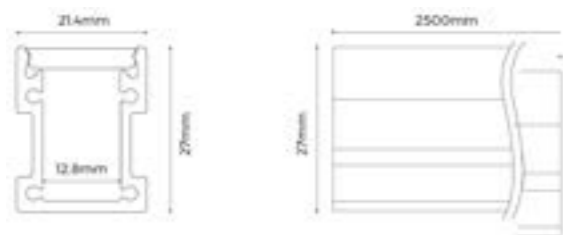

Model No	NL_HC_BURIAN2126_PROFILE
Material	AL6063-T5
Surface Processing	Anodized
Diffuser	Opal Polycarbonate
Light Transmittance	>75%
Heat Dissipation	Max 19.2W/m

Accessories

End caps

End caps silver [without hole]

NL_HC_BURIAN2126_ENDCAPS
[2 pieces per set]



End caps silver [with hole]

NL_HC_BURIAN2126_EC-HOLE
[2 pieces per set]



Slip 0510 Aluminium Channel



Ultimate slim with 3.4mm luminous surface

Flexible in a variety of narrow spaces for outlining & decorating



AL6063-T5 aluminum profile + silicone neon strip, making it extremely

Convenient to install and maintain the light source

Applicable to indoor damp environments

Model No NL_HC_2.5_SLIP

Material	AL6063-T5
Surface Processing	Anodizing
LED Strip	Silicone neon

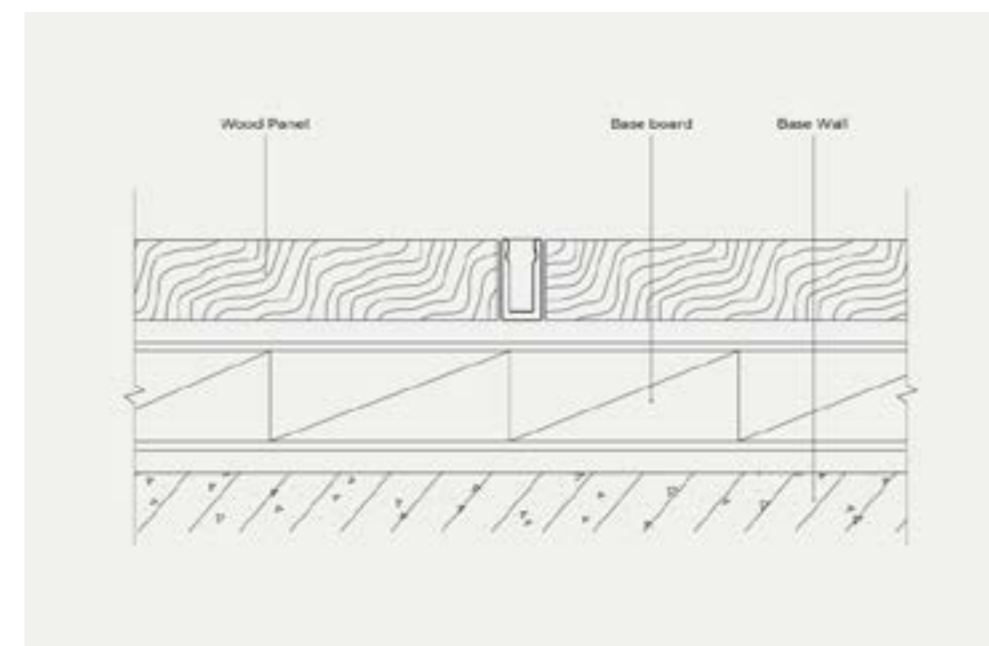


4.1 W RGB LED Mini Surface Pinspot 24V [Black]



The 4.1W black RGB surface dimmable pinspot 24VDC, 30°. Ideal for highlighting & focusing on individual areas i.e tables & walls. ROHS compliant & CE certified

Diameter: 42mm
Length: 85mm
Standard Projection: 85mm

Finish	Black Ral 9005
Wattage	4.1W
Voltage	24V DC
Light Source	1 x 3W RGB 3 in 1 Full Colour LED Total consumption is 4.1W
Lumens	95 lumens
Beam width	30°
LED Driver	Remote driver -24VDC
LED colour	RGB colour changing
Dimmable	Yes - Triac / PWM 1-10V / Dali
Material	Aluminum anodized

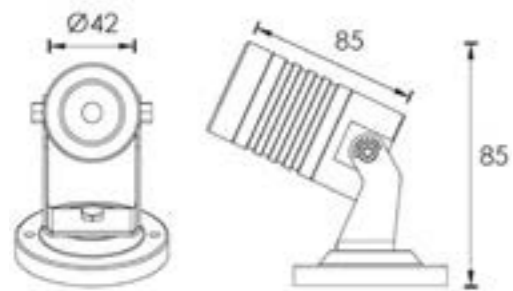

Units in mm

CE IP66


2.6W Black 2100K Surface Dimmable Pinspot 24VDC, 15°



The 2.6W black 2100K extra warm white surface dimmable pinspot 24VDC, 15°. Ideal for highlighting & focusing on individual areas i.e tables & walls. ROHS compliant & CE certified.

Lamp	1 x 2W Osram LED. Total consumption is 2.6W
Finish	Black

Dimensions	
Diameter	42mm
Length	85mm
Projection	85mm

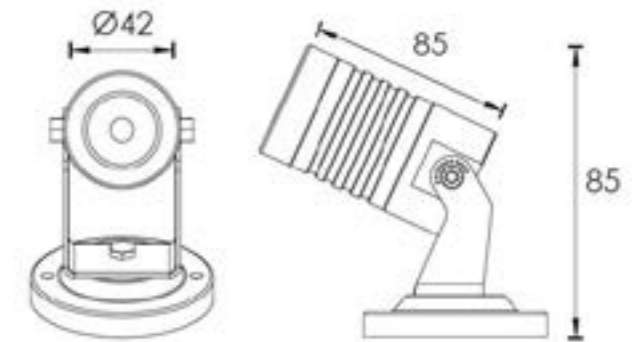

CE □

Raven 1 Surface Spotlight

Raven 2 Surface Spotlight





Lamp	NICHIA
Material	Aluminium KAP7037 Dark Grey
Wattage	10 x 4.5W
CCT	3000K
Voltage	240V
Beam angle	20°
Dimensions	
Diameter	200mm
Height	272mm



Lamp	NICHIA
Material	Aluminium KAP7037 Dark Grey
Wattage	24 x 4.5W
CCT	3000K
Voltage	240V
Beam angle	8°
Dimensions	
Diameter	300mm
Height	390mm



* shown with hood

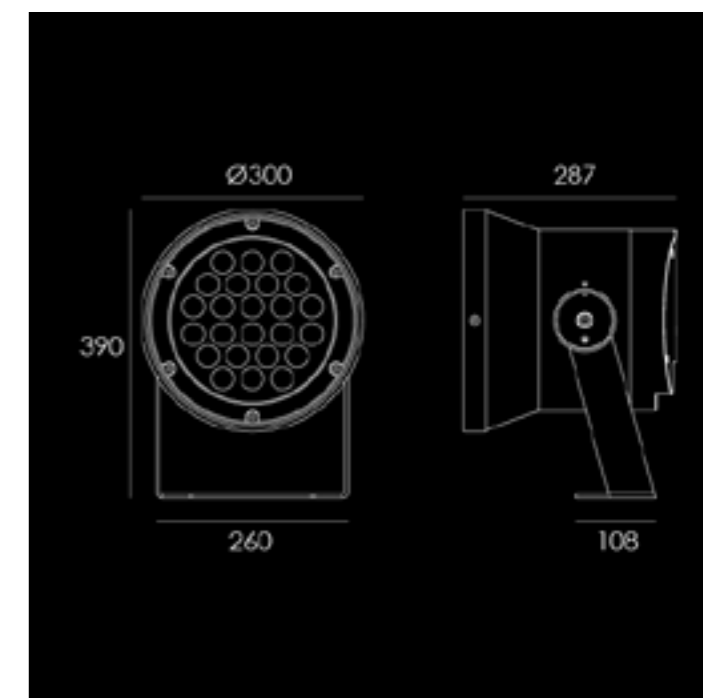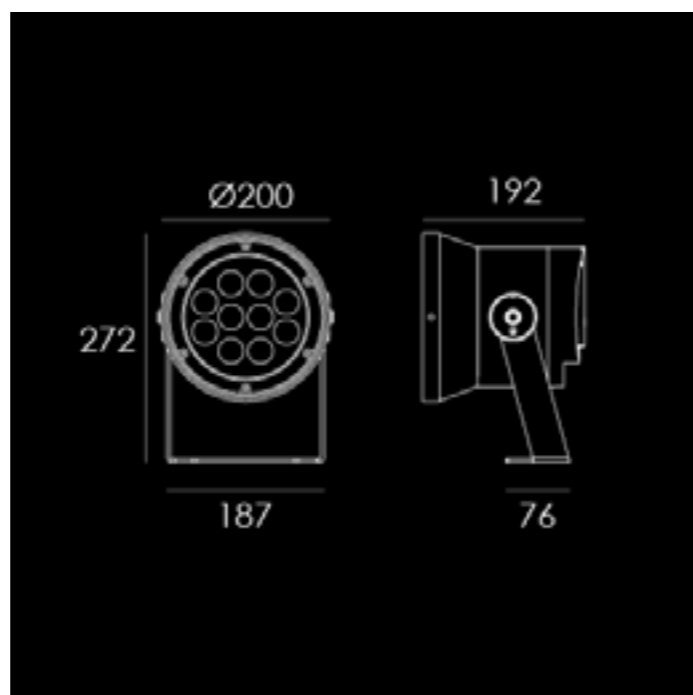


CE IP66

CE



Ledbar 24x1W Linear Wall Washer – 3000K

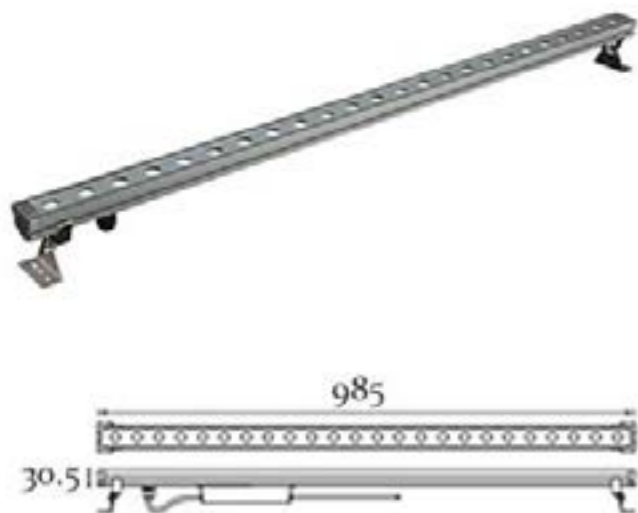

Ledbar 24x1W architectural linear wall washer, 3000K. Comes with the option of 2x 500mm lens hoods. In a grey die casted powder coated aluminium with 4mm tempered glass. 24 Volt DC, ROHS compliant & CE certified

Transformer sold separately. Please enquire for most suitable transformer


Lamp	24 x 1W Osram single colour LED.
Material	Powder coated aluminium and tempered glass.
Voltage	24V
Kelvin	3000K
Lumen	1976
Beam angle	20°
IP Rating	IP66
Dimmable	Yes
Driver	Not includede

Dimensions	
Height	30.5mm
Length	985mm

CE  IP66



Ledbar 12×1.5W RGB Architectural Linear Wall Washer, Small

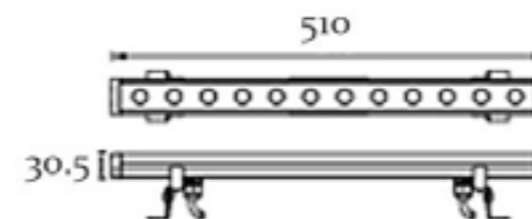


Ledbar 12×1.5W RGB architectural linear wall washer, small. Comes with the option of a 500mm lens hood. In a grey die casted powder coated aluminium with 4mm tempered glass. 24 Volt DC, ROHS compliant & CE certified.

Lamp	12 x 1.5W RGB 3in1 Full Colour LED's.
------	---------------------------------------

Material	Powder coated aluminium and tempered glass.
----------	---

Dimensions	
Height	30.5mm
Length	510mm

CE 



Plaza Panel Light




The Plaza panel light features louver reflectors to make the fitting low glare UGR<19. It offers a stylish design and with its performance makes it a high end option for office task & general lighting

The fitting is designed to allow easy replacement of the LED insert modules thus allowing easy future maintenance

Colour temperature can be quickly altered with an inline switch at the rear of the fitting

Supplied with a Dali dimmable remote driver

The Plaza is an aesthetic option for office & school lighting (offices, meeting & classrooms)

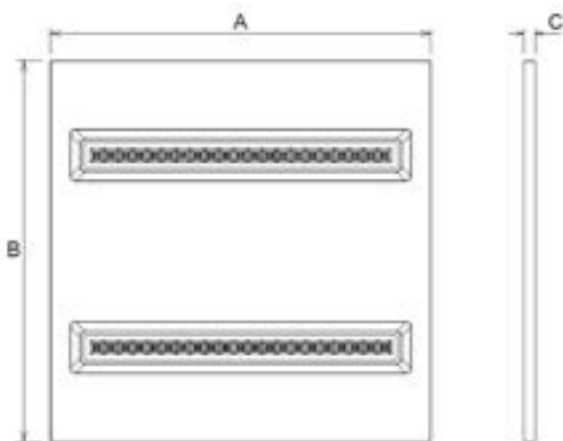

A - 595mm
B - 595mm
C - 15mm



Finish	White RAL 9016
Wattage	35W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	3CCT [3000K/4000K/5700K]
CRI	≥ 80
Lumens	3150-3450
Beam width	90°
UGR Value	<19
LED Driver	Remote
Dimmable	Yes - Dali dimmable
Material	SPCC steel/PC

CE IP20



BAT1 Batten Light



The BAT1 batten light with a double row of SMD LED chips to achieve a high lumen output


Weatherproof resistance thanks to the IP65 high ingress protection

High grade polycarbonate diffuser and housing. Suitable for commercial and industrial use where dust is prevalent such as super markets, office building, workshops etc.


Long lifetime of 40,000 hours



Finish	White
Wattage	42W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	4000K
CRI	≥80
Lumens	3480-3570
Beam width	110 °
LED Driver	Inbuilt
Dimmable	No
Material	PC

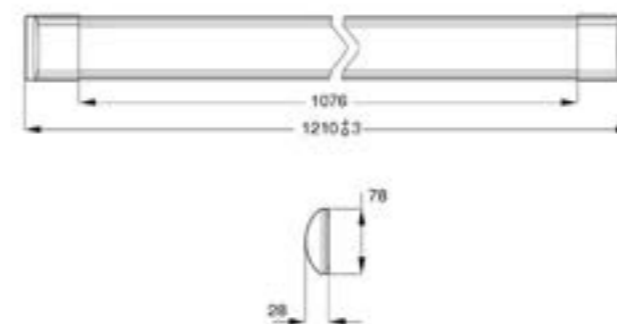

Units in mm

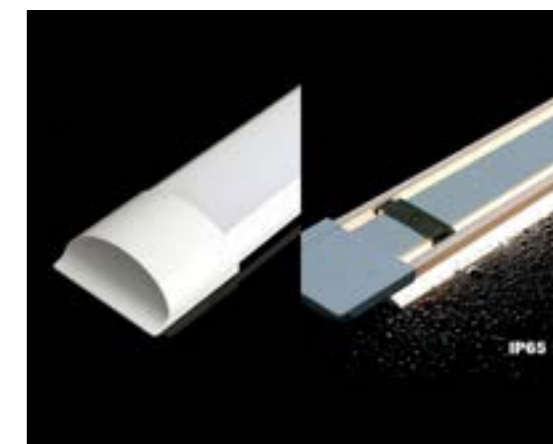

CE IP65

Matrix Triproof Linkable Batten Light




The Matrix comes with waterproof glands at each end of the fitting making it an easy linkable solution for industrial applications

It has a polycarbonate tubular cover providing a uniform soft light output 140° beam

It is also provided with special clip on brackets allowing for easy installation and adjustment of the installation angle

With IK10 impact protection level & IP66 rating it is an ideal solution for factories, warehouses, workshops & other environments with high humidity & dust levels. The form factor provides for an easy cleaning solution

Finish	White Aluminum
Wattage	45W
Voltage	AC220-240VAC
Light Source	LED SMD
CCT	4000K
CRI	≥80
Lumens	5500
Beam width	140 °
LED Driver	In built
Dimmable	No
Material	Aluminium/PC

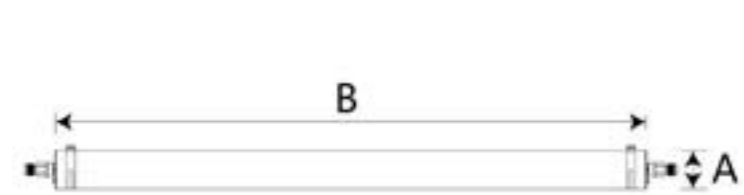

A - 75.2 mm
B - 1500mm



IK10 CE IP66

HI-AISLE Linear High Bay Light



The HiRack LED linear high bay with motion-sensor provides the ideal lighting for warehouse aisles. Asymmetric optic lenses fit tight aisles between high racks quite effectively. Aisles are properly matched by the rectangular light pattern, which significantly reduces light loss. Can be ceiling mounted or wire suspended.

Lamp	SMD LED
Material	Aluminium + Polycarbonate
Wattage	150W
IP rating	IP65
Dimmable	Yes
Input Voltage	AC100-240V, 50/60Hz
CCT	4000K
CRI	70
Beam Angle	40 ° x 120 °
Lumen output	24000LM



Dimensions	
Height	102mm
Length	718mm
Width	173mm

CE IP65

LINPROF-B 5535 Trimless Profile




Linprof [B] 35 is a 50mm large luminous surface, trimless recessed design which can be integrated into architecture


Leakage proof shield design, perfect details

AL6063-T5 aluminum profile with high-quality surface treatment


Multiple optional connectors: 180° direct connection, L type, T type, X type

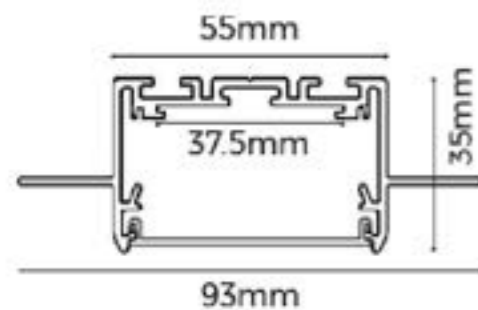

Model No	NL_HC_LIN35B_2.5M
Material	AL6063-T5
Surface	
Processing	Anodized
Diffuser	Opal Polycarbonate
Light	
Transmittance	>86%
Heat Dissipation	Max 38W/m
LED Driver	Remote
Dimmable	Possible with remote drivers
Light Source	LED Flexstrip (excluded)

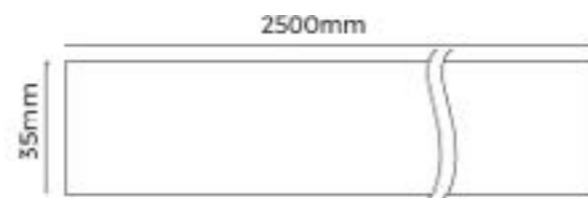

Length - 2500mm



LINPROF-A 5535 Trimless Profile




The LINPROF35 is a recessed trimless profile for plasterboard ceilings

The profile is fixed to the underside of the plasterboard with wings provided for fixing. There are two protruding walls on the profile to allow for skimming a straight line finish on the ceiling

A range of accessories are available to allow creation of long continuous lines or right angle combinations

Model No	NL_HC_LINP35_2.5M
Material	AL6063-T5
Surface	
Processing	Spray painted RAL 9003 white
Diffuser	Opal Polycarbonate
Light	
Transmittance	>86%
Heat Dissipation	Max 38W/m
Lumens	N/A
LED Driver	Remote
Dimmable	Depending on driver chosen
Light Source	LED flexstrip (excluded)

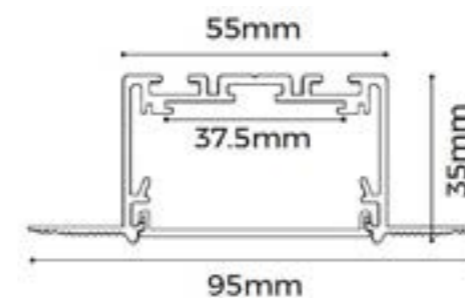

Length - 2500mm



Linprof 70 Surface Profile




The LINPROF70 profile can be suspended, surface ceiling or wall mounted

It comes standard as 2500mm length but can be cut to suit custom sizes

Supplied with easy fit magnetic end caps and PC diffuser to produce a homogeneous light effect

The profile is linkable in sections either as a linear straight run or with an assortment of angle joints

A range of led strips can be incorporated depending on type of application, overall length required and intensity of light needed



Length - 2500mm

Model No	
Black	NL_HC_LINPF70_2.5_BL
Silver	NL_HC_LINPF70_2.5_SI
Material	AL6063-T5
Finish	Black/Silver
Wattage	25W/m
Voltage	24V
Diffuser	Opal Polycarbonate
Heat dissipation	Max 38W/m
Transmittance	>75%
Light Source	LED Flexstrip (Excluded)
Beam width	2500mm
LED Driver	Remote
Dimmable	Dependant of driver chosen



Linprof 70 Surface Profile White





The LINPROF70 profile can be suspended, surface ceiling or wall mounted

It comes standard as 2500mm length but can be cut to suit custom sizes

Supplied with easy fit magnetic end caps and PC diffuser to produce a homogeneous light effect


The profile is linkable in sections either as a linear straight run or with an assortment of angle joints

A range of led strips can be incorporated depending on type of application, overall length required and intensity of light needed

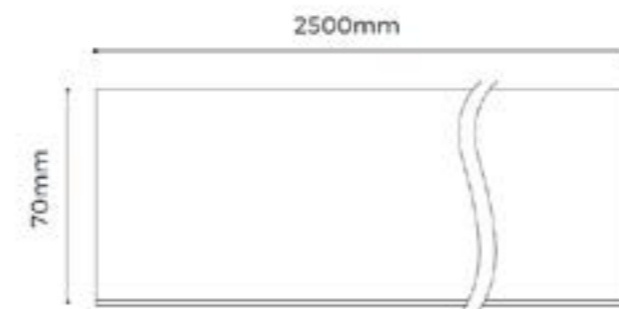

Length - 2500mm


Model No	NL_HC_LINP70_2.5_WH
Material	AL6063-T5
Finish	White
Wattage	25W/m
Voltage	24V
Diffuser	Opal Polycarbonate
Heat dissipation	Max 38W/m
Transmittance	>75%
Light Source	LED Flexstrip (Excluded)
Beam width	2500mm
LED Driver	Remote
Dimmable	Dependant of driver chosen







Verge 2323 Aluminium Channel

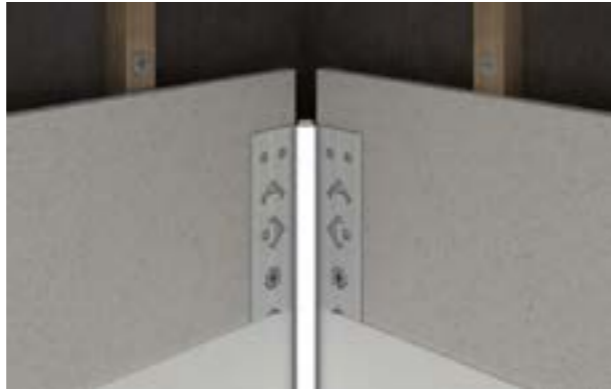

The VERGE2323 profile is designed to be applied to the inner corner of a 90deg change in wall direction

The luminous surface provided on the polycarbonate cover is only 8mm wide for a very slim contemporary light effect produced after final plastering is complete over the side wings

LED Strips with a maximum width of 5mm to be only used inside the profile

The profile comes supplied standard with PC cover and 2x PC end caps fitting

Model No **NL_25_VERGE**

Material AL6063-T5

Surface Processing Anodized

Diffuser Opal Polycarbonate

Light Transmittance >55%

Max W tape



Heat Dissipation Max 9.6 W/m

Accessories

End Caps

NL_VERGE_ENDCAPS_WHOLE
[2 pieces]

NL_VERGE_ENDCAPS_NOHOLE
[2 pieces]

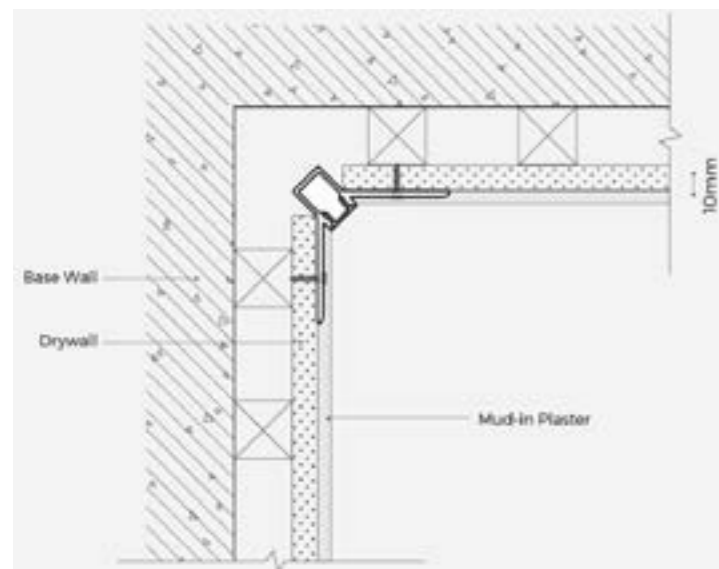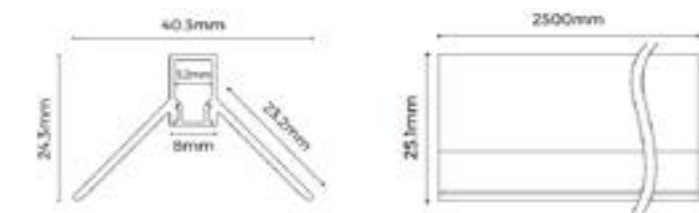

Hanger 3943 Aluminium Channel



The HANGER3943 profile is applied to ceiling edge to allow wall wash lighting effect.

The profile can be embedded prior to final ceiling being installed.

Diffuser helps emit uniform and soft light along the top of the vertical wall.

The profile comes supplied standard with metal end caps also finished RAL9003 white.

Model No **NL_25_HANGER**

Material AL6063-T5

Surface Processing Spraying RAL9003 white

Diffuser Opal Polycarbonate



Light Transmittance >85%

Accessories

End Caps

NL_HANGER_ENDCAPS

End cap without hole
[White x2 pieces]

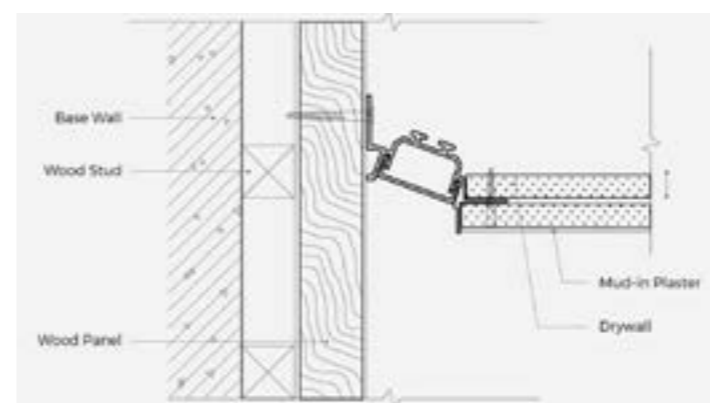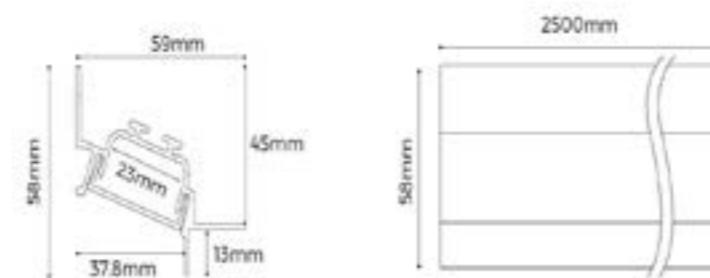



Dual 7070 Aluminium Channel





The DUAL7070 can be applied to plasterboard finish wall / ceiling juncture to create decorative double sided light effect

The arc shaped white polycarbonate cover is designed for a wider luminous surface

The fixing bracket provides a detachable snap on design which makes it easy to install

The visible metal cover which comes standard RAL9003 white can be painted over to allow it to blend seamlessly with the room surface colours if required

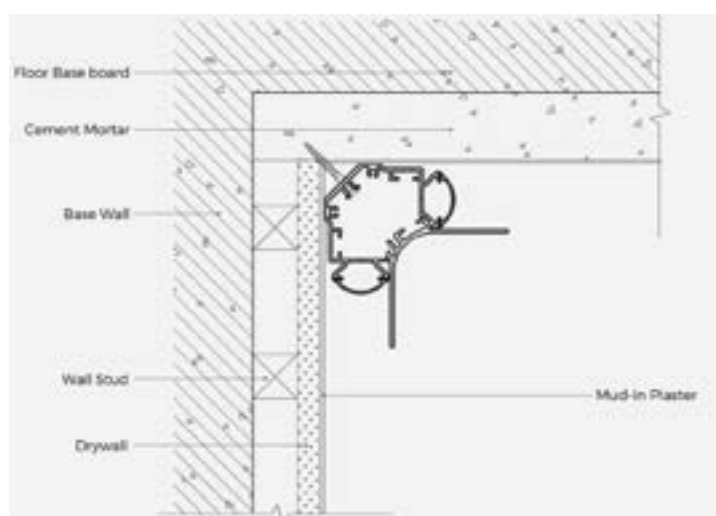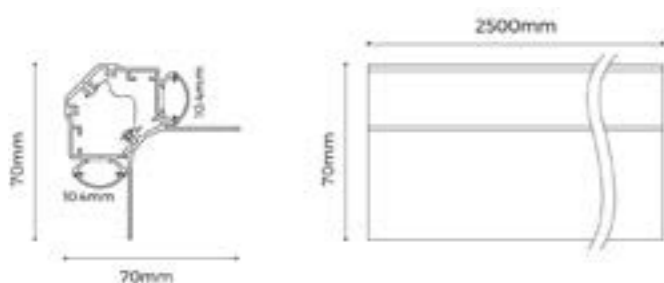

Model No NL_HC_25M_DUAL7070

Material AL6063-T5

Surface Processing Spraying RAL9003 white

Diffuser Opal Polycarbonate

Light Transmittance >70%

Heat Dissipation Max 14.4W/m


Accessories

Mounting clip

NL_DUAL_ENDCAPS
[Silver x2 pieces]



Meir 2507 Aluminium Channel

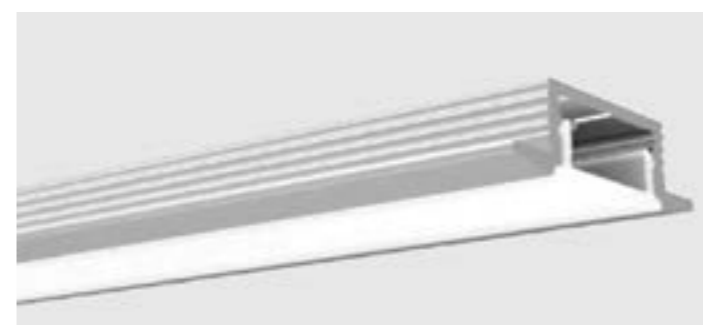

The MEIR2507 with its shallow 7mm depth is an ideal choice for recessing into joinery and with side bezels can hide any imperfections in routed channel

Due to the shallow gap between the led strip and PC diffuser, extra care is required in the selection of the led strip to avoid a 'dotted' effect through the diffuser

The MEIR2507 profile is ideally used as an option where it is not visible to the eye [e.g uplighting behind headboards or in joinery where it is concealed by a downstand]



Model No NL_HC_2.5_MEIR

Material AL6063-T5

Surface Processing Anodized

Diffuser Opal Polycarbonate

Light Transmittance >60%

Max W tape 14.4W

Heat Dissipation

Accessories

End Caps



NL_MEIR_ENDCAPS_NOHOLE

End cap without hole
[Silver x2 pieces]




NL_Meir_ENDCAPS_WHOLE

End cap with hole
[Silver x2 pieces]

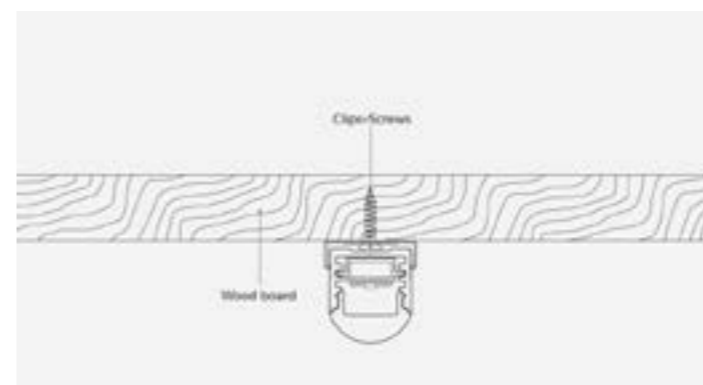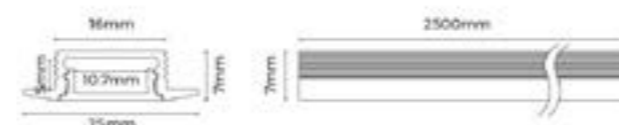

Vimo 0709 Aluminium Channel

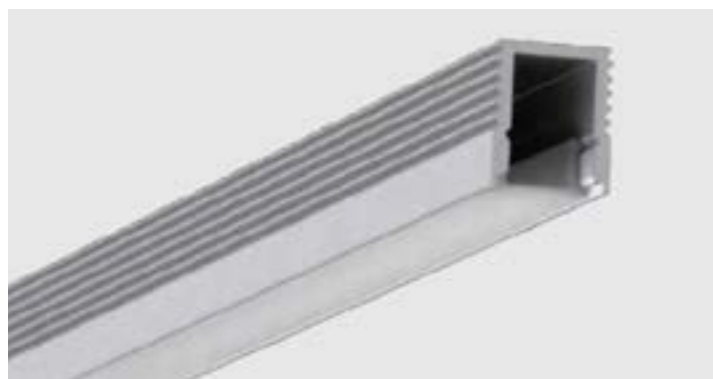

The Vimo 0709 is a super narrow and thin profile best applied in narrow spaces

It provides a sleek contemporary look when used in joinery units

Channel is supplied standard with polycarbonate cover and 2x end caps

It is best used with led strips with maximum width of 4mm and shallow pitch

Model No NL_HC_2.5_VIMO

Material AL6063-T5

Surface Processing Anodizing

Diffuser Opal Polycarbonate

Light Transmittance >55%

Max W tape

Heat Dissipation Max 9.6 W/m

Accessories


Mounting clip

NL_HC_VIMO_MOUNTCLIPS
[Silver x4 pieces per set]




End Caps

NL_HC_VIMO_ECAP_NOHOLE
End cap without hole
[2 pieces per set]

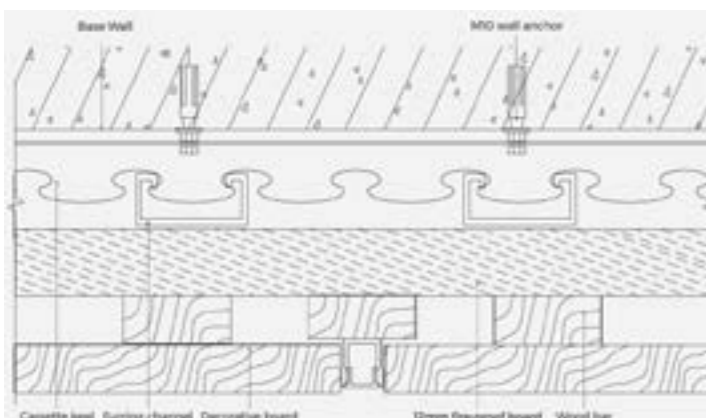

Alba 2013 XL Aluminium Channel

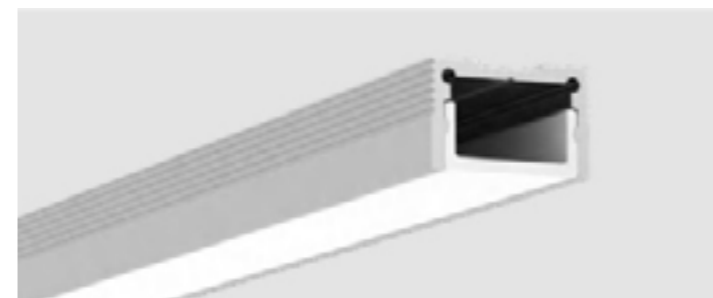

The Alba2013 XL aluminium channel is supplied in 2.5m lengths and comes complete with white diffuser cover for consistent homogenous light effect

The profile can be used as a surface mount fitting or can be flush mounted in joinery that has been routed out to suit dimensions below

Channel is also provided with 2x PC end caps

It can be used with a range of led strips but ideally with strips with narrow led spacing to maintain 'dot free' effect

Model No NL_HC_ALBA_25_SILVER

Material AL6063-T5

Surface Processing Anodizing

Diffuser Opal Polycarbonate

Light Transmittance >60%

Heat Dissipation Max 15W/m

Accessories

Mounting clip


NL_ALBA_XL_MOUNTCLIP




End caps

NL_HC_ALBA_XL_ECAP
Silver end caps without holes [2 pieces per set]

BL_HC_ALBA_XL_ENCAP_WH
Silver end caps with holes [2 pieces per set]

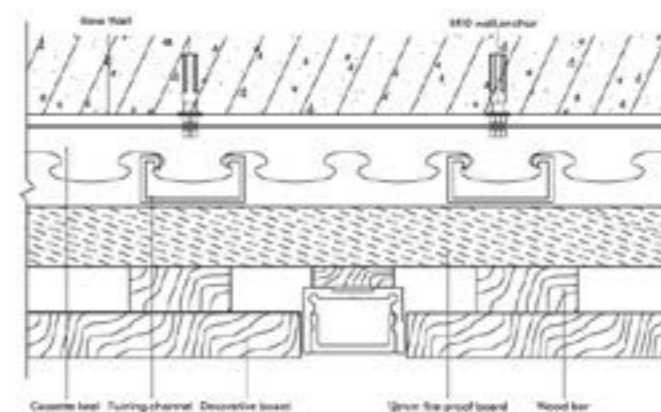

Alba 1613 Aluminium Channel

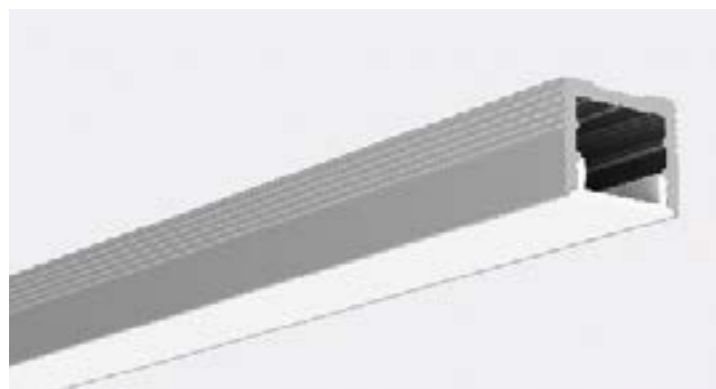

The Alba1613 aluminium channel is supplied in 2.5m lengths and comes complete with white diffuser cover for consistent homogenous light effect

The profile can be used as a surface mount fitting or can be flush mounted in joinery that has been routed out to suit dimensions below

Channel is also provided with 2x PC end caps

It can be used with a range of led strips but ideally with strips with narrow led spacing to maintain 'dot free' effect

Model No	NL_HC_ALBA25_D_LS1613
Material	AL6063-T5
Surface Processing	Anodizing
Diffuser	Opal Polycarbonate
Light Transmittance	>60%
Heat Dissipation	Max 14W/m

Accessories

Mounting clip

NL_ALBA_MOUNTCLIP



Adjustable mounting clips

NL_ALBA_180CLIP
0-180 deg adjustable





NL_ALBA_90CLIP
0-90 deg adjustable




End caps

NL_ALBA_ECAP
Silver end caps without holes [2 pieces per set]

NL_ALBA_ECAP_WH
Silver end caps with holes [2 pieces per set]

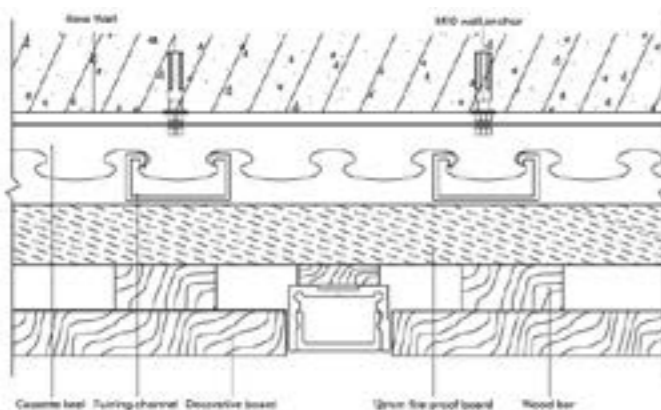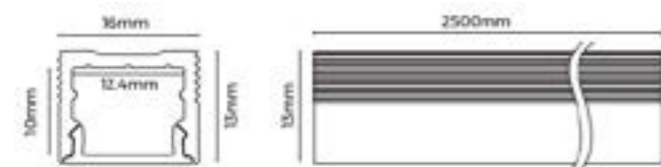

Apex 3030 Aluminium Channel

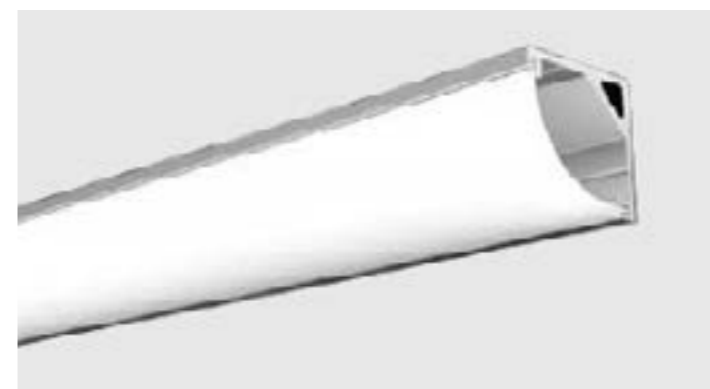

The APEX 3030 aluminium channel is supplied in 2.5m lengths and comes complete with white diffuser cover for consistent homogenous light effect

The APEX 3030 with its right angle format is designed to fit snugly into corners

It is a good option to use where a mix of horizontal and vertical illumination are required on surfaces

Channel is also provided with 2x PC end caps

It can be used with a range of led strips but ideally with strips with narrow led spacing to maintain 'dot free' effect. Also to be used with led strips that are a maximum of 15mm in width

Model No	NL_HC_APEX3030_PROFILE
Material	AL6063-T5
Surface Processing	Anodizing
Diffuser	Opal Polycarbonate
Light Transmittance	>85%
Heat Dissipation	Max 15W/m

Accessories

Mounting clip

NL_HC_APEX3030_FCSS
[4 pieces per set]



End caps


End caps silver [without hole]

NL_HC_APEX3030_ECH
[2 pieces per set]



End caps silver [with hole]

NL_HC_APEX3030_EC
[2 pieces per set]

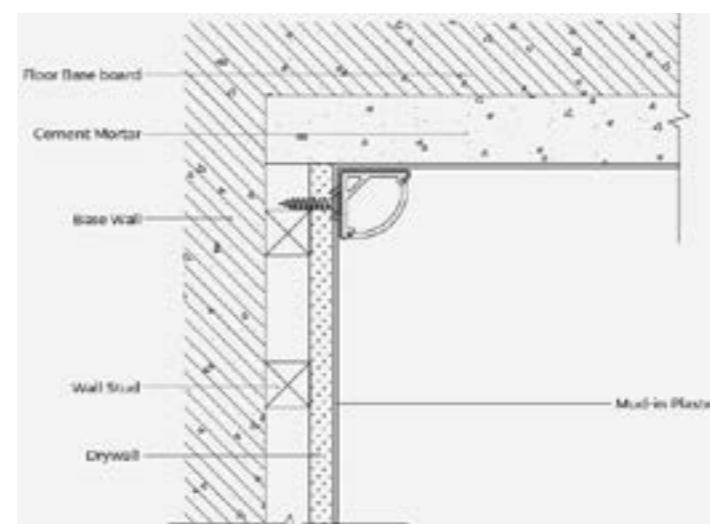



Apex 1616C Aluminium Channel





The APEX 1616 aluminium channel is supplied in 2.5m lengths and comes complete with white diffuser cover for consistent light effect

The APEX 1616 with its right angle format is designed to fit snugly into corners

It is a good option to use where a mix of horizontal and vertical illumination are required on surfaces

Channel is provided with 2x PC end caps

It can be used with a range of led strips but ideally with strips with narrow led spacing to maintain 'dot free' effect. Also to be used with led strips that are a maximum of 15mm in width

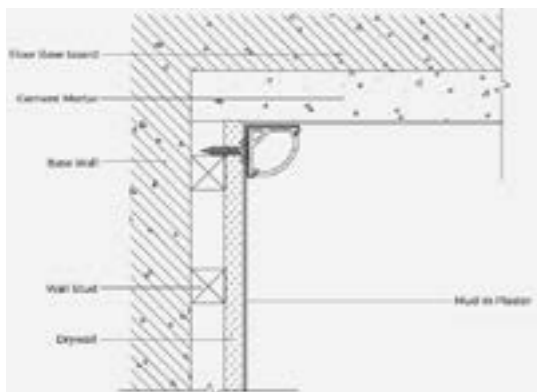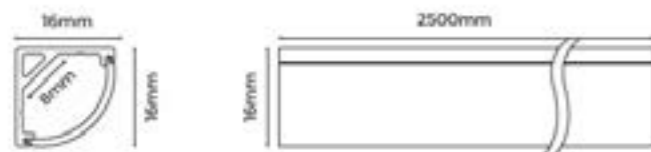

Model No NL_HC_APEX1616_PROFILE



Material	AL6063-T5
Surface Processing	Anodizing
Diffuser	Opal Polycarbonate
Light Transmittance	>70%
Heat Dissipation	Max 13W/m

Accessories - sold separately

Mounting clip


NL_HCAPEX_FCSS	
[4 pieces per set]	

End caps

End caps [without hole]	
NL_HC_APEX1616_ECH	[2 pieces per set]
End caps [with hole]	
NL_HC_APEX1616_EC	[2 pieces per set]



Brim 2727 Aluminium Channel


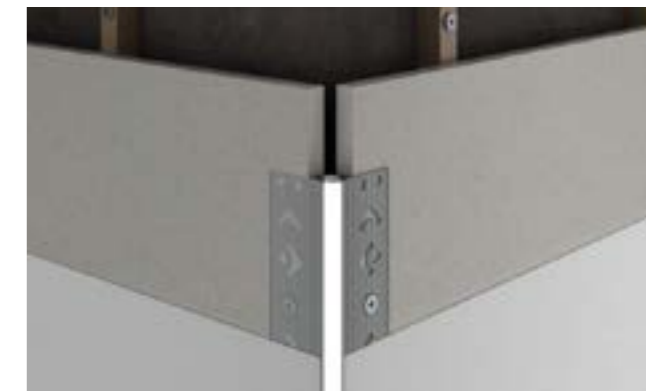


The BRIM 2727 profile is designed to be applied to the outer corner of a 90deg change in wall direction

The luminous surface provided on the polycarbonate cover is only 8mm wide for a very slim contemporary light effect produced after final plastering is complete over the side wings

LED Strips with a maximum width of 5mm to be only used inside the profile

The profile comes supplied standard with PC cover and 2x PC end caps

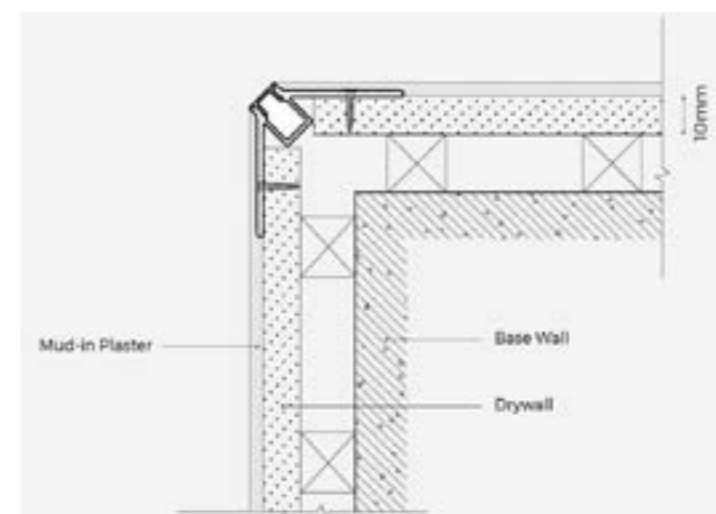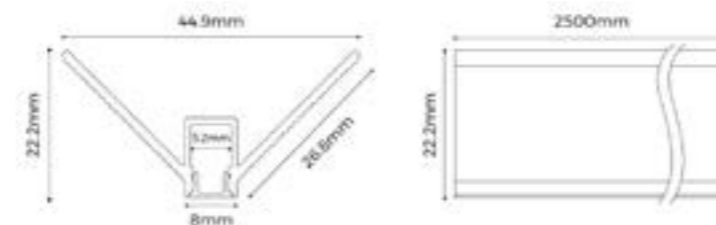



Model No NL_HC_BRIM2727_PROFILE

Material	AL6063-T5
Surface Processing	Anodizing
Diffuser	Opal Polycarbonate
Light Transmittance	>55%
Heat Dissipation	Max 9.6W/m

Accessories

End caps

End caps silver [without hole]	
NL_HC_BRIM2727_EC	[2 pieces per set]
End caps silver [with hole]	
NL_HC_BRIM2727_ECH	[2 pieces per set]



Argyle 1510 Aluminium Channel



Model No NL_HC_ARG1510_2.5_SILV

Material AL6063-T5

Surface Processing Anodizing

Diffuser Opal Polycarbonate

Light Transmittance >60%

Heat Dissipation Max 14W/m

Accessories

Mounting clip

NL_HC_ARG1510_CLIPS

End caps


NL_HC_ARG1510_ECAPS

The Argyle1510 aluminium channel is supplied in 2.5m lengths and comes complete with white diffuser cover for consistent homogenous light effect

The profile can be used as a surface mount fitting or can be flush mounted in joinery that has been routed out to suit dimensions below

Channel is also provided with 2x PC end caps

It can be used with a range of led strips but ideally with strips with narrow led spacing to maintain 'dot free' effect

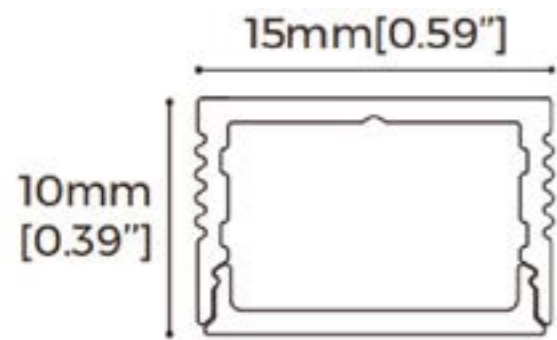

Gido 2409 Aluminium Channel



Model No NL_HC_GIDO_2.5M_BLACK

Material AL6063-T5

Surface Processing Anodizing

Diffuser Opal Polycarbonate

Light Transmittance >60%

Heat Dissipation Max 13W/m

Accessories

End caps

End caps [without hole]


NL_GIDO_ENDCAPS
[Silver x2 pieces per set]

End caps [with hole]

NL_GIDO_ENDCAPS_HOLE
[Silver x2 pieces per set]

Gido 2409 Aluminium Channel is a special local auxiliary lighting system. It can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment

"Dots-free" lighting
Perfect homogenous lighting
Soft light, bevel lighting
A wide range of installation accessories wide


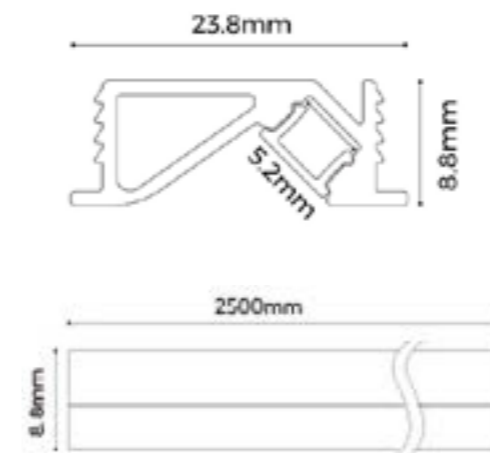




Neo 25 14.4W/m 24V RGB 360° Silicone Neon Strip



Neo25 14.4W/m 24V 27K 360° Silicone Neon Strip

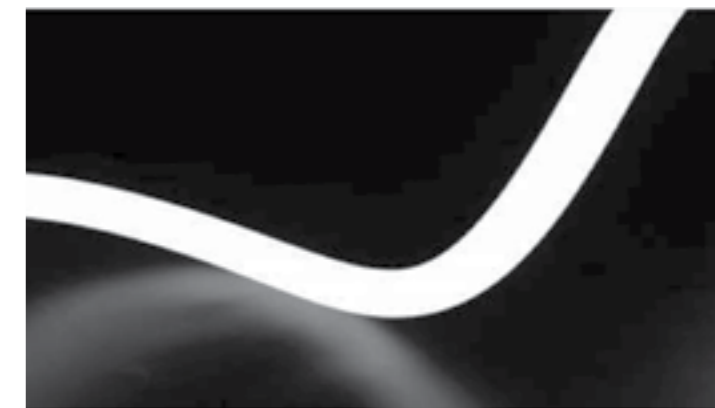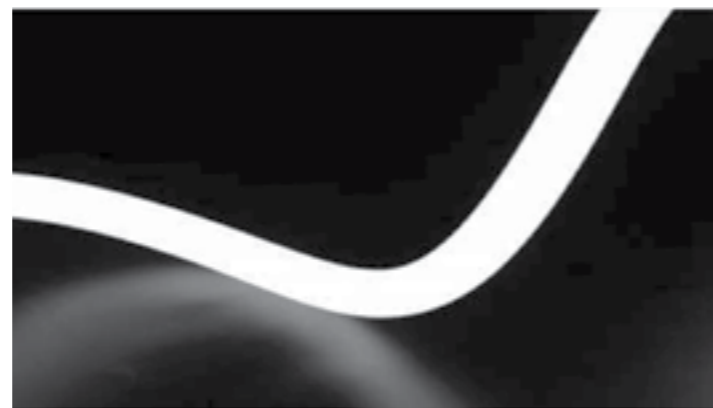

Neo 25 can achieve 360 degree uniform light emission without dark or dead spots.

With flexible material it can curved in to shapes or lines and is an ideal partner with your lighting designer or architect for artistic styling and decorative lighting

High luminous efficiency, passed LM80 test

Silicone extrusion process with IP65 protection level

Supports pendant & surface mounting installation

Winner of Reddot Award 2021

Model No NL_HC_NEO25_24RGB

Material Domoed silicone

Bending direction 360°

Section Size 25mm

CRI Ra>90

CCT RGB

Voltage DC 24V

Wattage 14.4W/m

Wire length 5000mm max

Neo 25 can achieve 360 degree uniform light emission without dark or dead spots.

With flexible material it can curved in to shapes or lines and is an ideal partner with your lighting designer or architect for artistic styling and decorative lighting

High luminous efficiency, passed LM80 test

Silicone extrusion process with IP65 protection level

Supports pendant & surface mounting installation

Winner of Reddot Award 2021

Model No NL_HC_2700KNEON_24V

Material Domoed silicone

Bending direction 360°

Section Size 25mm


CRI Ra>90

CCT 2700K


Voltage DC 24V

Wattage 14.4W/m

Wire length 5000 mm max

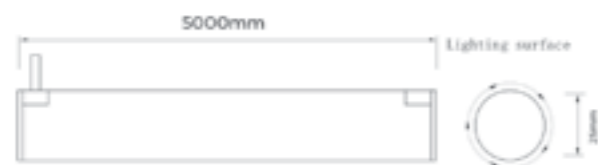

Vertical Pendant



Soaking



Vertical ceiling single



Vertical ceiling double




Horizontal ceiling



Horizontal sitting



Vertical Pendant



Soaking



Vertical ceiling single



Vertical ceiling double



Horizontal ceiling



Horizontal sitting



CE IP65



CE IP65



Neo RGB 9.6W 48V Silicone Neon Strip



Neo RGB is part of the side bend series which adopt unique optical structure design, featured in uniform lighting without shadow. The Neo design qualifies it for line outlining, indoor & outdoor decorative lighting

12mm width flat luminous surface, applied for indoor & outdoor decorative lighting, architectural outline lighting, etc.

High light efficacy, LM80 proved

Silicone extrusion process, IP67 protection level

Systematic installation solution for different installation requirements


Model No	NL_NEO1217_9.6W_RGB_48V
Material	Silicone
CCT	RGB
Voltage	48V
Wattage	9.6W
Max tape length	20m



CE IP65



Neo25 12.5w/m 48V 23K 360° Silicone Neon Strip

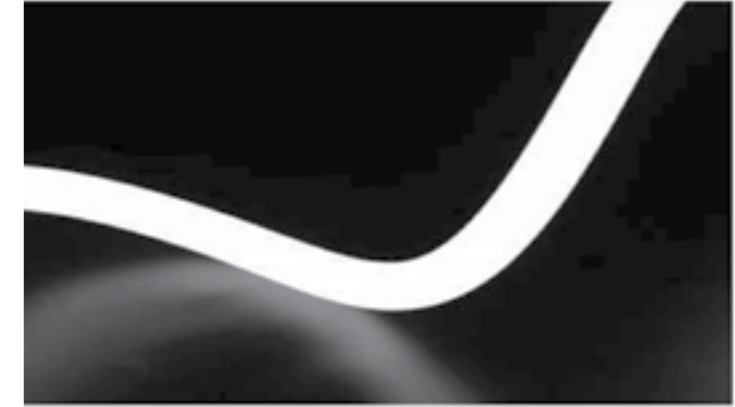

Neo 25 can achieve 360 degree uniform light emission without dark or dead spots.

With flexible material it can curved in to shapes or lines and is an ideal partner with your lighting designer or architect for artistic styling and decorative lighting



High luminous efficiency, passed LM80 test

Silicone extrusion process with IP65 protection level

Supports pendant & surface mounting installation

Winner of Reddot Award 2021

Model No	NL_HC_NEO25_48V2.3K
Material	Domed silicone
Bending direction	360°
Section Size	25mm
CRI	Ra>90
CCT	2300K
Voltage	48V DC
Wattage	12.5w/m
Length	20000mm max

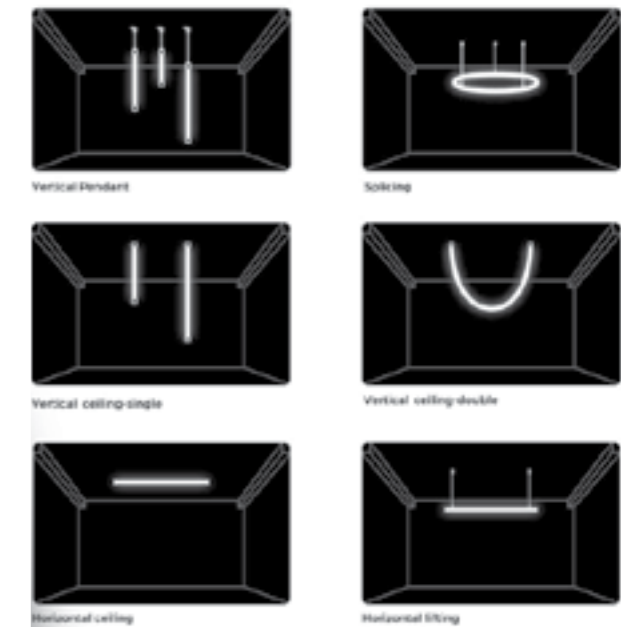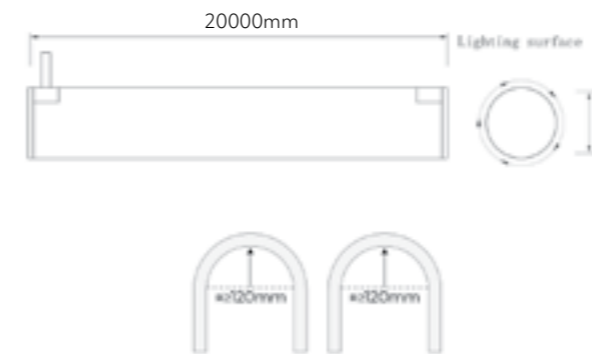

CE IP65





Koda 1911 Aluminium Channel



The Koda 1911 provides three sided, dot-free lighting which ensures uniform and soft lights.

An aluminium profile provides excellent heat dissipation performance.

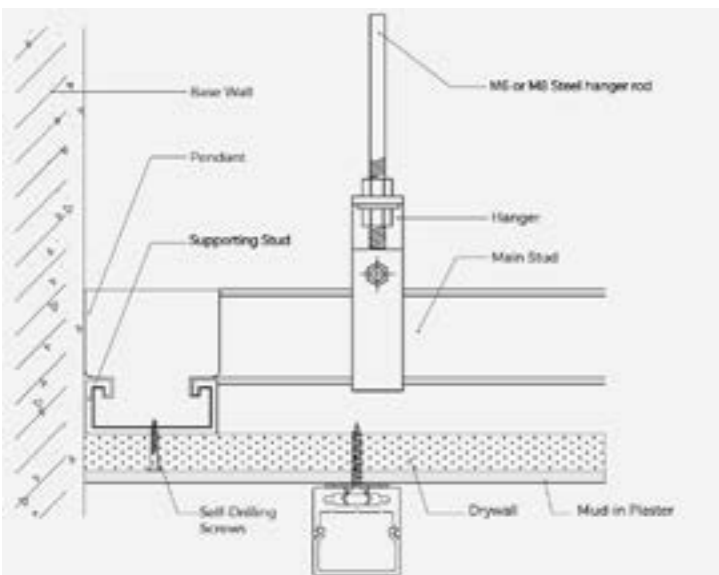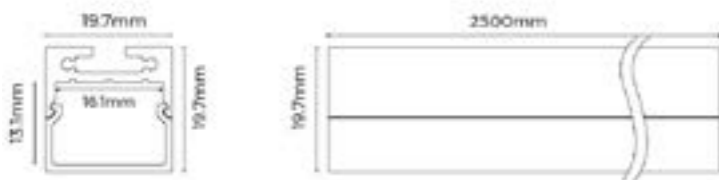

Model No NL_25_KODA_2.5M

Material AL6063-T5

Surface Processing Anodized

Diffuser Opal Polycarbonate

Light Transmittance >85%

Heat Dissipation Max 15W/m

Accessories

End Caps

NL_KODA_ENDCAPS
End cap without hole [2 pieces]



NL_KODA_ENDCAPS_HOLE
End cap with hole [2 pieces]

Mounting Clips

NL_KODA_MOUNTCLIP
Mounting Clip [4 pieces per set]



Suspension Kit


NL_KODA_WJUN
suspension kit 2M [with ceiling rose]



NL_KODA_NOJUN
suspension kit 2M [no ceiling rose]





Tunnel 3735 Aluminium Channel

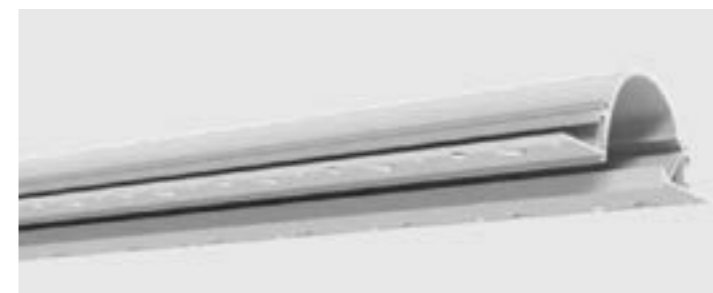

The Tunnel 3735 has a luminous surface opening

It's trimless recessed design allows it to integrate perfectly within ceiling or walls and provide a soft low glare lighting effect

Channel is supplied standard with polycarbonate cover and 2x end caps

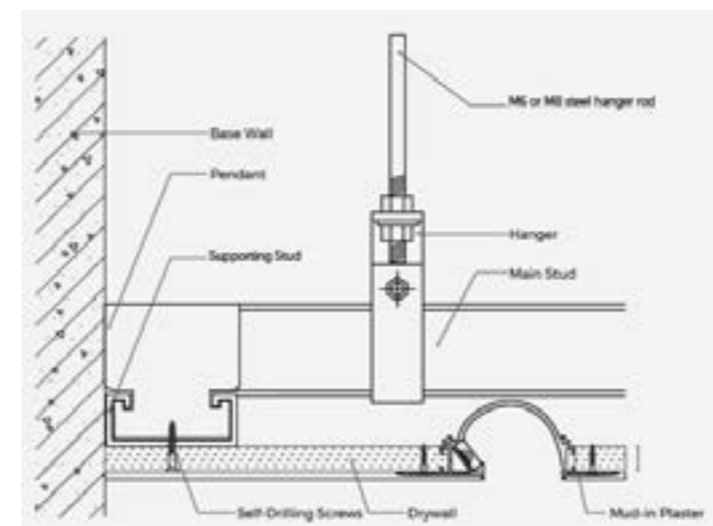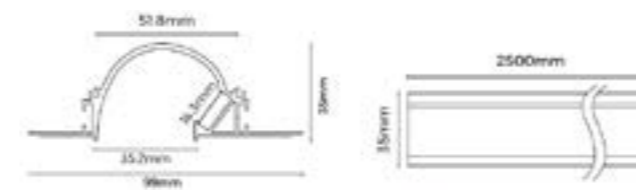

Model No NL_HC_TUNNEL

Material AL6063-T5

Surface Processing Spray painted RAL 90003 white

Diffuser N/A

Light Transmittance N/A

Max W tape

Heat Dissipation 19.2W/m

Accessories

End Caps - Aluminium

NL_HC_TUNNEL_ECAP






White
[2 pieces]



The LASE1612 profile and removable carrier allows a range of beam angles to be achieved [20°, 40°, 60° & 80°]

It is an ideal option for mounting onto a ceiling to minimize overspill and wastage of light beyond a defined horizontal area below [e.g countertop or desk surface]

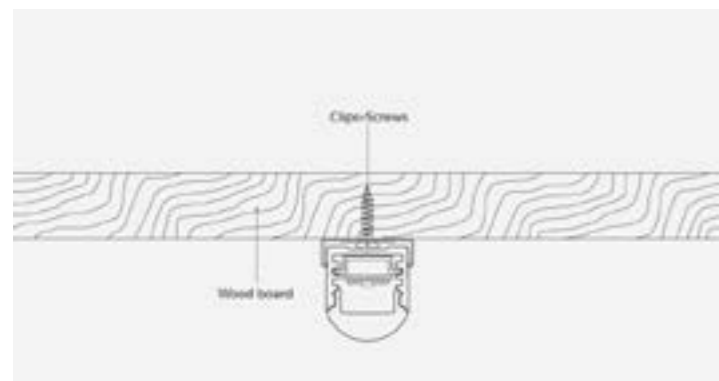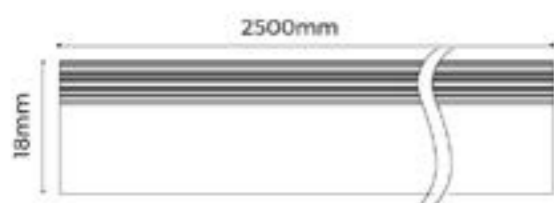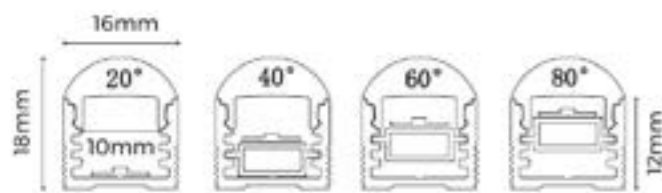


Model No	NL_LASE_2.5M_SILVER
Material	AL6063-T5
Surface Processing	Anodized
Diffuser	Opal Polycarbonate
Light Transmittance	>85%
Max W tape	14.4W
Heat Dissipation	

Accessories

End Caps	
NL_LASE_ENDCAPS_NO_HOLE	
End cap without hole [Silver x2 pieces]	
NL_LASE_ENDCAPS_HOLE	
End cap with hole [Silver x2 pieces]	



Finish	White RAL9003
Material	AL6063-T5
Light	
Transmittance	60%
Diffuser nature	White prismatic
Installation	Recessed
IP Grade	IP20
Dimensions	
Length	2500mm

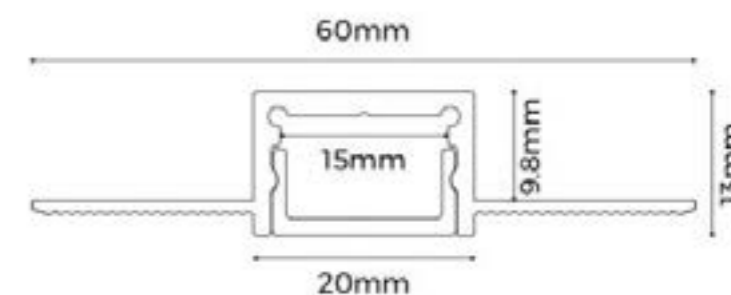


Shelter A 6013


Shelter B 6013



Finish	White RAL9003
Material	AL6063-T5
Light	
Transmittance	80%
IP Rating	IP20
Diffuser nature	Opal
Installation	Trimless recessed
Dimensions	
Length	2500mm

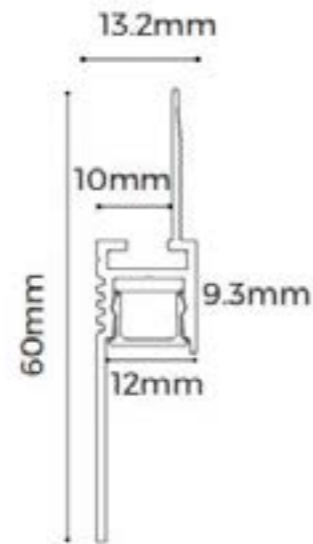

Finish	White RAL9003
Material	AL6063-T5
Light	
Transmittance	80%
IP Rating	IP20
Diffuser nature	Opal
Installation	Trimless recessed
Dimensions	
Length	2500mm

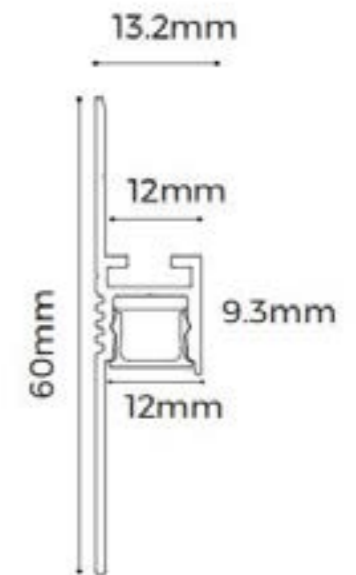


Holm 2513 Aluminium Channel



Finish	White RAL9003
Material	AL6063-T5
Light	
Transmittance	60%
IP Rating	IP20
Diffuser nature	White prismatic
Installation	Recessed

Dimensions	
Length	2500mm

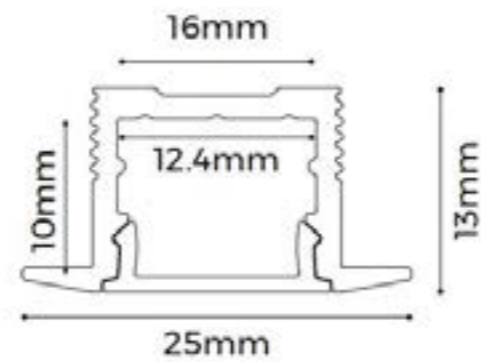

Condor 3CCT Pendant



Lamp	Inbuilt 60W
Finish	Black or White
Material	A16063-T5
Dimmable	No
CRI	Ra90
CCT	3000K-6500K
Voltage	AC200-240V
IP Rating	IP20

Dimensions	
Length	1800mm






Zen3535 Curved Aluminium Channel



The Zen 3535 Profile with no cover

With a diameter of 3m and a 45° arc, thousands of styles can be made with the connections of lines and arcs. 8 profiles to make 3m circle.

Specially designed light source with diffusers producing homogeneous and soft lighting

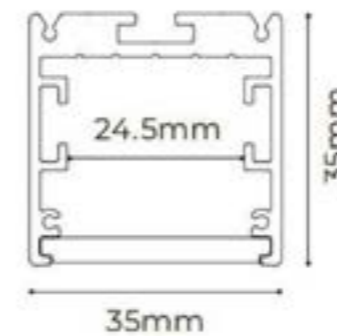

Material	AL6063-T5
Surface Processing	Spray
Diffuser	Opal Polycarbonate
Light Transmittance	65%
Max W tape	
Heat Dissipation	Max 9.6 W/m

Accessories

- End Caps
NL_HC_ZEN3535_EC
- Zen 3535 end caps+screws, silver 2 pcs
NL_HC_ZEN3535_EC_BK
- Zen 3535 end caps+screws, black 2 pcs
NL_HC_ZEN3535_SUSP_CABLE
- Zen 3535 suspension cable 4 mtrs x 2
NL_HC_ZEN3535_JOINER
- Zen 3535 connector kit black
NL_HC_ZEN3535_COVER
- Zen 3535 silicone flexible cover



Zen 3535 -2500mm Aluminium Channel



The Zen 3535 -2500mm Profile with no cover

Flexible diffuser making it easy for installation without connections for over length application and light leakage

Specially designed light source with diffusers producing homogeneous and soft lighting

Model No	NL_HC_ZEN3535_LINEAR_DN
Material	AL6063-T5
Surface Processing	Spray
Diffuser	Opal Polycarbonate
Light Transmittance	65%
Max W tape	
Heat Dissipation	Max 9.6 W/m

Accessories

End Caps

NL_HC_ZEN3535_EC

Zen 3535 end caps+screws, silver 2 pcs

NL_HC_ZEN3535_EC_BK

Zen 3535 end caps+screws, black 2 pcs

NL_HC_ZEN3535_SUSP_CABLE


Zen 3535 suspension cable 4 mtrs x 2

NL_HC_ZEN3535_JOINER

Zen 3535 connector kit silver


NL_HC_ZEN3535_COVER

Zen 3535 silicone flexible cover

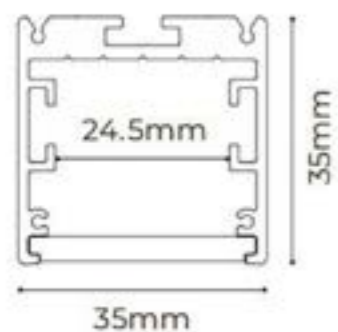




Magno 48V Track System

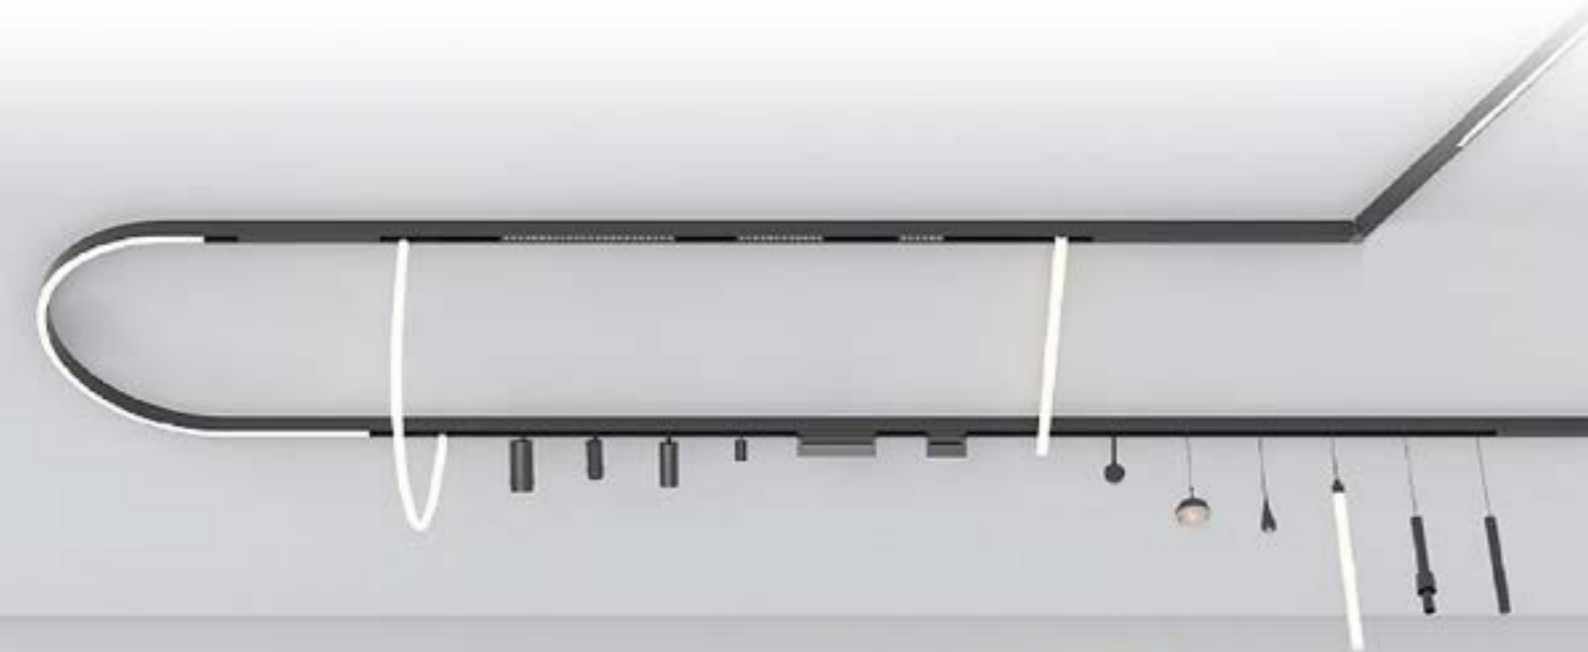

Magno Zoom 8W 48V

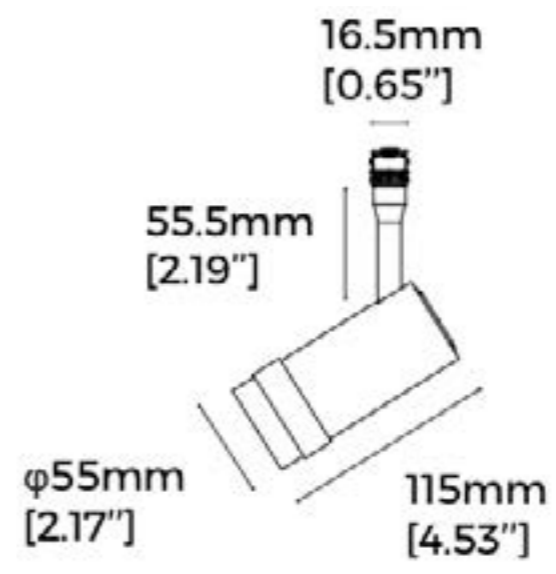

Material	AL6063-T5
Size	Ø55mm x 115mm
Lumens	470LM
Diffuser nature	Lens
Wattage	8W
CCT	2700K
CRI	Ra90
Beam angle	15° - 40° adjustable
Voltage	48V
Dimmable	Tuya Bluetooth
Finish	Black
IP Rating	IP20
Installation	Track mounted




CE IP20

Magno Fixed 10W 48V Track Spot




Material	AL6063-T5
Size	Ø52mm x 120mm
Lumens	805LM
Diffuser nature	Lens
Wattage	10W
CCT	2700K
CRI	Ra90
Beam angle	36°
Voltage	48V
Dimmable	Dali Dimmable
Finish	Black
IP Rating	IP20
Installation	Track mounted

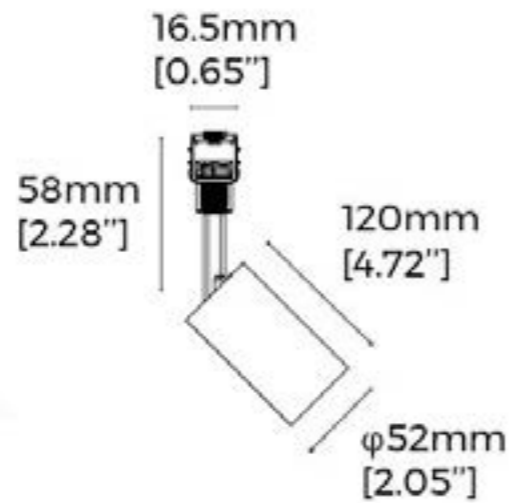

Magno 600 Diffuser 48V



Length	600mm
Diffuser	Opal
Wattage	14W
Lumen	980Lm
CCT	2700K
CRI	Ra90
Beam angle	100°
Voltage	48V
Dimmable	Tuya Bluetooth
Finish	Black
IP Rating	IP20
Installation	Track mounted

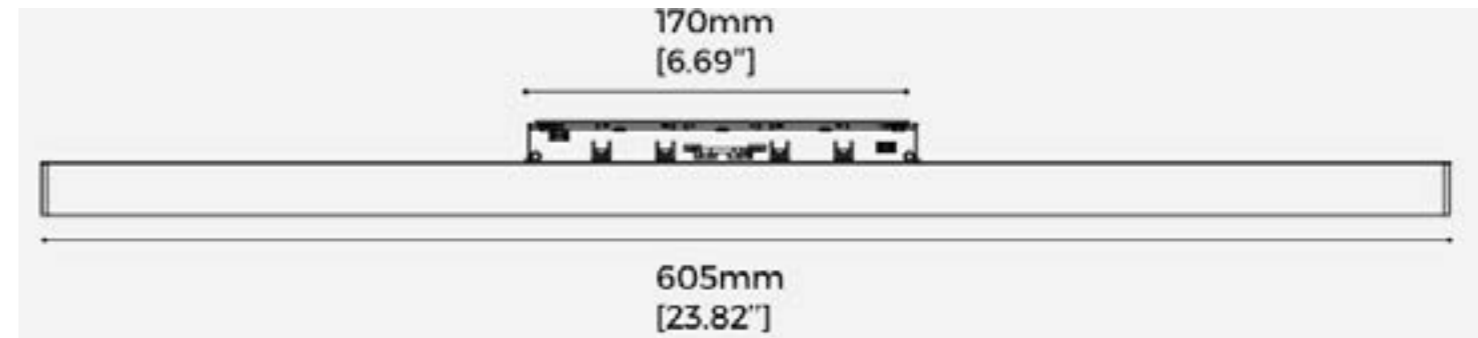

Magno 440 Grate 48V




Material	AL6063-T5
Length	440mm
Diffuser nature	Grating
Wattage	24W
Lumen	1840Lm
CCT	2700K
CRI	Ra90
Beam angle	55°
Voltage	48V
Dimmable	Tuya Bluetooth
Finish	Black
IP Rating	IP20
Installation	Track mounted



CE □ IP20


Magno Track SS 3000 Surface/Suspension 48V

Material	AL6063-T5
Finish	Black
Length	3000mm
Input Voltage	48V

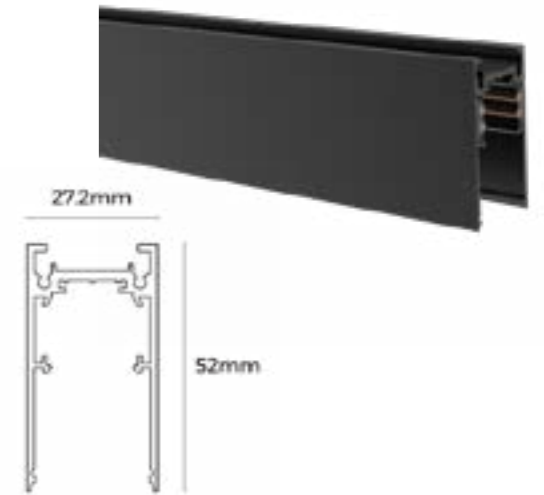


Magno Track SS 800 90° Surface/Suspension 48V

Material	AL6063-T5
Finish	Black
Length	Ø800mm x 90°
Input Voltage	48V

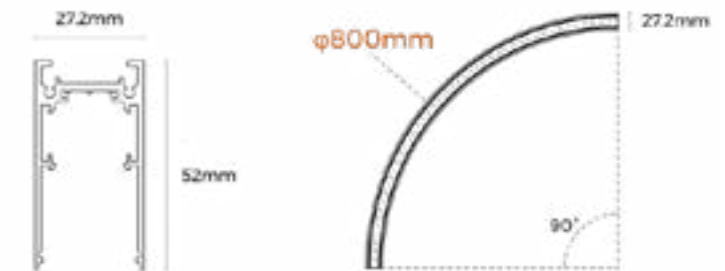

Magno Track R 48V 2000 Recessed

Material	AL6063-T5
Finish	Black
Size	L2000mm x W64mm x H46.5mm
Input Voltage	48V

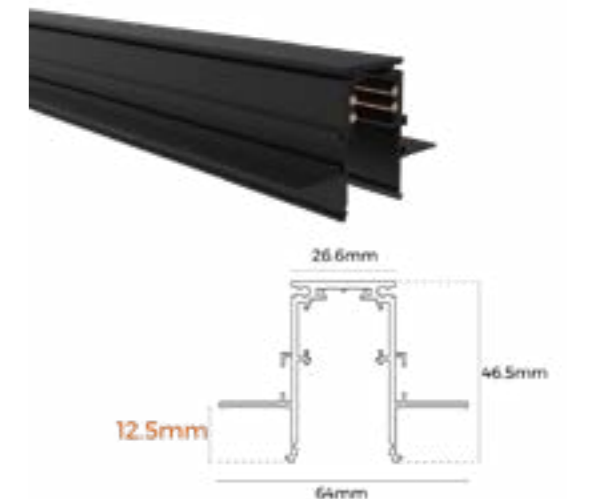



Magno Corner Blind Diffuser

Material	AL6063-T5
Diffuser nature	Blind diffuser
Finish	Black
Size	L50mm x W120mm x H52mm

Magno In Track 48V Transformer 200W Non Dimmable

Finish	Black
Size	L365mm x W22mm x H44mm
Input Voltage	48V
Power	200W



Magno End Caps

Material	ADC12
Finish	Black
Size	L52mm x W27.2mm x H5.5mm



Magno Live End Connector with 1500mm Cable 48V

Finish	Black
Size	L147mm x W19mm x H17.3mm
Cable	1.5m

Magno L Power Connector 48V



Material	AL6063-T5
Finish	Black
Size	L120mm x W27.2mm x H52mm
Voltage	48V

Magno Straight Joiner 48V

Finish	Black
Size	L138mm x W18mm x H18mm





Magno Suspension Kit 1500mm

Material	AL6063-T5
Finish	Silver
Length	1500mm
Quantity	2PCS/Set

Magno Ceiling Fixing Bracket Kit

Size	L67.5mm x W31.5mm x H7.5mm
Quantity	2PCS/Set



Accento 230V Track System

Accento L90-LS40

Material	AL6063-T5
Installation	L-shaped 90° splicing
Diffuser	Blind diffuser
Size	L200mm x W200mm x H83mm
Colour	Black



Accento PR-LS40



Material	Aluminium
Colour	Black
Length	2500mm

Accento CV-S40FB Blind Diffuser

Diffuser nature	Blind cover
Material	Aluminium
Size	L2500mm x W42.6mm x H29.6mm
Colour	Black




Accento T-12002520

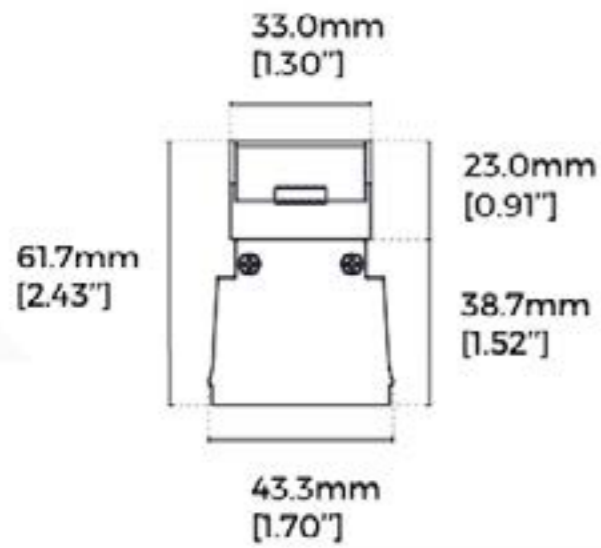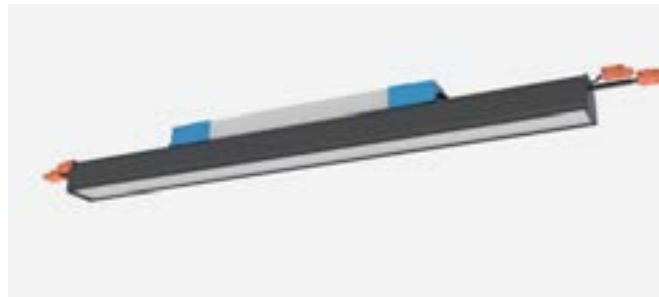

Material	AL6063-T5
Finish	Black RAL9005
Diffuser nature	Prismatic
Wattage	28W
CCT	3000K - 6500K
CRI	Ra90
Lumen	2520Lm
Voltage	AC220-240V
Dimmable	No
IP Rating	IP20
Installation	Ceiling
Length	1200mm



Accento T-2.8

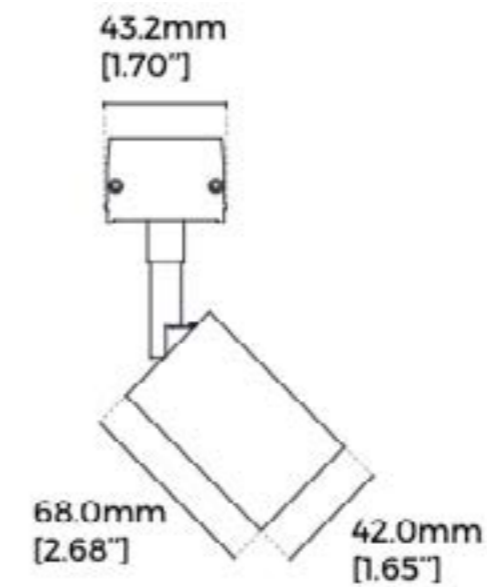

Material	AL6063-T5
Finish	Black RAL9005
Spotlight angle	36°
Wattage	2 x 8W
CCT	3000K
CRI	Ra90
Lumen	2 x 520Lm
Voltage	AC220-240V
Dimmable	No
IP Rating	IP20
Installation	Ceiling





Accento T-12003220

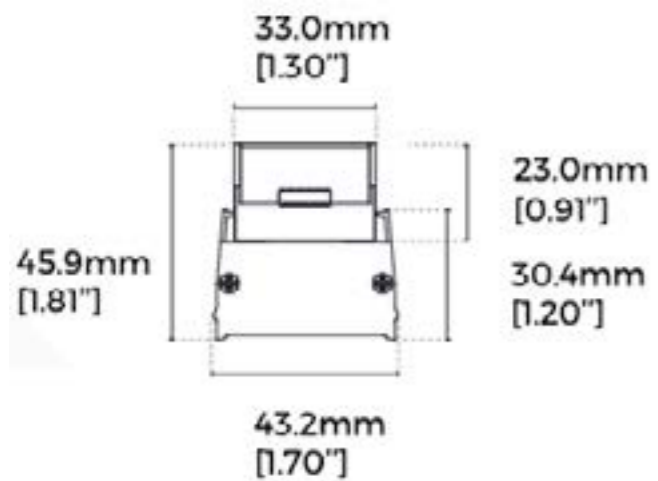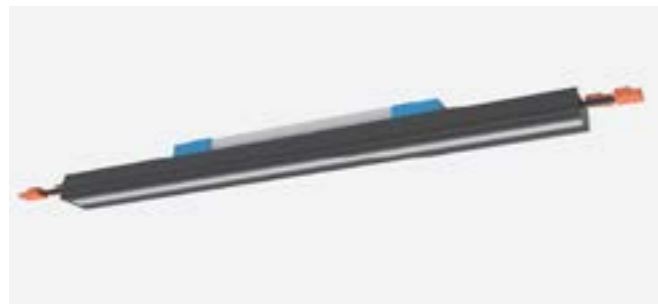

Diffuser nature	Opal
Material	AL6063-T5
Finish	Black RAL9005
Beam angle	100° x 45°
Wattage	28W
CCT	3000K - 6500K
CRI	Ra80
Lumen	3220Lm
Voltage	AC220-240V
Dimmable	No
IP Rating	IP20
Installation	Ceiling
Length	1200mm



Accento T-6001500

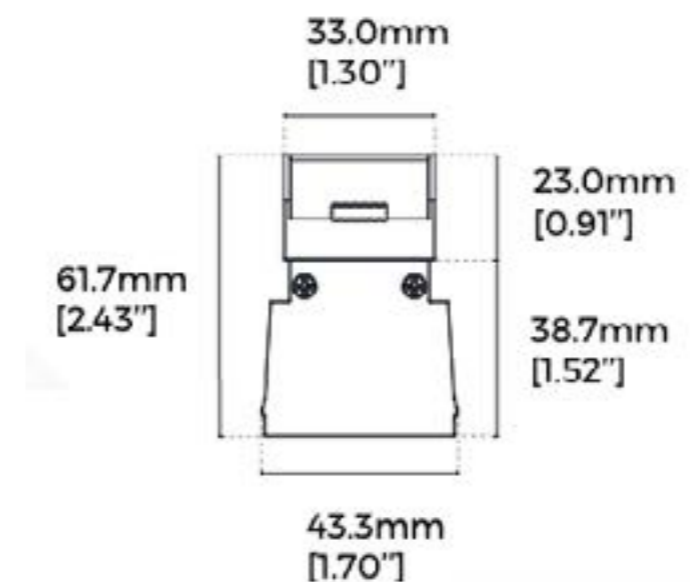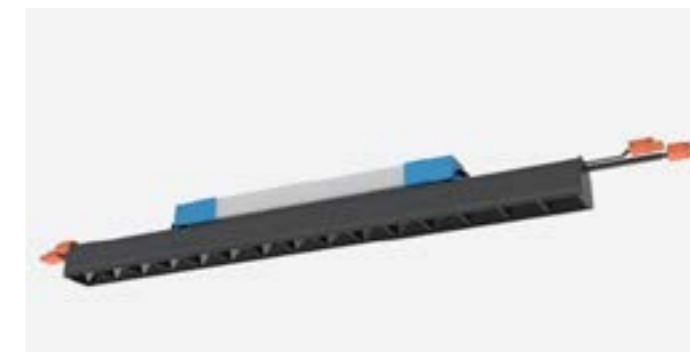

Diffuser nature	Grating
Material	AL6063-T5
Finish	Black RAL9005
Grille angle	30°
Wattage	15W
CCT	2700K - 6500K
CRI	Ra90
Lumen	1500Lm
Voltage	AC220-240V
Dimmable	No
IP Rating	IP20
Installation	Ceiling
Length	600mm




CE IP20





CE IP20

Accento T-400390

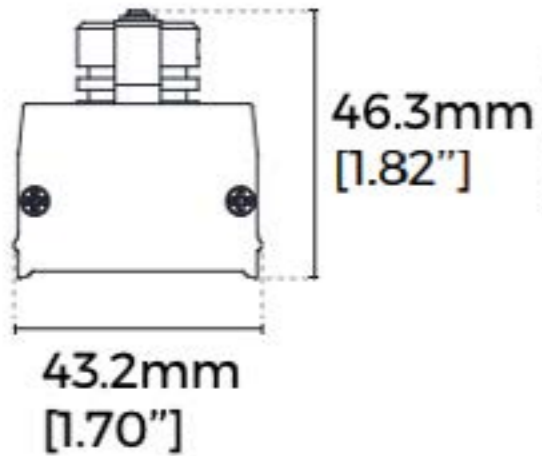

Material	AL6063-T5
Finish	Black RAL9005
Spotlight angle	45°
Wattage	6W
CCT	3000K
CRI	Ra90
Lumen	390Lm
Voltage	AC220-240V
Dimmable	No
IP Rating	IP20
Installation	Ceiling
Length	400mm

Accento T-6001275

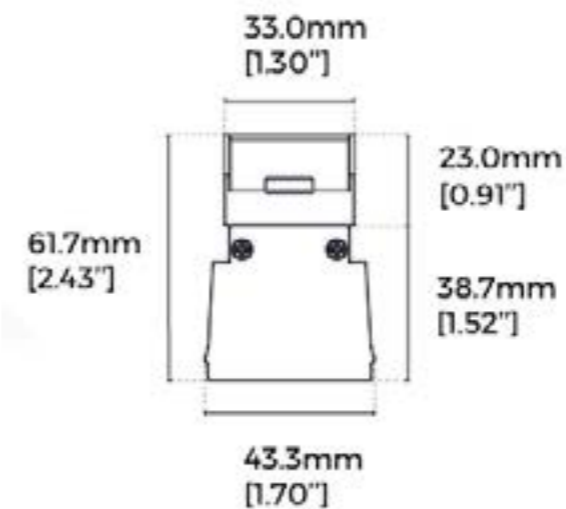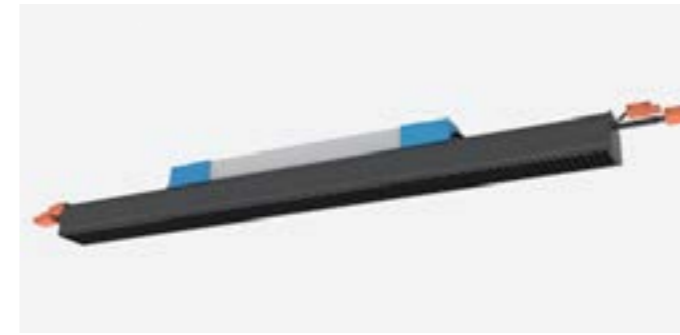

Diffuser nature	Honeycomb
Material	AL6063-T5
Finish	Black RAL9005
Wattage	17W
CCT	3000K - 6500K
CRI	Ra90
Lumen	1275Lm
Voltage	AC220-240V
Dimmable	No
IP Rating	IP20
Installation	Ceiling
Length	600mm



Accento CM-11

Material	PVC
Size	1000mm x Ø6mm
Quantity	1PCS/set
Wire diameter	18AWG



Accento PY-D Suspension Kit with Ceiling Plate

Length	4000mm
Quantity	2PCS/set
Colour	Black
Installation	Pendant

Accento CM-12

Material	PVC
Size	1000mm x Ø6.5mm
Quantity	1PCS/set
Wire diameter	18AWG




Accento PN-D Suspension Kit without Ceiling Plate

Length	4000mm
Quantity	2PCS/set
Colour	Silver
Installation	Pendant



Accento EX-46 Track Splicing Accessory

Material	SPCC
Colour	Silver
Size	L135mm x W41.4mm x H42.2mm
Quantity	1PCS/set

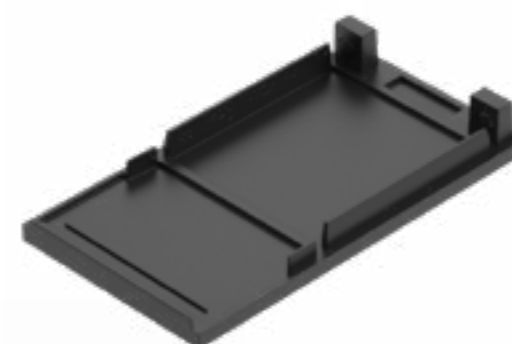

Accento EC-LS40

Material	PVC
Colour	Black
Size	L83mm x W45mm H11.5mm
Quantity	2PCS/set



4.8W 24V IP67 LED Amber Yellow Flexstrip, 5 metre roll



4.8W 24V IP67 LED amber yellow flexstrip. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

White option	Amber Yellow
Voltage	24VDC
Lumen output	276Lm



Dimensions	
Roll size	L5000mm x W10mm x H4mm



CE □ IP67



4.8W 24V IP65 LED Extra Warm White Flexstrip, 5 metre roll



4.8W 24V IP65 LED white flexstrip. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

	2100K Extra Warm White
Voltage	24VDC
Lumen output	276Lm



Dimensions	
Roll size	L5000mm x W10mm x H4mm



CE □ IP67



9.6W/m 24V IP20 LED White Flexstrips, 5 metre roll

9.6W/m 24V IP20 LED white flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

White options	2700K warm white
	3000K
	4000K daylight white
Voltage	24VDC

Dimensions	
Roll length	5000mm
Roll width	8mm
Roll height	2mm



CE □ IP20



9.6W/m 24V IP67 LED White Flexstrips, 5 metre roll

9.6W/m 24V IP67 LED white flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

White options	2700K Warm White or
	4000K Daylight White
Voltage	24VDC

Dimensions	
Roll size	
Length	5000mm
Width	10mm
Height	4mm



CE □ IP67

14.4W/m 24V IP67 LED Amber Yellow Flexstrip, 5 metre roll



14.4W/m 24V IP67 LED amber yellow flexstrip. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

Colour	Amber Yellow
Voltage	24VDC

Dimensions

Length	5000mm
Width	12mm
Height	4mm



14.4W 24V IP67 LED White Flexstrips, 5 metre roll




14.4W 24V IP67 LED white flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

White option	2100K Extra Warm White
Voltage	24VDC
Lumen output	809Lm

Dimensions

Roll size	L5000mm x W10mm x H2mm
-----------	------------------------

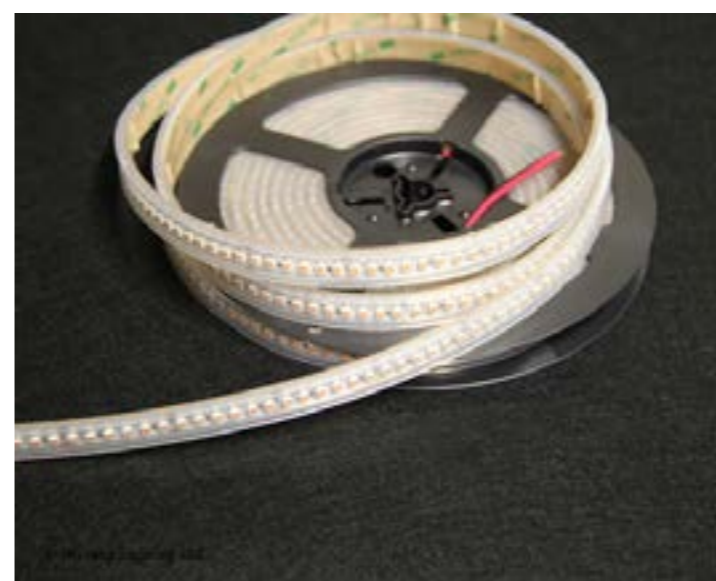



14.4W/m 24V IP65 LED R.G.B. Flexstrip, 5 metre roll



14.4W/m 24V IP67 LED R.G.B (2700K) Flexstrip, 5 meter roll



14.4W/m 24V IP65 LED RGB flexstrip. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.



Colour	RGB colour changing
Voltage	24VDC



Dimensions	
Roll size	
Length	5000mm
Width	12mm
Height	4mm



14.4W/m 24V IP67 LED R.G.B (2700K) flexstrip. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

Colour	RGB + 2700K
Voltage	24VDC



Dimensions	
Roll length	5000mm
Roll width	12mm
Roll height	4mm



CE □ IP65



CE □ IP67



14.4W/m 24V IP67 LED R.G.B.WW (2100K) Flexstrip, 5 metre roll



14.4W/m 24V IP67 LED R.G.B.WW (2100K) flexstrip. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

Colour	RGB + 2100K Extra warm white
Voltage	24VDC

Dimensions	
Roll length	5000mm
Roll width	12mm
Roll height	4mm



19.2W/m 24V IP67 LED White Flexstrips, 5 metre roll



19.2W/m 24V IP67 LED white flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

White options	2100K Extra warm white or 4000K Daylight white.
Voltage	24VDC

Dimensions	
Heat shrink roll size	
Length	5000mm
Width	10.2mm
Height	2.2mm
Silicone tube roll size	
Length	5000mm
Width	12mm
Height	4mm



4.3W/m 24V IP20 2700K Flexstrip




4.3W/m 24V IP20 2700K Flexstrips. 20m max per roll. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting for events, bars and night clubs.

White options	2700K warm white
Voltage	24VDC

Dimensions

Roll size	
Length	Max 20m
Width	10mm
Height	1.7mm

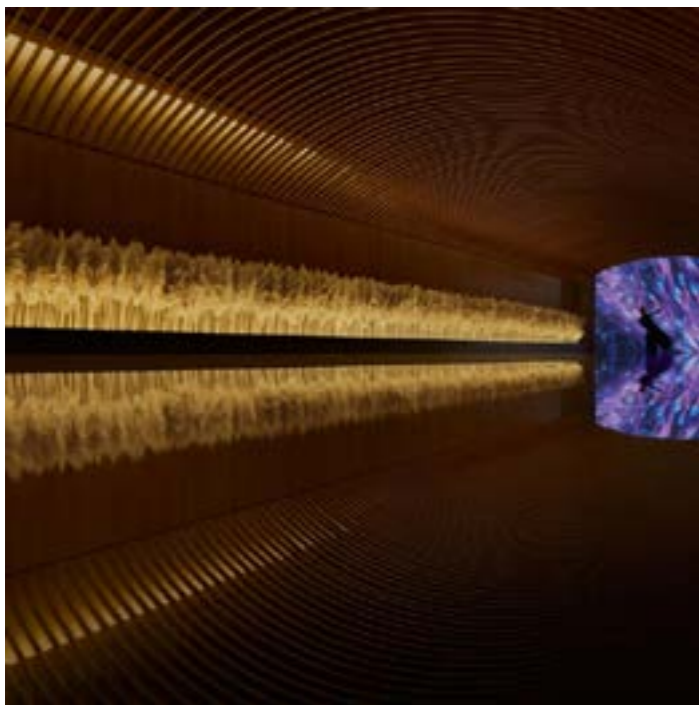

Neo 2700K 9.6W 48V Silicone Neon Strip



Neo 2700K is part of the side bend series which adopt unique optical structure design, featured in uniform lighting without shadow. The Neo design qualifies it for line outlining, indoor & outdoor decorative lighting.

12mm width flat luminous surface, applied for indoor & outdoor decorative lighting, architectural outline lighting, etc.


High light efficacy, LM80 proved

Silicone extrusion process, IP67 protection level

Systematic installation solution for different installation requirements



Material	Silicone
CCT	2700K
Voltage	48V
Wattage	9.6W
Max tape length	20m
Lumen	410Lm

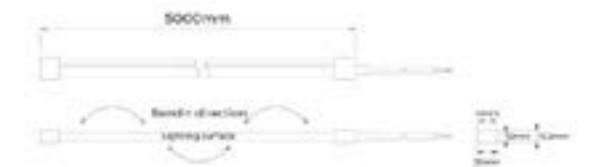

Neo 5.3W 48V Silicone Neon Strip

Neo is part of the side bend series which adopt unique optical structure design, featured in uniform lighting without shadow. The Neo design qualifies it for line outlining, indoor & outdoor decorative lighting.


12mm width flat luminous surface, applied for indoor & outdoor decorative lighting, architectural outline lighting, etc.

High light efficacy, LM80 proved

Silicone extrusion process, IP67 protection level

Systematic installation solution for different installation requirements

Material	Silicone
CCT	3000K/4000K
Voltage	48V
Wattage	5.3W
Max tape length	20m
Lumen	410Lm

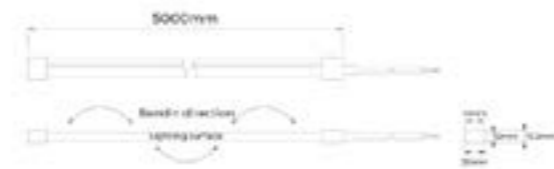


7.2W/m 24V IP20 Slim 8mm Flexstrip

7.2W/m 24V IP20 LED slim flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting.

White option	2700K
Voltage	24VDC
Lumen	710Lm

Dimensions

Roll size	
Width	8mm
Length	Max 5m
Height	1.2mm

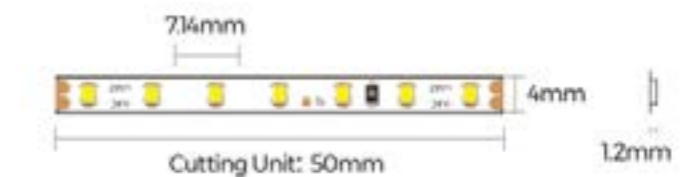

7.2W/m 24V IP20 Slim 4mm Flexstrip

7.2W/m 24V IP20 LED slim flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting.

White option	2700K
	3000K
Voltage	24VDC
Lumen	710Lm

Dimensions

Roll size	
Width	4mm
Length	Max 5m
Height	1.2mm





9.6W/m 24V IP20 LED Flexstrip

9.6W/m 24V IP20 LED white flexstrips. Max 20 metre roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting

White options	2300K/2700K/3000K
Voltage	24VDC

Dimensions

Roll size	
Max length	20m
Width	12mm
Height	1.6mm

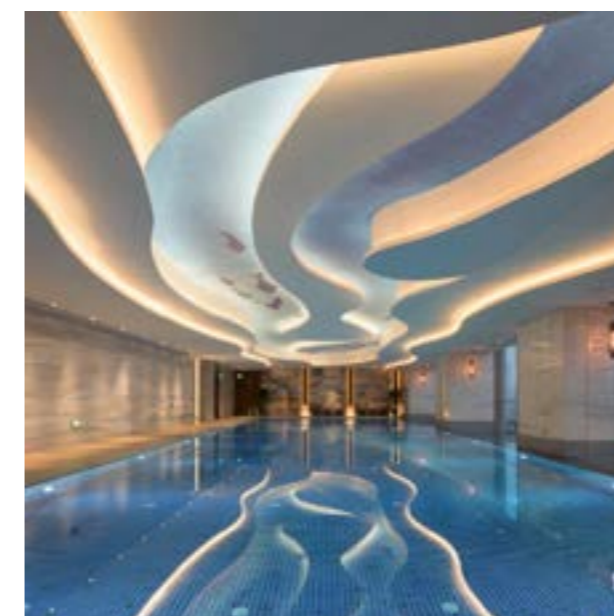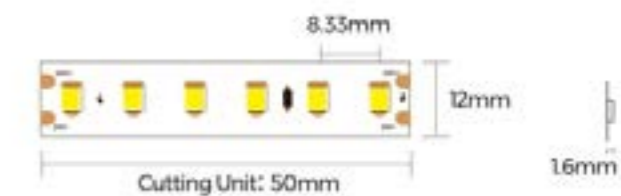





9.6W/m 24V IP20 2700K Flexstrip, 5 metre roll

9.6W/m 24V IP20 LED white flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and high efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting.

White option	2700K
Voltage	24VDC

Dimensions

Roll size	
Width	8mm
Height	1.6mm
Length	5m

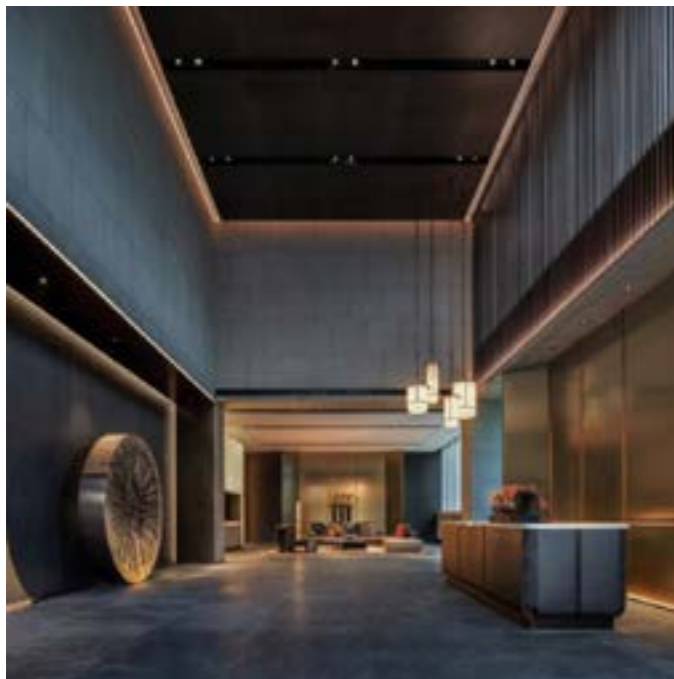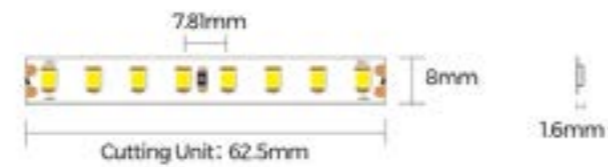



9.6W/m 24V IP65 2700K Flexstrip, 5 metre roll

9.6W/m 24V IP65 LED white flexstrips. 5 metres per roll. Green technology, environmental friendly, high energy saving and high efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting.

White option	2700K
Voltage	24VDC

Dimensions

Roll size	
Width	8mm
Height	1.6mm
Length	5m

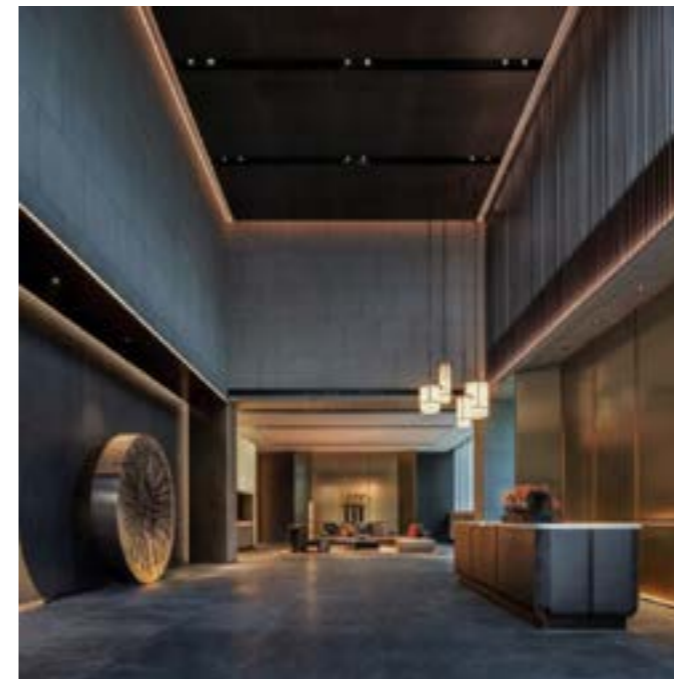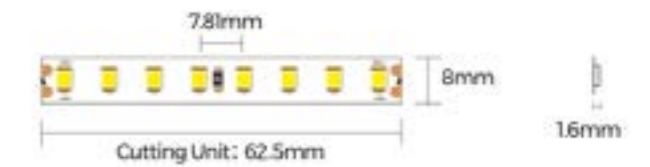



9.6W/m 24V IP65 3000K Flexstrip, 10 metre roll

9.6W/m 24V IP65 LED white flexstrips. 10 metres per roll. Green technology, environmental friendly, high energy saving and light efficiency. Applications: Cove lighting, Architectural lights for corridors, windows and decorative lighting.

White option	3000K
Voltage	24VDC

Dimensions

Roll size	
Width	8mm
Height	1.6mm
Length	10m

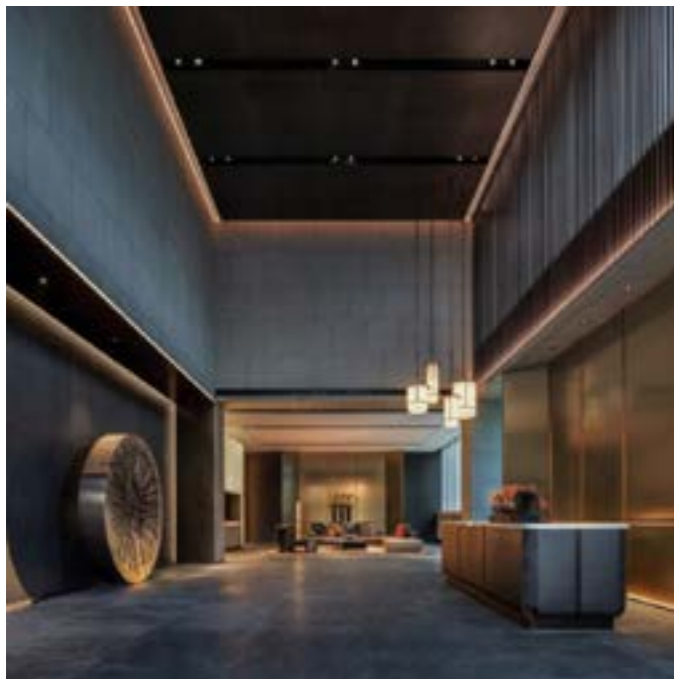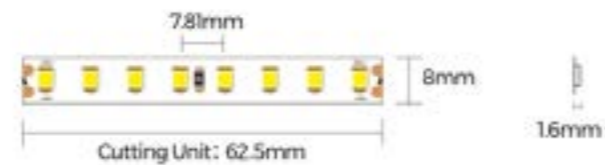

Plot 0.3W Recessed 12V LED Steplight, Warm White 2700K



The Plot 0.3W recessed 12V LED steplight, warm white 2700K. Also available in an amber output version. ROHS compliant & CE certified.



Lamp	0.3W LED
------	----------

Dimensions

Diameter	30mm
Depth	12mm
Cut out ø	24mm

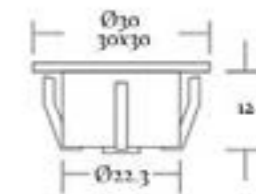

Plot 0.3W Recessed 12V LED Steplight, Amber



The Plot 0.3W recessed 12V LED steplight, amber. Also available in an warm white output version. ROHS compliant & CE certified.

Lamp	0.3W LED
------	----------

Dimensions

Diameter	30mm
Depth	12mm
Cut out ø	24mm

